



IN LINE DIESEL



DIESEL




X



STANDARD

PULSE OUT

OUTLET
POSITIONBRASS
FITTINGS

FEATURES	DISPLAY
Measuring system:	Turbine
IP Protection:	IP55
Power supply:	2 x 1,5V AAA
Pulse signal [imp/out]:	/
Cable [m]:	/
Partial [digits]:	4 + 2 decimal
Totalizer [digits]:	6
Unit of measure:	litre, gallons, pints, quarts, customized
Battery level indicator:	Yes
Min flow rate [l/min]:	10
Max flow rate [l/min]:	150
Max pressure [bar/psi]:	3,5/51
Precision [%]:	± 0,5
Repeatability [%]:	0,2
Display rotation:	Complete with click every 180°
Inlet/Outlet [BSP/G]:	1" F
Body material:	PA 66 (Black)
Turbine material:	POM-C
O-Ring material:	NBR
Other materials in contact with the fluid	Brass, Steel
Operating Min/Max Temperature [°C]:	-10 / +60
Allowed fluids:	Diesel
Forbidden fluids:	Gas, Alcohol, Gasoline, Water
Loudness at less 1 meter [dBA]:	< 70
Net weight [Kg]:	0,25
Single size packaging [mm]:	l 145 x b 135 x h 85
Gross weight [Kg]:	0,35

FUNCTIONS:

Resettable partial
Total non-resettable
Resettable totalizer period
Instantaneous flow rate display

Calibration
Showing latest 5 refuelling
Stock display
Low stock alarm





documento - document

ingombri - overall dimensions

prodotto - product

MADE IN ITALY 



In Line



X



black cover: diesel

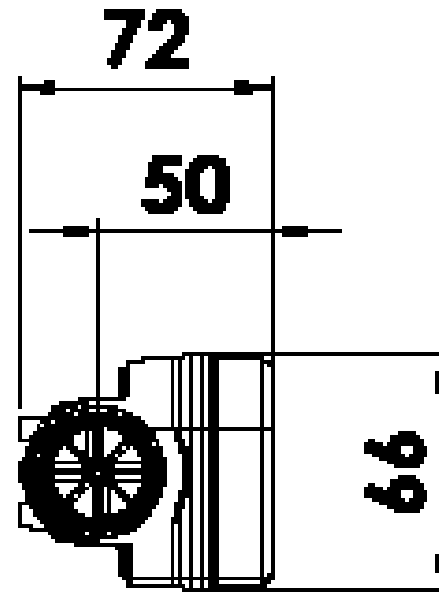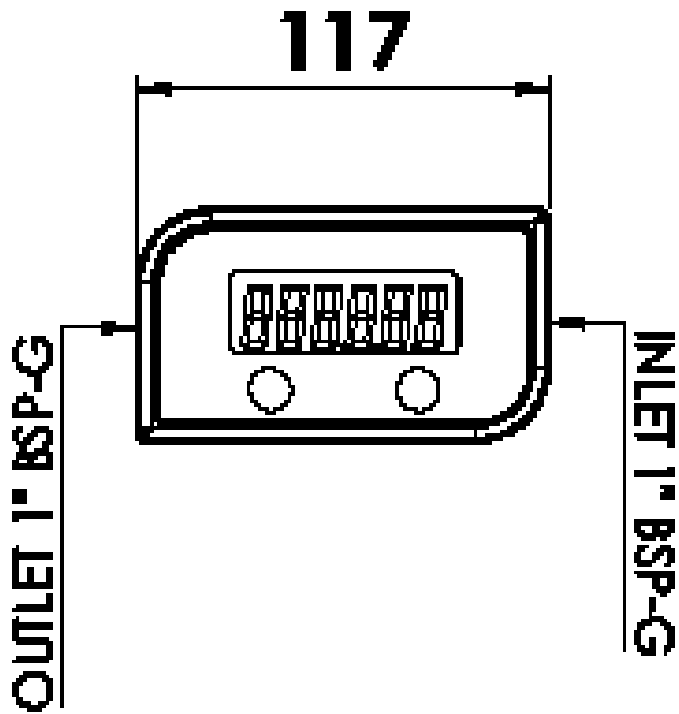

tutte le dimensioni espresse in mm - all dimensions are in mm