


# LIFTING COMPONENTS

## Grade S Safety Dee Shackle

### DESCRIPTION

- Forged: quenched and tempered with alloy pin
- WLL permanently shown on every shackle
- Hot dip galvanised body, yellow pin
- Fatigue rated

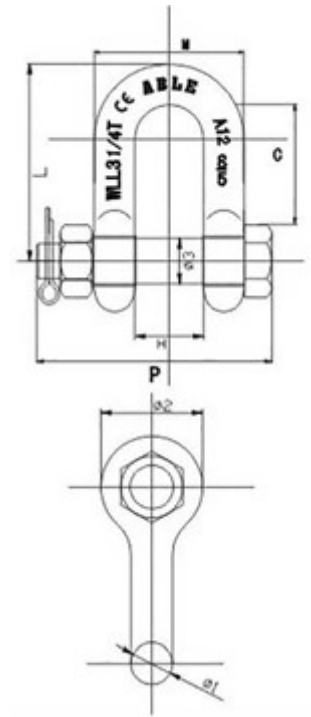

Part Number	WLL (T)	SIZE (mm)	Weight (Kg)	Dimensions in (mm)							
				H	Ø3	Ø1	Ø2	C	L	M	P
06DSS05T	.5	6	.05	12	8.5	6.5	15	15	32	25	40
06DSS075T	.75	8	.08	13	9.5	8.5	18	20	40	30	50
06DSS01T	1	10	.14	17	11.2	10	25	30.9	59	37	57.5
06DSS01.5T	1.5	11	.21	18.5	12.7	11.3	27	36.4	67.3	40.5	64.5
06DSS02T	2	13	.32	20.6	15.8	12.7	31	41.4	77.5	46	74.5
06DSS03.25T	3.25	16	0.61	27	18.8	16	40	51	96.5	59	93
06DSS04.75T	4.75	19	1.04	32	22	19.1	48	63	117	70	107
06DSS06.5T	6.5	22	1.53	37	25	22	54	72	133.5	81	121
06DSS08.5T	8.5	25	2.26	43.5	28	26.5	60	81.8	150.8	93.5	137
06DSS09.5T	9.5	29	3.37	48	32	29	68	94	173	106	145
06DSS12T	12	32	4.41	53	35	32	76	102	189.5	117	167
06DSS13.5T	13.5	35	6.98	57	38	35	84	113.5	209.5	129	185
06DSS17T	17	38	8.4	62	42	38	92	123	228	138	198
06DSS25T	25	45	14.26	75	50	45	106	148	271	165	227
06DSS35T	35	51	21.2	82.5	57	51	122	172	312	238	344
06DSS42.5T	42.5	57	29.01	95	63	57	143	181			
06DSS55T	55	63	38.6	104.8	68	63.5	152.4	203.2	418.8	270	419