







# LED Nova Batten Light

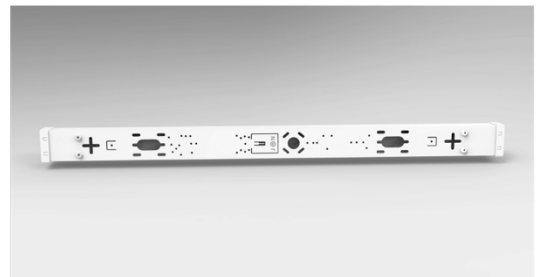

# Specifications

STANDARD			
Model No.	BT-NOVA-4FT-SD	BT-NOVA-5FT-SD	BT-NOVA-6FT-SD
Dimension(mm)	1200*65*70	1500*65*70	1800*65*70
Wattage(w)	20W/30W/40W	30W/40W/50W	40W/50W/60W
Input Voltage(v)	AC220~240V		
Light Source	SMD2835		
SDCM	<6		
CCT(K)	3000K-4000K-6500K		
Lumen (Lms/W) ± 5% @4000K	20W@2800lm 30W@3900lm 40W@4800lm	30W@4200lm 40W@5200lm 50W@6000lm	40W@5600lm 50W@6500lm 60W@7200lm
CRI	>80		
Beam Angle (°)	120°		
Dimming	Non-Dimmable		
Protection Class	Class I		
Degree of Protection (IP)	IP20		
Impact Resistance (IK)	IK08		
Material	Base	Iron	
	Heatsink	Iron	
	Diffuser	PC	
L70	54000Hrs		
Glow Wire Test (°C)	650°C		
Operation Temp. (°C)	-20~ 45°C		
Installation	Surface Mounted / Suspended		
Certifications	UKCA, CE, RoHS		
Warranty	5 Years		

SENSOR			
Model No.	BT-NOVA-4FT-MS	BT-NOVA-5FT-MS	BT-NOVA-6FT-MS
Dimension(mm)	1200*65*70	1500*65*70	1800*65*70
Wattage(w)	20W/30W/40W	30W/40W/50W	40W/50W/60W
Input Voltage(v)	AC220~240V		
Light Source	SMD2835		
SDCM	<6		
CCT(K)	3000K-4000K-6500K		
Lumen (Lms/W) ± 5% @4000K	20W@2800lm 30W@3900lm 40W@4800lm	30W@4200lm 40W@5200lm 50W@6000lm	40W@5600lm 50W@6500lm 50W@7200lm
CRI	>80		
Beam Angle (°)	120°		
Dimming	Non-Dimmable		
Sensor	Built-in		
Protection Class	Class I		
Degree of Protection (IP)	IP20		
Impact Resistance (IK)	IK08		
Material	Base	Iron	
	Heatsink	Iron	
	Diffuser	PC	

L70	54000Hrs
Glow Wire Test (°C)	650°C
Operation Temp. (°C)	-20~ 45°C
Installation	Surface Mounted / Suspended
Certifications	UKCA, CE, RoHS
Warranty	3+2 Years

SENSOR+EMERGENCY			
Model No.	BT-NOVA-4FT-MS+EMG	BT-NOVA-5FT-MS+EMG	BT-NOVA-6FT-MS+EMG
Dimension(mm)	1200*65*70	1500*65*70	1800*65*70
Wattage(w)	20W/30W/40W	30W/40W/50W	40W/50W/60W
Input Voltage(v)	AC220~240V		
Light Source	SMD2835		
SDCM	<6		
CCT(K)	3000K-4000K-6500K		
Lumen (Lms/W) ± 5% @4000K	20W@2800lm 30W@3900lm 40W@4800lm	30W@4200lm 40W@5200lm 50W@6000lm	40W@5600lm 50W@6500lm 50W@7200lm
CRI	>80		
Beam Angle (°)	120°		
Dimming	Non-Dimmable		
Sensor	Built-in		
Emergency Kit	Built-in		
Protection Class	Class I		
Degree of Protection (IP)	IP20		
Impact Resistance (IK)	IK08		
Material	Base	Iron	
	Heatsink	Iron	
	Diffuser	PC	
L70	54000Hrs		
Glow Wire Test (°C)	650°C		
Operation Temp. (°C)	-20~ 45°C		
Installation	Surface Mounted / Suspended		
Certifications	UKCA, CE, RoHS		
Warranty	3+2 Years		

## Applications

- Warehouses
- Supermarkets
- Shopping Malls
- Office Buildings
- Workshops
- Car Parks