


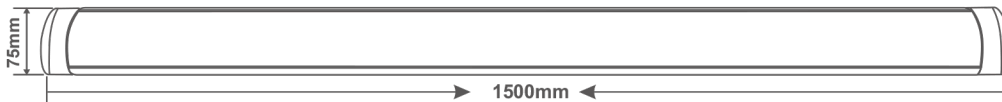



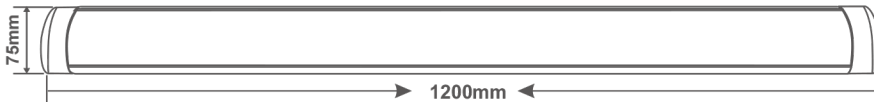

LED Slimline Batten Light

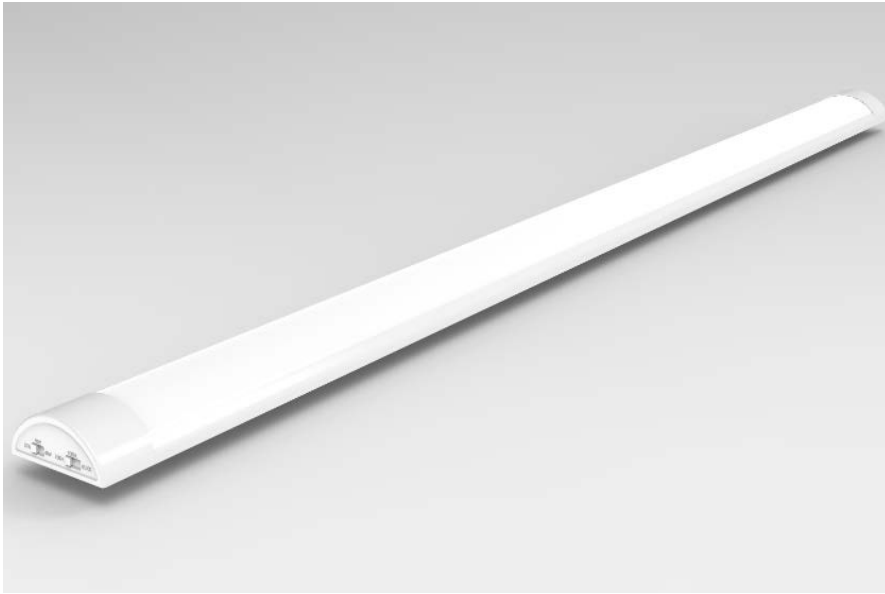

Applications

- Warehouses
- Supermarkets
- Shopping Malls
- Office Buildings
- Workshops
- Car Parks

Specifications

Model No.	BT-SLIM-4FT-SD	BT-SLIM-5FT-SD
Dimension(mm)	1200*75*26	1500*75*26
Wattage(w)	20W/30W/40W	30W/40W/50W
Input Voltage(v)	AC220~240V	
Light Source	SMD2835	
SDCM	<6	
CCT(K)	3000K-4000K-5000K-6500K	
Lumen (Lms/W) ± 5%	120Lms/W	
CRI	>80	
Beam Angle (°)	120°	
Dimming	Non-Dimmable	
Protection Class	Class I	
Degree of Protection (IP)	IP40	
Impact Resistance (IK)	IK08	
Material	Heatsink	Aluminium
	Diffuser	PC
L70	>54000Hrs	
Glow Wire Test (°C)	650°C	
Operation Temp. (°C)	-20~ 45°C	
Installation	Surface Mounted / Suspended	
Certifications	UKCA, CE, RoHS	
Warranty	5 Years	