





LED Slimline Batten Installation Instructions

Surface Mount


1. Drill 2 holes in the ceiling.
Gently insert the provided plastic expansion tubes provided into the pre-drilled holes, ensuring the plastic tubes are flush with the mounting surface.



2. Align and fix the mounting clips to the pre-drilled holes using the screws provided.



4. Clip the Slim LED Batten onto the mounted clips.
Note: Ensure the installation is correct before switching on the fitting to test.




3. Wiring.




Suspension


1. Insert the wires into the clips and adjust the length.




2. Insert the wires into the screw nuts.





3. Drill holes in the ceiling and screw in the mounting sockets.



4. Screw the nuts into the mounting sockets.




5. Clip the Slim LED Batten onto the clips.

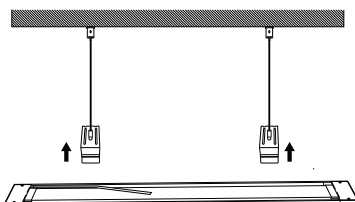


Specification:

Model No.	BT-SLIM-4FT-SD	BT-SLIM-5FT-SD
Dimension(mm)	1200*75*26	1500*75*26
Wattage(w)	20W/30W/40W	30W/40W/50W
Input Voltage(v)	AC220~240V	
Light Source	SMD2835	
SDCM	<6	
CCT(K)	3000K-4000K-5000K-6500K	
Lumen (Lms/W) ± 5%	120Lms/W	
CRI	>80	
Beam Angle (°)	120°	
Dimming	Non-Dimmable	
Protection Class	Class I	
Degree of Protection (IP)	IP40	
Impact Resistance (IK)	IK08	
Material	Heatsink	Aluminium
	Diffuser	PC
L70	>54000Hrs	
Glow Wire Test (°C)	650°C	
Operation Temp. (°C)	-20~ 45°C	
Installation	Surface Mounted / Suspended	
Certifications	UKCA, CE, RoHS	
Warranty	5 Years	

Dimension:

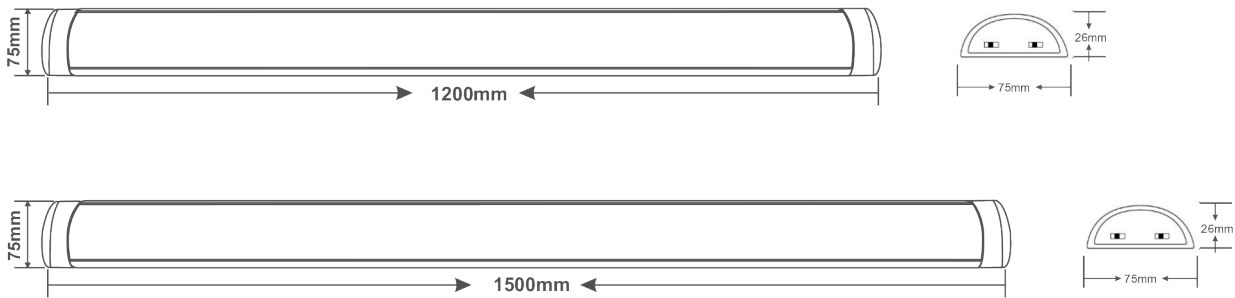

3 Powers & 4CCT:

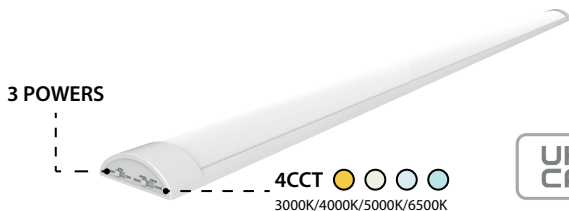

Applications:

- Warehouses
- Supermarkets
- Shopping Malls
- Office Buildings
- Workshops
- Car Parks