

NATIONAL-SPENCER, INC.

ZEE LINE LUBRICATION EQUIPMENT


Phone 800-231-1525

Fax 800-637-9511

Web Address www.zeeline.com

Part # 942

12 Volt Fuel Transfer

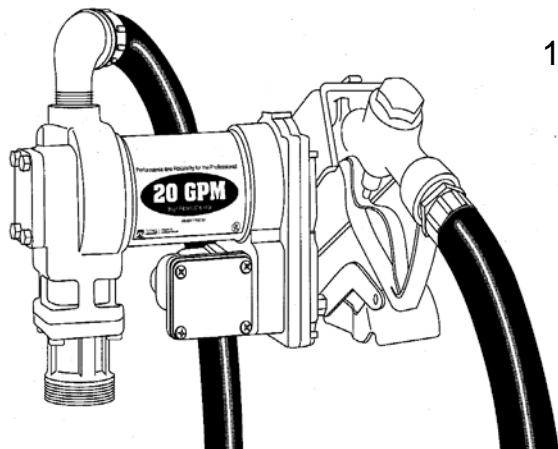

Pumps gasoline or diesel from bulk tanks to cars, trucks or other equipment



12 Volt DC High Flow Pump

Features

Construction - pump housing	Cast iron
Explosion-proof motor with 2 sealed ball bearings	1/4 HP
Amp draw from battery	22 Amp
Maximum flow rate with factory provided hose and nozzle	20 GPM (76 LPM)
Thermal overload protection	Yes
Rotor composition	Iron
Internal bypass valve	Yes
Built-in strainer	Yes
Inlet	1" NPT
Outlet	1" NPT
Threaded tank adapter	2" NPT
Motor approvals	U/L, cU/L, CE
Built-in check valve	Yes
Pump may be padlocked	Yes
Nozzle hanger	Yes
Machined carbon vanes	Yes
Duty cycle	30 minutes on, 30 minutes off

Available options

Automatic nozzle	Yes
------------------	-----

Number of boxes and contents – 1 box (18" x 18" x 11") (33 lb.) containing the following items:

Telescoping steel suction pipe – 1" NPT	Yes
U/L hose with static wire	1" x 12' (3.7m)
Nozzle	1" manual
15' (4.6m) 3-wire power cable	Yes

Recommended for

Diesel fuel, gasoline, kerosene, mineral spirits, Stoddard Solvent and Heptane.	Not to be used with fluids with a flash point of 100°F or less
---	--

Applications

For pumping fuel from portable storage tanks on job sites or from truck mounted tanks
