

Sand Blasted Nickel Plated Brass Ball Valves Series-4902

In-line ball valves, 4902 series



This range of ball valves is suitable for many industrial applications, when the fluid carried and working temperatures require PTFE seals. The range is available in following versions.

H. R. Range

Models 4902



- Excellent resistance to high pressure and temperature constraints
- full flow fluid passage
- silicone free in order to meet specific application requirements
- e. g. automotive process industry
- both high quality and good value.

Specifications

Fluids : compressed air, gas, water stream, oil and all fluids suitable with constituent materials


Working temperature : - 20° to + 130°C

Working pressure : 25 to 30 bar, depending on the model


Materials :

- **body :** sand blasted nickel-plated brass
- **ball :** nickel-plated chromed brass
- **handle :** blue plastic coated steel
- **ball seals :** PTFE
- **stem seals :** PTFE

4902 double female, BSP parallel

C	DN	PN	L	E	F	H	L	M	
G1/4	10	30	4902 10 13 23	11	20	43	51,5	98	0.140
G 3/8	10	30	4902 10 17 23	11,4	20	43	51,5	98	0.152
G 1/2	15	30	4902 15 21 23	13,5	25	47	55	98	0.181
G 3/4	20	30	4902 20 27 23	12,5	31	58	57,5	122	0.312
G 1"	25	30	4902 25 34 23	15	38	60	69,5	122	0.472
G 1 ⁿ / ₄	32	25	4902 32 42 23	17	48	77	81,5	153	0.700
G 1 ⁿ / ₂	40	25	4902 40 49 23	18	54	83	95	153	0.934
G 2"	50	25	4902 50 48 23	22	6	95	113	162	1.525
G 2 ⁿ / ₂	65	30	4902 65 47 23	22	85	132	136	255	2.458
G 3"	80	30	4902 80 46 23	25	99	140	157	255	3.531
G 4"	100	30	4902 01 45 23	29	125	154	191	255	10.655

Legris offers a wide range of ball valves suitable for many applications You will find details of all models on www.parker.com

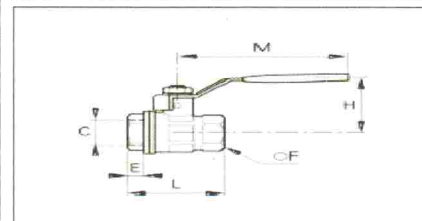

LEGRIS INDIA PRIVATE LIMITED

Legris House, 99, Pace City-1, Sector 37 Gurgaon - 122001 Haryana, INDIA

Tel. : +91 124 4590600 Fax : +91 11 66173900

E-mail : legris.india@parker.com

www.transair.legris.com | www.parkerlegris.com