
#### STANDARD FEATURES



### ISLAND HOODS

- Unique CircuFlow Ventilation System<sup>TM</sup> with centrifugal blower design prevents grease and contaminants from collecting in ductwork for safe operation.
- Appropriate CFM specifications to perfectly match any Hestan cooking product (see specification recommendations) for optimized fume and grease extraction.






Removable blower Housing

- Baffle-less, variable speed blower CircuFlow Ventilation System<sup>TM</sup> collects 70% more grease than most competing models.
- Ultra-quiet CircuFlow Ventilation SystemTM provides best-in-class air flow and extraction efficiency.



- Removable blower components are dishwashersafe for easy cleaning.
- Optimized low-temp LED lighting for optimum illumination.



- Marquise Accented<sup>™</sup> front and back face profile compliments design integrity.
- Available in 36", 42", 54" widths.

LED lighting






### **OPTIONS & ACCESSORIES**

X

- Available in Twelve (12) Hestan signature color finishes.
- Duct Covers in (12) colors.

## 36" and 42" Hood


# 54" Hood





HOLES)


15,00


-.39 X .56 OBROUND (10 PLCS.)



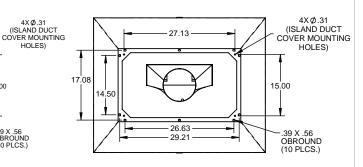

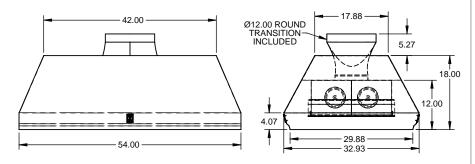


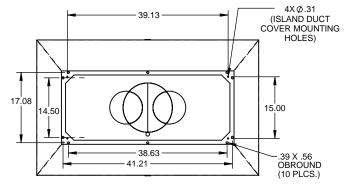




20.63

17.08







ALL Models	Description	Width Dimensions X (in.)	Recommended for Rangetop Size	CFM SP@o.o"	Equivalent CFM**	Volts	Amps	Hz	RPM	Sones	# Lights	Approx SHP WT (lbs)
KVI36	36" Island Hood	35.88	30″	550	900	120	4.0	60	1550	6.0	4	125
KVI42	42" Island Hood	41.88	36"	550	900	120	4.0	60	1550	6.0	4	140
KVI54	54" Island Hood	53.88	48"	1100	1800	120	7.5	60	1550	6.4	6	185

<sup>\*\*</sup>When comparing the Hestan system with blower units made by other manufacturers, use the "Equivalent CFM"

Hestan Indoor products are approved for indoor use only. Hestan Commercial Corporation reserves the right to change materials and specifications without notice.