Majestic II - UAM76 30" Wall Mount Range Hood





Key Features

- 4 ventilating speeds.
- 600 CFM ventilation effectively removes odors and
- Halogen Lights illuminate the cooktop.
- Anti-grease filters in anodized aluminum are dishwasher


Emerald Burgundy Glossy Graphite Stainless Green Black Matte Steel

Option

General Information

Materials	
Exhaust Method	Convertible
Exhaust Vent Location	
Duct Shape	
Round Duct Diameter	5 14/16"/ 15 CM
Adjustable Height	Yes
Filter Type	Mesh
Washable Filter	Yes
Dishwasher Safe Filter	Yes
Filter Material	Aluminum
Speed Control	Yes
Number of Speeds	4-Speed
Speed Control Type	Push Button
Minimum Sones	3
Maximum Sones	14
Maximum Sound Level	66 db
Infrared Lights	1
Required Bulb Wattage	20 Watt
Blower Type	
Maximum Air Movement	600 CFM
Delay Shut-off	Yes
Filter Clean Reminder	Yes
Power Source	Plug-In
Voltage	120 Volts
Amperage	15 AMPS
Hertz	60 Hz



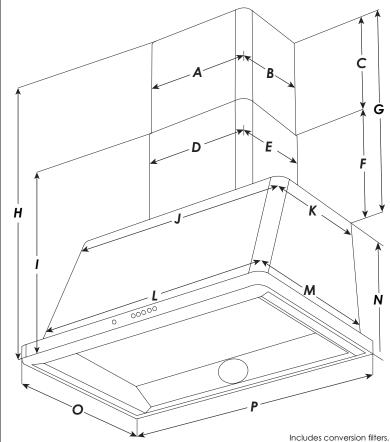

Duct and vent cup are not included. Customers must provide their own duct and vent

Specifications

Point	Description	cription Measu	
		Inch	СМ
Α	Duct Extension Width	16	40.64
В	Duct Extension Depth	11	27.94
С	Duct Extension Height	14 12/16	37.46
D	Duct Width	15 12/16	40.01
E	Duct Depth	11 7/16	29.05
F	Duct Minimum Height	14 ^{9/16}	36.99
G	Duct Maximum Height	29 5/16	74.45
Н	Maximum Overall Height	4610/16	118.43
I	Minimum Overall Height	32 3/16	81.76
J	Upper Chimney Width	2410/16	62.55
K	Upper Chimney Depth	15 4/16	38.74
L	Lower Chimney Width	26 6/16	66.99
M	Lower Chimney Depth	22	55.88
N	Hood Height with Sleeve	17 5/16	43.97
0	Overall Depth	2310/16	60.01
Р	Overall Width	2914/16	75.88