Majestic II - UAM90 36" Wall Mount Range Hood




Key Features

- 4 ventilating speeds.
- 600 CFM ventilation effectively removes odors and
- Halogen Lights illuminate the cooktop.
- Anti-grease filters in anodized aluminum are dishwasher

General Information

als Stainless St	
t MethodDuc	ted
t Vent Location	
hape 	
Duct Diameter	
able Height	
/pe M	
ble Filter	
sher Safe Filter	
laterial	
Control	
er of Speeds .4-Spe	
Control TypePush But	
um Sones.	
um Sones	
um Sound Level	
d Lights	
hts	
Type	
um Air Movement 600 C	
Shut-off	
lean Reminder.	
SourcePlug	
e	_
age	
	,



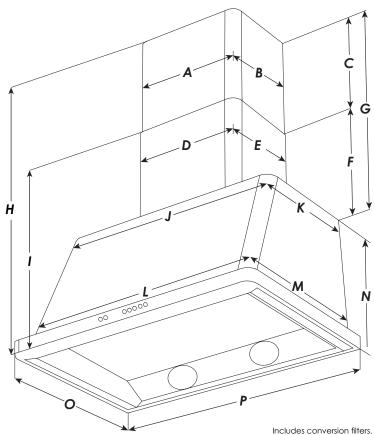

Duct and vent cup are not included. Customers must provide their own duct and vent

Specifications

Point	Description	Measurement	
		Inch	СМ
Α	Duct Extension Width	16	40.64
В	Duct Extension Depth	11	27.94
С	Duct Extension Height	14 12/16	37.46
D	Duct Width	15 12/16	40.01
E	Duct Depth	11 7/16	29.05
F	Duct Minimum Height	14 9/16	36.99
G	Duct Maximum Height	29 5/16	74.45
Н	Maximum Overall Height	4610/16	118.43
I	Minimum Overall Height	32 3/16	81.76
J	Upper Chimney Width	30 10/16	77.79
K	Upper Chimney Depth	15 4/16	38.74
L	Lower Chimney Width	32 6/16	81.60
M	Lower Chimney Depth	22	55.88
N	Hood Height with Sleeve	17 5/16	43.97
0	Overall Depth	23 10/16	60.01
Р	Overall Width	35 4/16	89.54