



## Moby Rain Barrel® Installation Instructions


Read and understand all the instructions before attempting to install your rain barrel. Once properly set up, you will be able to enjoy your rain barrel for many years to come. Locate a downspout where you wish to collect rainwater. It is very important the rain barrel be installed on a secure, level base, we recommend using cement blocks. When the barrel is full it weighs over 500 pounds.

### What's included:

- Screen (A)
- Screen Ring (B)
- Teflon Tape (C)
- Non Potable Tag (D)
- Overflow Hose (E)
- Stainless Steel Screws (F)
- Brass Spigot (G)
- Kink Free Spigot (H)
- Releasable Zip Ties (I)
- Overflow Cap (J)

### Additional Parts & Tools Needed

- Gloves & safety glasses
- Blocks
- Hack saw
- Tape measure
- Marker
- Screw driver
- Downspout elbow

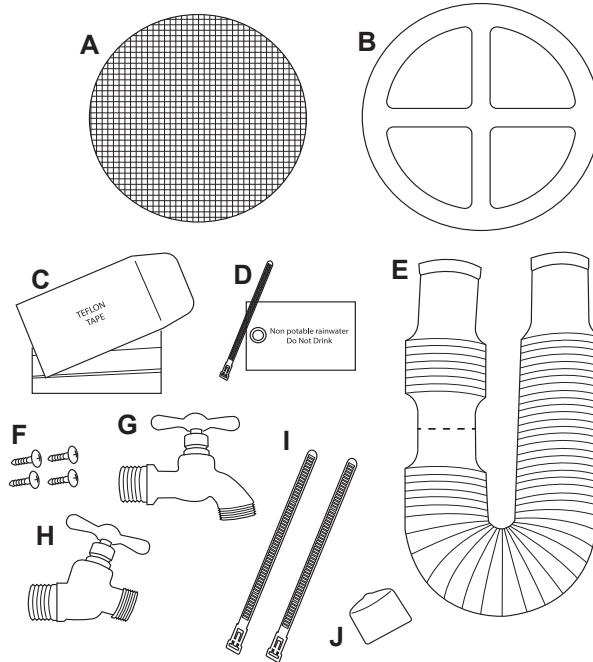

**Warranty:** The Moby Rain Barrel® is warranted for two years from date of retail purchase against defects in material and workmanship, and is solely for the benefit of the original consumer purchaser. (Retain your dated sales receipt as proof of purchase).

**COVERED:** Replacement of defective parts and freight (Standard Ground) to cover product return and delivery. **NOT COVERED:** Damages caused by negligence, abuse, failure to perform normal maintenance, failure to properly winterize or failure to adhere to product instructions for use. Any other expense involving this product. This Warranty shall not apply to any defect, malfunction or failure to conform with the Warranty provisions if caused by damage (not resulting from defect or malfunction) due to unreasonable use or accidental occurrence involving the Purchaser. This includes CONSEQUENTIAL DAMAGES, INCIDENTAL DAMAGES OR INCIDENTAL EXPENSES, INCLUDING DAMAGE TO PROPERTY and INJURY TO PERSONS. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU. This Warranty gives you specific legal rights, which may vary from state to state.

### Request For Warranty Action:

Please direct requests for action on this warranty or any other product inquiries to [info@rainwatersolutions.com](mailto:info@rainwatersolutions.com) include proof of purchase, narrative description of issue, photo of area described along with your name, address, and phone number. Rain Water Solutions will assess the issue and process your claim in a timely manner.

**Rain Water Solutions**  
5809 Trinity Rd.  
Raleigh, NC 27607  
919.835.1699  
[www.RainWaterSolutions.com](http://www.RainWaterSolutions.com)



### Step 1: Assemble the Barrel

Wrap the threads of the spigots (G & H) with teflon tape (C) — put only two layers of teflon tape on the threads. Install the brass spigot (G) on the upper port, and the kink free spigot (H) on the bottom port. **DO NOT OVER TIGHTEN** — this will result in stripping the threads and your barrel will leak. Attach the non potable tag (D) to your spigot for safety. Place the overflow hose (E) on the overflow port that will allow the best drainage. Place the overflow cap (J) on the second overflow port to prevent insects from entering the barrel.

### Step 2: Assemble the Lid


Place lid on top of the barrel and line up holes in the lid with the holes in the barrel. Tighten releasable zip ties (I) through holes until snug for safety. Place the screen (A) over recessed inlet on lid, place screen ring (B) on top of screen. Install the ring with the thickest lip facing up and indented holes facing down. Screw the four screws into the ring until it attaches through screening and into lid. You will need to keep the inlet holes clear so debris does not collect and prevent water from entering the barrel.

### Step 3: Choose a Location

Choose convenient downspout location. It is recommended to elevate rain barrel using solid blocks and install on sturdy, level ground. Base needs to extend past base of barrel.

### Step 4: Shorten Your Downspout

Measure blocks and assembled rain barrel, allow room for gutter elbow (K)\* and mark the cut. **WARNING:** Cold climates be aware that heated downspouts may cause electrical shock. Call a professional before installing. Wearing safety glasses and gloves use a hack saw to cut downspout.

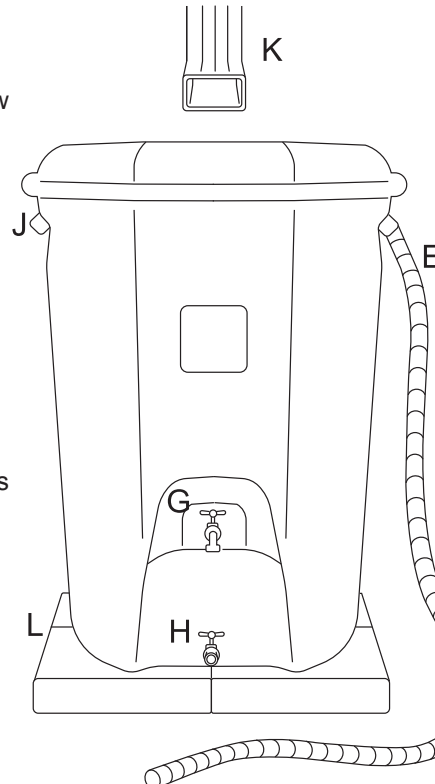

### Step 5: Final Step

Place assembled rain barrel on blocks (L)\* and attach gutter elbow to direct rain water into screened inlet of lid. You are now ready to start collecting and using your rainwater! This water is **NON-POTABLE** and should never be consumed.

**Linking rain barrels:** The overflow hose has a small section that can be cut using scissors or utility knife and used to link multiple rain barrels by attaching overflow section between 2 overflow ports. Please visit [RainWaterSolutions.com](http://RainWaterSolutions.com) to view more set up options.

**Maintenance:** Keep screen clear of debris. In areas that have large pollen counts, the rain barrel may develop a smell after pollen season. If this happens, drain the barrel and use soft bristle brush to clean out the barrel. Once a year completely drain the barrel and remove any accumulated organic matter.

**Winterize:** Drain, disconnect and store in a dry area. *Moby is not warranted for damage from freezing*