




# BA45-005

NISSAN PATROL GQ/GU (Y60/Y61)  
TOYOTA LANDCRUISER 80/105

1. REMOVE THE ORIGINAL BOLTS AND BRACKET
2. SEE DIAGRAM BELOW AND FIND THE BEST COMBINATION OF HOLES THAT SUITS THE LIFT FITTED TO THE VEHICLE. IT IS RECOMMENDED IF UNSURE TO GO SLIGHTLY LESS THAN THE LIFT PROVIDED (I.E. IF THE VEHICLE IS LIFTED 5.5" USE THE 5" HOLES, AS USING LONGER HOLES THAN THE LIFT PROVIDED MAY PROVIDE TOO GREATER REAR BRAKING BIAS AND INTURN CAUSE UNSTABLE BRAKING PERFORMANCE. IF UNSURE ON THE LIFT FITTED TO THE VEHICLE CONTACT YOUR NEAREST DOBINSONS DEALER.
3. BOLT THE BRACKET TO THE VEHICLE AND TO THE BRAKE BIAS PLATE. IT IS IMPORTANT TO CHECK THAT THERE IS SUFFICIENT CLEARANCE AT THE TOP OF THE BRACKET WHEN FITTING TO THE VEHICLE. THE OVERHANG SHOULD BE POSITIONED ON THE BOTTOM SIDE SO IT IS NOT PROTRUDING PAST THE TOP AND IF REQUIRED THE OVERHANG CAN BE CUT OFF.

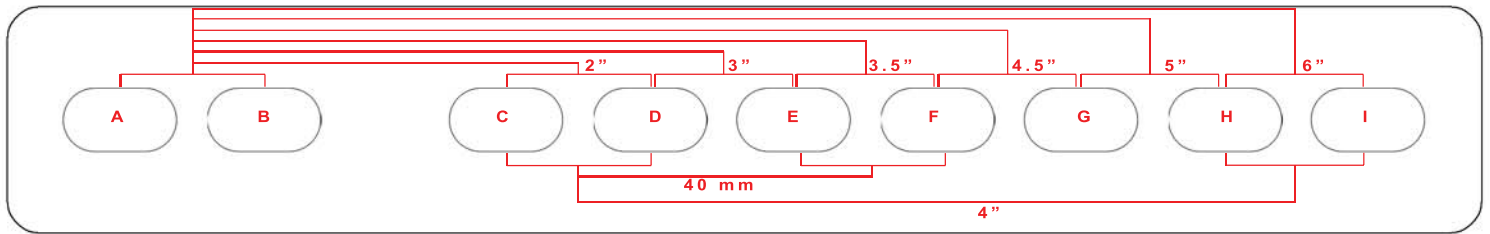

# BA45-005

NISSAN PATROL GQ/GU (Y60/Y61)  
TOYOTA LANDCRUISER 80/105

1. REMOVE THE ORIGINAL BOLTS AND BRACKET
2. SEE DIAGRAM BELOW AND FIND THE BEST COMBINATION OF HOLES THAT SUITS THE LIFT FITTED TO THE VEHICLE. IT IS RECOMMENDED IF UNSURE TO GO SLIGHTLY LESS THAN THE LIFT PROVIDED (I.E. IF THE VEHICLE IS LIFTED 5.5" USE THE 5" HOLES, AS USING LONGER HOLES THAN THE LIFT PROVIDED MAY PROVIDE TOO GREATER REAR BRAKING BIAS AND INTURN CAUSE UNSTABLE BRAKING PERFORMANCE. IF UNSURE ON THE LIFT FITTED TO THE VEHICLE CONTACT YOUR NEAREST DOBINSONS DEALER.
3. BOLT THE BRACKET TO THE VEHICLE AND TO THE BRAKE BIAS PLATE. IT IS IMPORTANT TO CHECK THAT THERE IS SUFFICIENT CLEARANCE AT THE TOP OF THE BRACKET WHEN FITTING TO THE VEHICLE. THE OVERHANG SHOULD BE POSITIONED ON THE BOTTOM SIDE SO IT IS NOT PROTRUDING PAST THE TOP AND IF REQUIRED THE OVERHANG CAN BE CUT OFF.

