

Description

Grate Seal One Way Valve

GS01

Grate Seal One Way Valve 100mm / 80mm

Product Information



Product Standards and Certifications



WaterMark

WMTS-522

Certificate No. 23444

Product Code	GS01
Material	EPDM Rubber
Flow Rate	45L/min
Standards	WMTS-522:2021

Grate Seal® is a one way valve specifically designed for installation into floor and shower waste outlets to prevent the passage of airborne viruses, offensive sewer odours, insects and soap suds from making their way out of the sewage system into living zones. Its unique flexible, one-piece design allows for easy retrofit installation into the riser pipe, allowing water to drain freely from fixtures such as showers, whilst creating a barrier between the sewer and the habitable area.

Product Features



Stops odours and airborne viruses escaping from the sewage system



Stops insects entering the home via grates



Stops suds rising through floor grates



Permanent, cost effective solution




Install and uninstall in minutes

- Suits 100mm outlets
- Can be easily trimmed to fit 80mm pipes
- Self cleansing design
- Easy retrofit installation
- No alterations to existing outlets
- No tools required
- Stops insects, odours, suds & airborne viruses
- WaterMark: 23444


Additional Information

GS01 for 100mm outlets

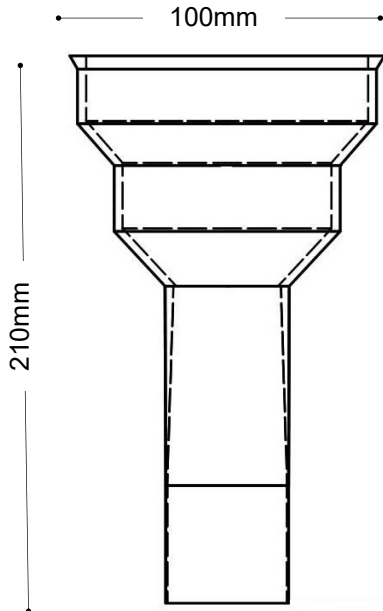

All measurements are in millimetres and are to be used as a guide only


GS01 for 80mm outlets

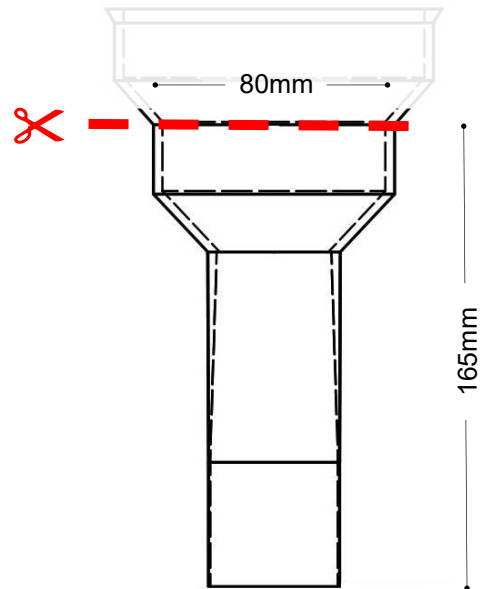

Trimming should be carried out with sharp scissors at the 80mm cut line indicated above.

Installation

Installation Instructions

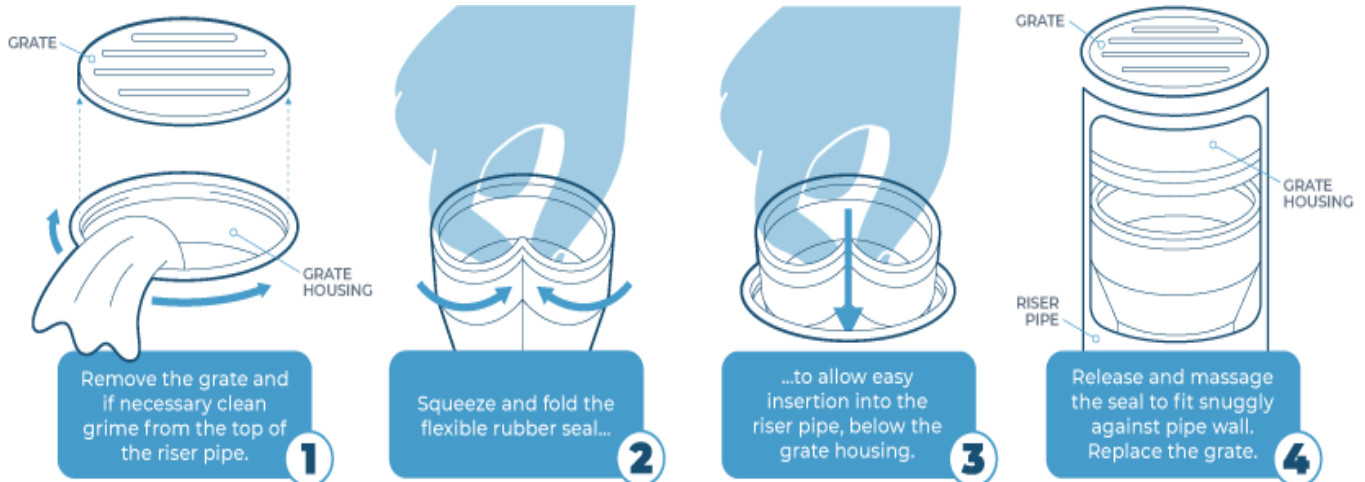

Note: A) This barrier type sealing device is not for use as an alternative to a water trap seal. B) The product should not be removed from the packaging until it is to be installed. C) The product shall not be installed into an overflow relief gully (ORG), or a puddle flange. D) Install clear of the following potential obstructions: (i) an existing water level within a trap, (ii) any inlets to a riser, and (iii) any above ground soil, waste and drainage pipe collars. E) Product warranty details including contact details for warranty claims are available from the contact information below. F) Installation to be undertaken by a licensed practitioner or competent person. G) Do not allow the Grate Seal products to come into contact with harsh or abrasive chemicals or cleaning agents as this may affect the integrity and the lifespan of the rubber compound. H) Warranty period is 1 year for defective products only. General wear and tear or misuse of product will not be covered under warranty.