


hollis+morris

anchor pendant duo

product installation + specifications

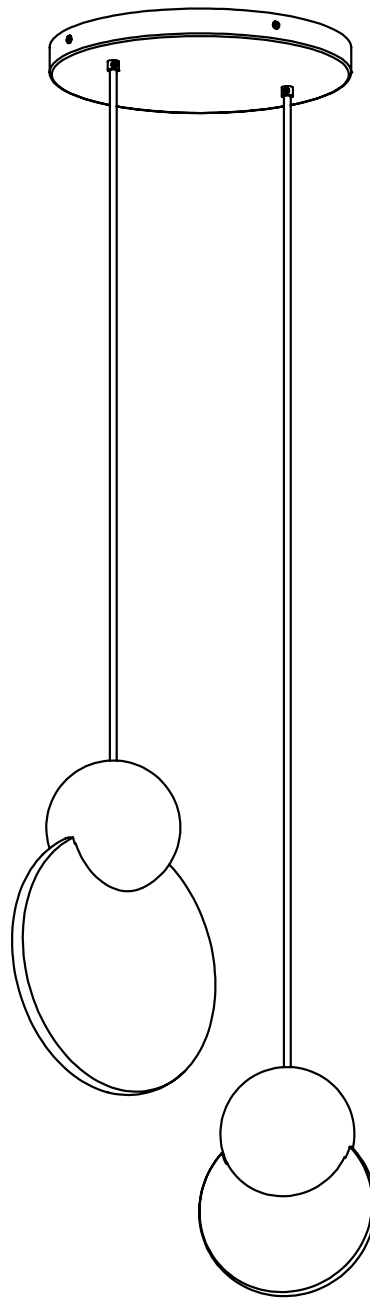

anchor pendant

product code:

ACHRpendant

materials:

- + solid wood
- + frosted acrylic
- + 24V LED extrusion
- + fabric covered power cord

finish:

- + hardwax oil

input:

- + 120V 50/60 Hz (Canada + US)

driver:


- + 24V phase dimmable driver
- + driver included with canopy
- + 277 VAC- 0-10V dimmable driver available upon request

output:

- + 4W
- + 400 lumens (frosted)
- + 266 lumens (clear)
- + 3000K with CRI of 95 or higher

suspension:

- + cord length: 10' standard (custom lengths available)
- + 1-point suspension
- + single canopy connection

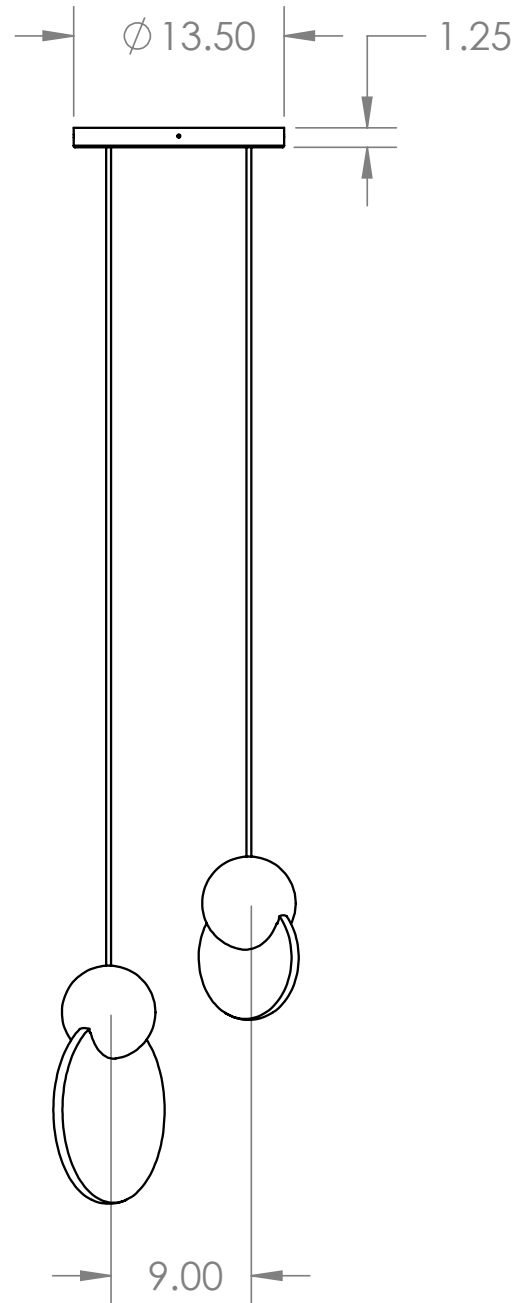


certification:



dimensions + installation

CANOPY CONNECTION

1. Locate desired canopy location on ceiling.
2. Connect fabric covered suspension cable from fixture to the cable gripper on the canopy.
3. Have a certified electrician connect +/- leads of suspension cable to the supplied driver and said driver to 120 V domestic power.
4. Secure all connections.
5. Adjust all cables to desired heights (standard x length max. = 120")

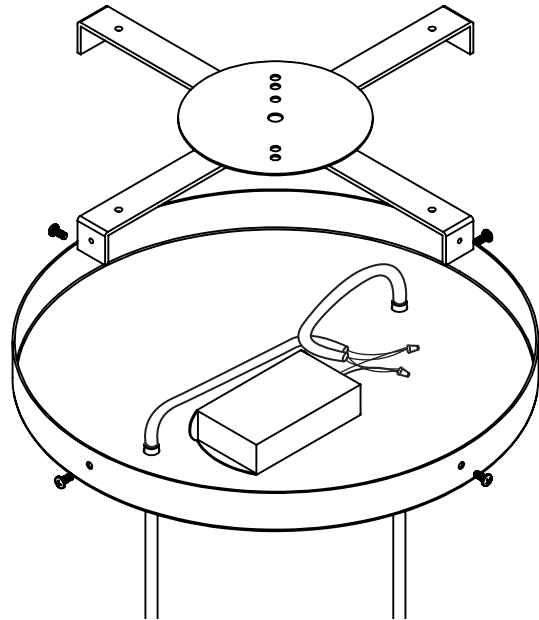

CANOPY DIMENSIONS

