

2019-2025 RAM 2500-4500 GRILLE INSTALL.



REMOVE TOP COVER TO ACCESS THE TOP 10MM BOLTS.

REMOVE THE TOP GRILLE TRIM PANEL



REMOVE THE TRIM PIECE BELOW THE HEADLIGHT TO ACCESS THE BOLT FOR THE LOWER GRILLE TRIM.


USE CAUTION TAPE THE FENDER TO PROTECT THE PAINT FINISH.

(SEE IMAGES ON THE LEFT)

REMOVE ALL THE 10MM BOLTS HOLDING THE GRILLE/ SHUTTER TO THE TRUCK.

PLACE GRILLE AND SHUTTER FACE DOWN ONTO A PADDED SURFAEC.

REMOVE GRILLE FROM SHUTTER SUPPORT.

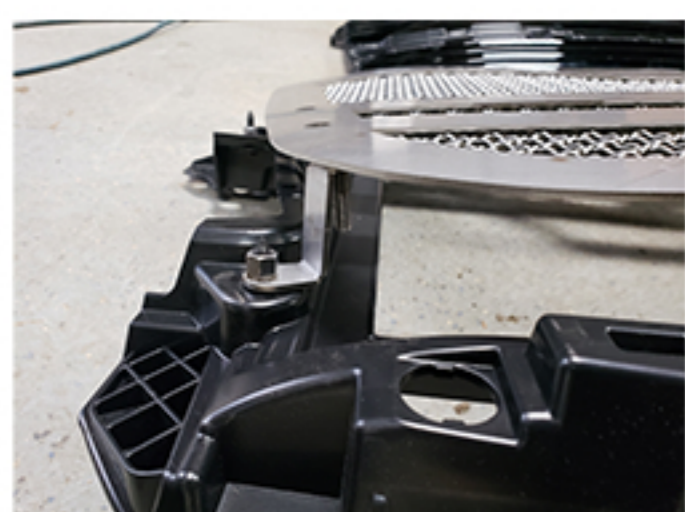

BOLT THE OVERKILLFAB GRILLE TO THE GRILLE SHUTTER SUPPORT.
(SEE TOP IMAGES ON LEFT)

USE THE GRILLE TRIM PIECES TO CENTER/ALIGN THE OVERKILLFAB GRILLE.
(SEE BOTTOM IMAGES ON LEFT)



INSTALL GRILLE SHUTTER/SUPPORT TO THE TRUCK, REVERSE EARLIER STEPS.

CHECK HEADLIGHT GAPS.

REINSTALL GRILLE TRIM PIECES.

IF YOU'RE TRUCK HAS THE FRONT FACING CAMERA INSTALL THAT BEFORE INSTALLING THE GRILLE ONTO THE TRUCK.

