

ecomaxTM
by **HOBART**

DISHWASHER
F504



 made in germany

ECOMAX F504 DISHWASHER

With a high capacity of up to 60 racks per hour, this dishwasher is a reliable partner for club houses, bistros, and fast-food restaurants. The practical floor unit fits under every work counter.

Dishwasher ecomax F504

Cycle times*	60 / 150 sec.
Capacity per hour*	up to 60 racks
Wash/rinse temperature	approx 60° C / approx 82°C
Tank capacity	25 l
Fresh water consumption/rack	2.3 l
Wash pump	0.34 kW
Heating booster/tank	1.9 kW / 1.8 kW
Total loading	2.4 kW
Rated voltage	(240 / 50/1)-15A
Width/Depth/Height	576/604/820 mm
Loading height	360 mm
Rack size	500 x 500 mm


hot water connection

PRODUCT ADVANTAGES

- Electronic control with digital temperature indication
- Flat surface of control panel
- 2 selectable wash cycles
- Rotating top and bottom wash system to distribute the wash water evenly over the dishes
- Indented nozzles prevent blocking
- Thermostop-function for guaranteed rinse temperatures
- Integrated self-cleaning cycle
- Removal of rinse arms without any tools
- Easy access to all parts
- Deep drawn rack track
- Door safety lock
- Double-walled insulated front door
- Tank strainer reduces soiling of the tank water
- Integrated cycle counting, e.g. for control of water treatment system
- USB connect for easier service access

STANDARD EQUIPMENT

- Watermark Approved
- Plate rack P-18-12
- Cutlery basket CB1
- Rinse aid and detergent dispenser
- Heater with thermostat control
- Electric cable, flexible water supply hose and drain hose
- Rear panelling

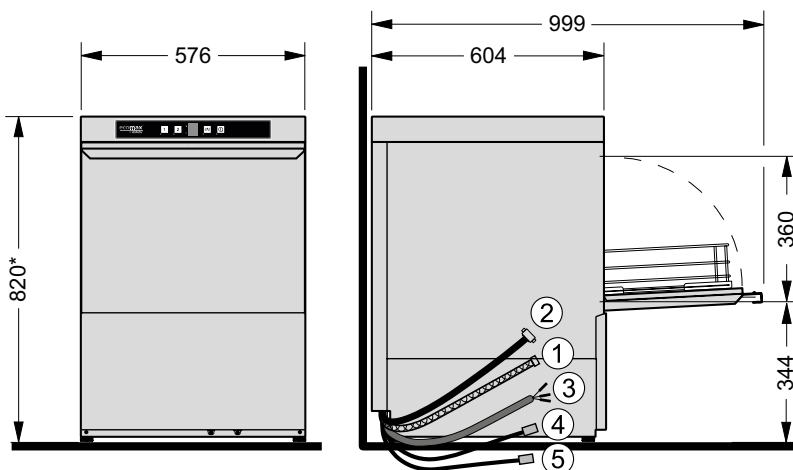

* + 40 mm adjustable feet

CONNECTIONS

① Drain hose	2,000 mm ID20/ OD25
② Supply hose	2,000 mm R 3/4"
Flow pressure	3.0 -6 bar (300- 600 kPa)
Max. supply water temperature	60°C
Required flow rate	5 l/min
③ Power cord	2,000 mm
Supply hose for	
④ Detergent	2,500 mm
⑤ Rinse aid	2,500 mm