



HOSHIZAKI

KM-80C-HC

Crescent Ice Maker - Self-Contained



NATURAL REFRIGERANT

Model Number: 91000149

PRODUCT FEATURES


- Individually shaped crescent ice.
- Protected by HoshiGuard Antimicrobial Agent.
- CycleSaver® technology includes a double-sided evaporator, uniquely crafted in stainless steel, which produces ice on both sides, resulting in more ice in less amount of time.
- EverCheck™ Control Board with audible alarm and diagnostic features, designed to assist service technicians in diagnosing problems.
- Accessible digital operation panel allows for easy identification of operation status and cause of faults.
- Automated Cleaning function makes cleaning simple and saves time.
- Durable stainless steel exterior.
- Easily removable & cleanable air filters on front panel.
- Accessories : Manual, Scoop, check valve and 150mm adjustable legs included (water filter and optional hex bolt legs sold separately)



PRODUCT SPECIFICATION

| | |
|-----------------------------|---|
| Production Capacity / 24hrs | Approx. 68kg @ 21°C Air temp; 15°C Water Approx. 55kg @ 32°C Air temp; 21°C Water |
| Bin Storage Capacity | Approx. 34kg (Bin Control Setting Approx. 29kg) |
| Freeze Cycle Time | Approx. 23 Min (At. 21°C Air ; 15°C Water) |
| Ice Production / cycle | Approx. 1.15kg/130pcs |
| Dimensions | 605mm (W) x 712mm (D) x 838mm (H) (982-1005mm [H] with 150mm adjustable legs) (842mm [H] with optional hex bolt leg |
| Cooling | Air |
| Weight Net/Gross (kg) | 50/63 |
| AC Supply Voltage | 1 PHASE 220-240V 50Hz / 10amp Plug |
| Amperage | Running: 2.1A |
| Refrigerant Charge | R290/147g |
| Operating Conditions: | |
| Ambient Temp. | 7-38°C |
| Water Supply Temp. | 7-32°C |
| Water Supply Pressure | 0.07-0.8MPa (0.7- 8bar) |
| Voltage Range | ±6% |
| Electrical consumption | 12.4kWh per 100kg ice (AT. 32°C; WT 21°C) |
| Water Consumption / 24hrs | Approx. 0.15m ³ /d (AT. 32°C ; WT 21°C) |
| Compatible Water Filter | HLF10 Filter System (sold separately) |

TECHNICAL DRAWING

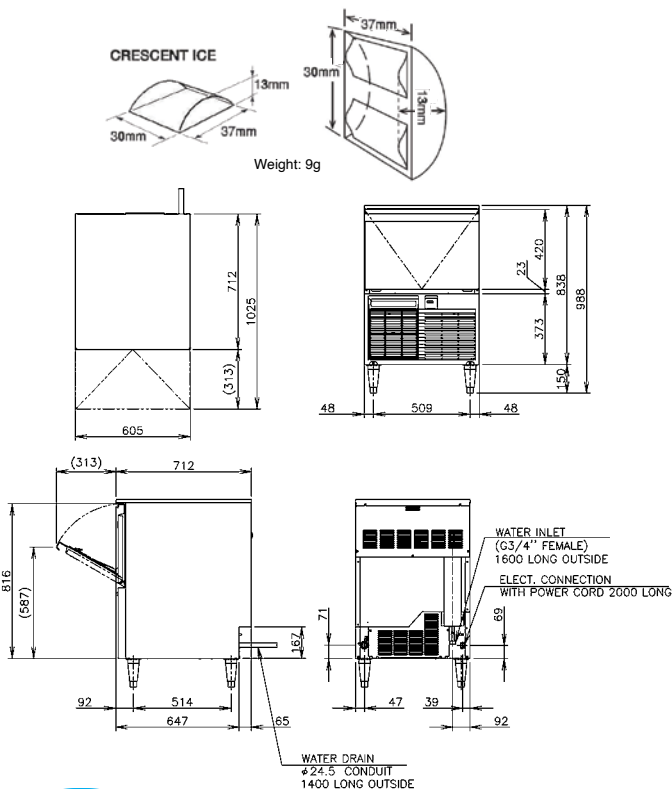

For free 6 month extended warranty, register online within 4 weeks of purchase date.

hoshizaki.com.au

INSTALLATION REQUIREMENTS

- Qualified plumber required for installation.
- Allow 15cm clearance at rear, sides and top for proper air circulation and ease of maintenance.
- Hoshizaki recommends the use of a compatible water filter to prevent non-warrantable scale & sediment complications.

*Refer to manual for full installation & maintenance requirements.

