




Product Information:

- **Symbiotic Steam (patented)** innovative, heavy duty, highly efficient, dual boiler generation and steam injection oven
- **Steam Tuner (patented)** exclusive feature allows actual tuning of saturated steam
- **Meteo System (patented)** for precise control and saturation levels
- Automatic descaling system for oven and boiler
- Integrated recirculating cleaning via tablet, with liquid detergent dispenser installed if preferred
- Large 9" innovative touch screen interface
- Over 120 pre-set cooking programs, 1,000+ additional programs - 9 phase memory available
- Automatic, adaptive cooking, rack control, regeneration, sous vide and smoking programs
- Easy Service function, Recipe tuner, and Chef's note software all as standard
- 6-speed inverter controlled fan for increased precision, control and reliability
- LED lighting for superior cavity illumination
- USB connection, HACCP
- Supplied with integrated hand shower, multi-point core temperature probe, drain kit and advanced scale reduction filter
- Left hand hinge door option available, this variation is 30mm wider and is made to order
- All combi ovens are supplied with either Standard or Reverse Osmosis Filtration system
- Optional riser stand
- 48-month warranty (Terms and conditions apply)

General Drawing:

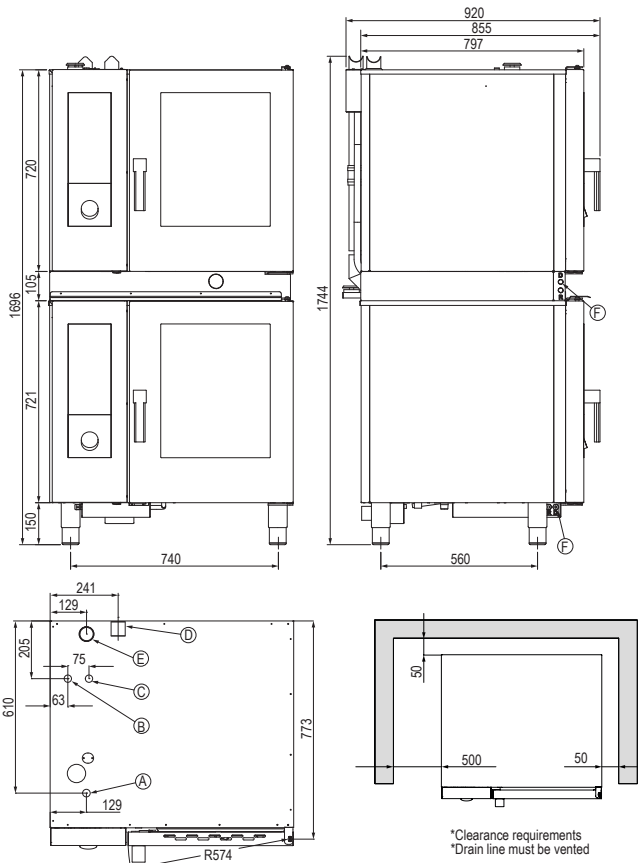

Specifications Stacked:

Standard Filter	SEHEST.11.0606.SF
Reverse Osmosis	SEHEST.11.0606.RO
W x D x H (mm)	863 x 920 x 1744
Weight	310kg
Total Power	29.6kW 3Ø + N + E

Specifications Oven:

Standard Filter	SEHE061WT.SF	SEHE061WT.SF
Reverse Osmosis	SEHE061WT.RO	SEHE061WT.RO
Capacity	6 x 1/1 GN Pans	6 x 1/1 GN Pans
Electrical	3Ø + N + E	3Ø + N + E
Connection	415VAC / 50Hz / 11.4kW	415VAC / 50Hz / 11.4kW
Cold Water	3/4 BSP	3/4 BSP
Connection	150-350 kpa Min 10°C - Max 35°C	150-350 kpa Min 10°C - Max 35°C
Water Quality Requirements	Hardness: 60-100ppm TDS: <100mg/L Cl Chloride: <32mg/L	Hardness: 60-100ppm TDS: <100mg/L Cl Chloride: <32mg/L

Legend:

- A: Electrical Connection
- B: Steam Generation Water Inlet 3/4" BSP
- C: Wash System Water Inlet 3/4" BSP
- D: Drain Connection 32mm
- E: Humidity Vent
- F: Detergent Line Inlet

Heat Source: 500mm clearance from an external heat source is required in order to protect the oven control components and allow access to the service panel. For clearances under 500mm, it is mandatory for Stoddart heat shields to be fitted while still maintaining a minimum clearance of 300mm to provide access to the service compartment. Failure to adhere to minimum clearances may void the oven warranty or add service costs due to lack of access.

Non-Heat Source: Generally 300mm clearance is required from the control panel side to allow access to the service panel. Any distance under 300mm, may add service costs due to lack of access.