

# AGNI UGR Product Datasheet

Backlit recessed 600x600 UGR <19 TPa panel light



## Product Data

Warranty	5 years
Applications	Interior
Certification(s)	CE, RoHS

## Physical Data

Colour Finish	White
Luminaire Fixing	Lay in, suspended, Surface Mounted
Construction Material	Aluminium
Diffuser Type	TP(a) Rated / UGR <19
Unit Weight (kg)	1.60 Kg


## Electrical Data

Voltage Range	AC220-240V
Power Factor	>0.90
Inrush Current	<60A
Protection Class IEC	Class II

## Performance Data

Efficacy	~105 Lm/W
°Kelvin	4000K
Operating Temperature	-20°C to +45°C (0°C to +40°C for emergency)
Beam Angle	90°
Operating Hours	>50000
CRI	>83 Ra
Flicker-free	Yes
IP Rating	IP20
Macadam Ellipse	≤6 sdcM
L70 B50	50,000 hours
L80 B50	30,000 hours
L90 B50	15,000 hours
LEDs	MTC


Backlit flicker-free panel light

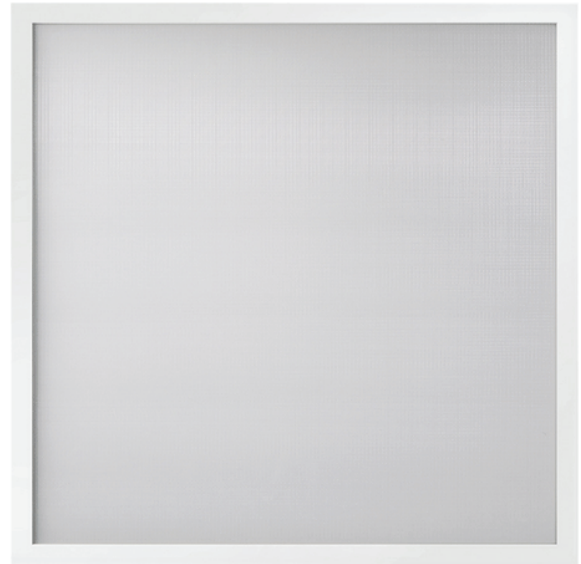

## Part Codes

	Wattage	Lumens	Running Current
SLLUGRPAN32	32W	3358	DC800mA
SLLUGRPAN45	45W	4727	DC1100mA



## Dimensions (mm)

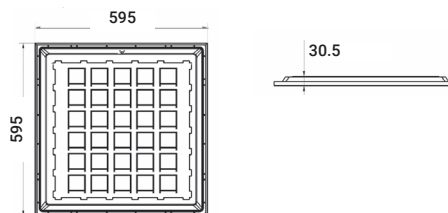

# AGNI UGR Family

Suffix	Option	
/45W	45W	1 <sup>st</sup> add high output suffix
/DH	Mains dimming	} 2 <sup>nd</sup> add dimming suffix
/DD	DALI dimming	
/DL	0-10V dimming	
/DSI	DSI dimming	

## Light Distribution:

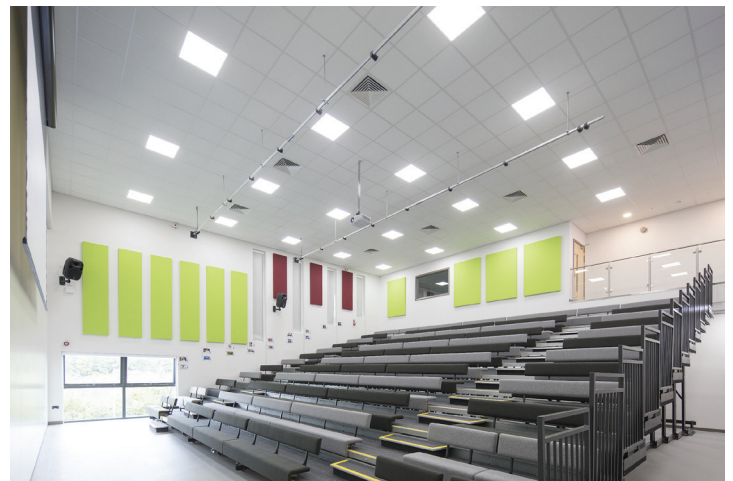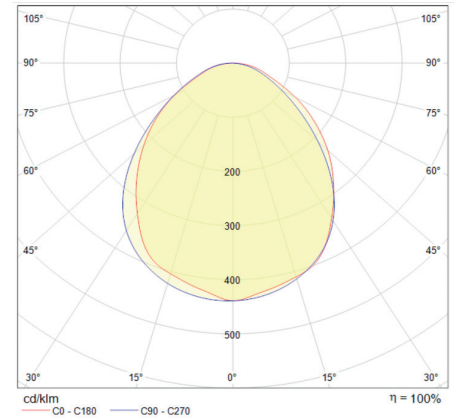

# AGNI UGR Panel add on items

Part code	Option
/EP	Emergency Pack
/DDPRO	DALI addressable panel emergency pack
/SMF	Surface Mounting Frame
/SK	AGNI Suspension Kit (Pack of 4)
/DP	Driver Plate

