



## Disruptive Path

Collection	Art Style
Style Name	Disruptive Path
Style Number	BT430
Product Type	Carpet Tile
Size	12" X 36"
Construction	Tufted
Installation	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone

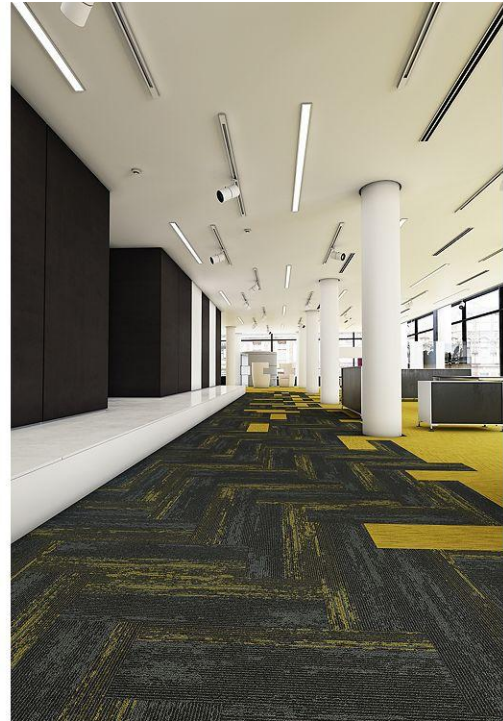


Feature	Description
Minimum Sq Yard	No minimum
SQ Yrds per carton	8.00
Pounds per Carton	29.04
Backing Material	EcoFlex Matrix
Fiber Type	ColorStrand® SD Nylon
Dye Method	Solution Dyed
Installation Methods	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone
Stitches per Inch	12 (47.24 per 10cm)
Density	7285
Tufted Pile Weight	17.00 oz/yd2 (576 g/m2)
Surface Texture	Level Multi-Colored Patterned Loop


## Recommended Installation Methods




Basket Weave




Brick Ashlar



Brick Ashlar




Brick Ashlar




Half Lap




Herringbone




Monolithic



Monolithic Stepping



Plank Half Lap



Random

## Colorways



### Mellow Yellow

Color code: 911  
Style number: BT430



### Orange Crush

Color code: 913  
Style number: BT430



### Purple Dawn

Color code: 914  
Style number: BT430



### Blue Dusk

Color code: 915  
Style number: BT430



### Lime Rush

Color code: 916  
Style number: BT430



### Pink Berry

Color code: 919  
Style number: BT430



### Neon Citron

Color code: 931  
Style number: BT430



### Crimson Flash

Color code: 933  
Style number: BT430



### Cotton Candy

Color code: 944  
Style number: BT430



### Above Par

Color code: 946  
Style number: BT430



### Purple Ash

Color code: 954  
Style number: BT430



### Cosmic Sky

Color code: 955  
Style number: BT430

## Performance

Feature	Description
Gauge	1/12 (47.00 rows per 10 cm)
Foot Traffic Recommendation TARR	Severe
Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV
Soil Release Technology	EcoSentry Soil Protection

## Sustainability

Feature	Description
Beyond Carbon Neutral	This product is 100% carbon neutral plus an additional 5% offset
Carbon Handprint	-0.06 kg CO2e/ft2
Embodied Carbon	1.2 kg CO2e/ft2
Total Recycled Content	61%
Pre-Consumer Recycled Content	61%
NSF 140	<a href="#">EcoFlex Matrix - NSF 140 Gold</a>
Indoor Air Quality	<a href="#">GLP 1171</a>
TVOC Range	0.5 mg/m3 or less
Red List Free	True
Mindful Materials	Participates in Mindful Materials Library
Take Back Program	<a href="#">ReCover Program</a>
Environmental Product Declaration	<a href="#">EPD EcoFlex Matrix</a>
Health Product Declaration	<a href="#">HPD 2.1 EcoFlex Matrix - 1000 ppm</a>
Environmental Claims Validation	<a href="#">EPD EcoFlex Matrix</a>
Global Green Tag	GreenRate Level A, LCARate Silver Plus
LEED Credit Potential	LEED Eligible
Living Product Challenge	Living Product Challenge 2.0

## Warranties

Lifetime Limited Carpet Tile Warranty, Lifetime Limited Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants, 10 Year Stain Warranty, Lifetime Static