
RIPPLE EFFECT







1 800.241.4692 | philadelphiacommercial.com

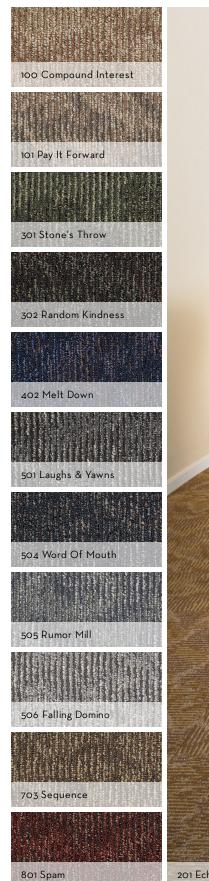

RIPPLE EFFECT



Style Name	RIPPLE EFFECT	
Collection Name	Relativity	
Style Number	Jon6	
Product Type	Carpet Tile	
Construction	Graphic Loop	
Fiber	100% Eco Solution Q100™ Nylon	
Dye Method	SOLUTION DYED	
Primary Backing	Synthetic	
Secondary Backing	Ecoworx	
Traffic Rating	Moderate	
Protective Treatments	SSP Protective Treatments	
	U.S.	Metric
Product Size	24 in x 24 in	60.96 cm x 60.96 cm
Area Per Carton	48 ft ²	4.46 m ²
Pieces Per Carton	12	
Gauge	1/10 in	39.37 per 10 cm
Stitches	9 per in	35 per 10 cm
Finished Pile Thickness	0.144 in	3.66 mm
Average Density	5500 oz/yd³	10.96
	-	
Total Thickness	0.295 in	7.49 mm
Total Thickness Tufted Weight		749 mm 745.9 g/m²

Recommended Installation Methods



1/4 Turn

Performance Testing

Pill Test	Pass
Radiant Panel	Class I
NBS Smoke	Less than 450
Electrostatic Propensity	Less than 3.5 kv
CRI Greenlabel Plus	GLP9968
ADA Compliance	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

Carpet Tile Lifetime Commercial Limited Warranty with Stain and Color

Environmental

Recycled Content

Pre-consumer - 36%, Post-consumer - 0%

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

