



printhead cleaner built in your ribbon.

- Built right into your thermal transfer ribbons
- Preventative maintenance
- Fast and easy to use
- Maintains excellent print quality
- Prolongs printhead life
- Minimizes costly downtime



Premium Wax/Resin



All Purpose Wax/Resin

Outstanding Versatility and Print Quality

Benefits


- Perform on a broad range of premium applications
- Prints on wide range of substrates including coated papers and smooth synthetic films.
- Excellent durability
- Stands up to rough handling, abrasion or moderate solvents
- Specially formulated backcoat protects the printhead

Recommended Stock

Coated paper (matte, semi gloss, high gloss) Polypropylene
 Polyolefin Polyethylene
 Polyester

Technical Specifications

Color Code Tab..... Teal
 Maximum Print Speed 8 IPS
 Film Thickness..... 4.5 Microns
 Total Ribbon Thickness... 8.4 Microns
 Transmission Density 2.6
 MacBeth Scale
 Ink Melting Point..... 65°C/149°F

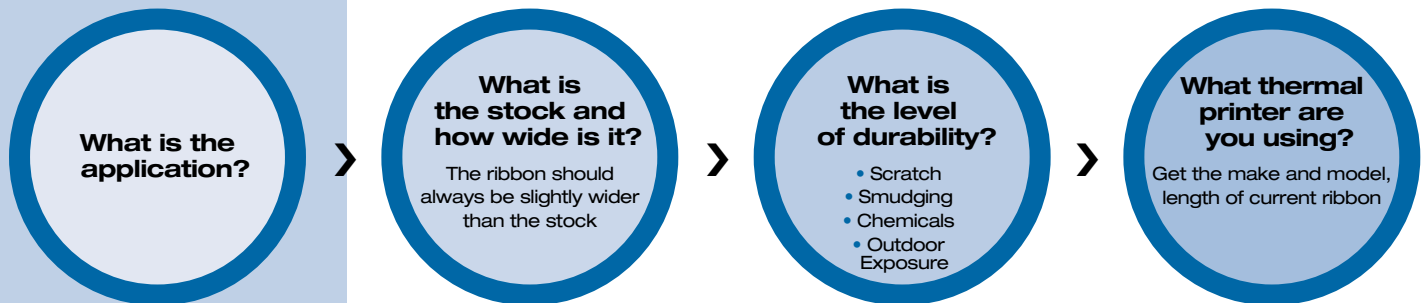

What you need to know to quote ribbon business.



Accurate Imaging Resources
Toll Free: 800.700.7377
Phone: 949.888.3880

Thermal Transfer Ribbon Storage Conditions

For optimal print results, thermal transfer printing should occur in the temperature range of 41° F to 95° F at 45% to 85% relative humidity. Suggested storage conditions for up to one year duration are 23° F to 104° F at 20% to 85% relative humidity. Exposing thermal transfer ribbons to direct sunlight or moisture will cause damage to the ribbons.