

# WTC UPFLOW SERIES | ACID NEUTRALIZERS




## BENEFITS

- *Increases pH level of water to a safe limit*
- *Protects copper plumbing systems and helps eliminate pinhole leaks*
- *Eliminates blue or green stains on fixtures*
- *Prevents scratching and pitting of porcelain and cookware*
- *No backwashing, no electric or drain line needed*



# WTC UPFLOW SERIES | ACID NEUTRALIZERS

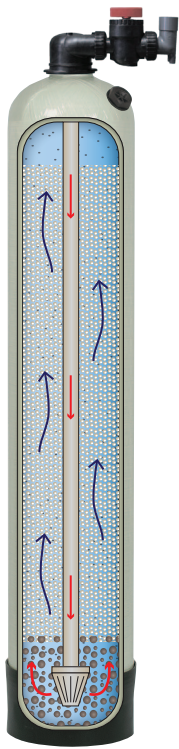

## FEATURES

- Fiberglass tank will not rust, durable design and efficient operation
- In/Out upflow Clack valve
- Bypass adaptable to 3/4" or 1"
- Dome hole fill port
- Equipped with upper distributor system to prevent loss of neutralizing media
- Warranty

Fiberglass Tank: 10 years

Valve: 1 year

## PH LEVELS

7.0	Neutral
6.8 - 6.9	Slightly Acidic
6.0 - 6.7	Moderately Acidic
4.0 - 5.9	Extremely Acidic

**Recommended range: 7.0 - 8.5**

Low pH causes blue or green stains and corrosion of plumbing fixtures. It can also cause pitting of porcelain and enamel fixtures and dishes.

**Important:** Water must have no iron and less than 200 ppm of TDS before neutralizing treatment. This unit can only be used to treat water with pH above 6.0.

## MEDIA OPTIONS (Sold separately)


Extra Fine Calcite



80% Calcite  
20% Mag Oxide



Fine Calcite



70% Calcite  
30% Mag Oxide



Medium Calcite



60% Calcite  
40% Mag Oxide



Processed Magnesium Oxide



100% Natural Magnesium Oxide



**WTCUP15ANX-BY**  
**WTCUP25ANX-BY**

Add filter media about every 3 to 6 months

## GRAVEL BED



Gravel bedding required  
1/4 x 1/8" Gravel



## CLACK 1191 IN-OUT HEAD



Inlet/Outlet Valve made of durable Noryl and non corrosive materials.

Engineered to handle high flow rates, which means less water pressure and flow loss at plumbing fixtures.

Includes bypass valve that provides a quick way to divert water from passing through the system.

## SPECIFICATIONS

Model	Capacity Cu. Ft.	Tank Size Inches	Service/Peak Flow Rate	Pipe Size In/Out	pH Range	50 lb bags of Media needed
WTCUP15ANX-BY	1.5	10" x 54"	5/6 gpm	3/4" or 1"	6 - 6.9	3
WTCUP25ANX-BY	2.5	13" x 54"	7/9 gpm	3/4" or 1"	6 - 6.9	5