


# WTF SERIES | TIME CLOCK WATER SOFTENERS




## BENEFITS

- *Smaller amounts of soaps and detergents are needed*
- *Cleaner and brighter laundry*
- *Reduced staining, spotting and scaling*
- *Extended water heater life expectancy*
- *Prevents scale build-up in pipes, fixtures, and appliances*

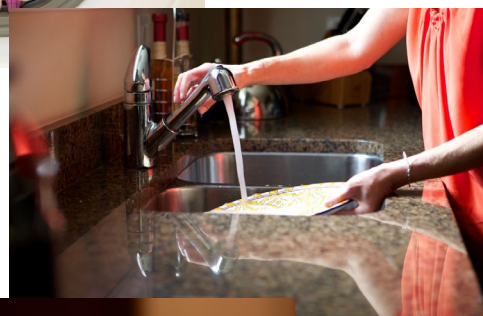

# WTF SERIES | TIME CLOCK WATER SOFTENERS



**WTF240**  
**WTF320-V**  
**WTF480-V**  
**WTF640-V**



## FEATURES

- Pre-loaded with C-800 high capacity resin
- Fiberglass tank will not rust
- High capacity polyethylene brine tank
- 12 Day Fleck 5600 Valve
- High flow bypass valve included
- Safety float in brine tank
- Warranty  
 Fiberglass Tank: 10 years  
 Brine Tank Shell: 5 years  
 Control Valve & Timer/Motor: 3 years

## HARDNESS TABLE

Less than 1.0 gpg	Soft
1.0 - 3.5 gpg	Slightly Hard
3.5 - 7.0 gpg	Moderately Hard
7.0 - 10.5 gpg	Hard
10.5 gpg and over	Extremely Hard
<b>Recommended range: 0 - 3.5 gpg</b>	
Hardness can leave deposits on dishes and clothing, scale in water heaters and soap in sinks and bathtubs. Clothes can look gray/unclean, and hair and skin can become dry.	

## MEDIA (Included)

C-800 Resin



## BRINE TANK MEDIA OPTIONS (Sold separately)

Coarse Solar Salt



Pellet Salt



Iron Fighting Salt



Potassium Chloride



## VORTECH PLATE



Environmentally friendly, reduces backwash requirement by up to 30%.  
 Designed for over 6,500 lbs. load capacity.  
 Highly efficient softening regeneration reduces annual salt consumption.

## FLECK 5600 VALVE



1-12 day time clock valve, simple to adjust and easy to service with quick access to all internal components.  
 Stainless steel bypass valve.  
 Regenerates at pre-set intervals.

## SPECIFICATIONS

Model	Capacity Grains	Tank Size Inches	Service Flow Rate	Backwash Flow Rate	Gal. Per Backwash	Pipe Size In/Out	Brine Tank Size	50 lb bags of Salt needed	Salt used per Regeneration
WTF240	24,000	8" x 44"	6 gpm	1.5 gpm	67	3/4"	18" x 33"	6 bags	12.0 lbs
WTF320-V	32,000	10" x 40"	8 gpm	2.0 gpm	82	1"	18" x 33"	6 bags	15.0 lbs
WTF480-V	48,000	10" x 54"	10 gpm	2.4 gpm	94	1"	18" x 33"	6 bags	23.0 lbs
WTF640-V	64,000	12" x 48"	12 gpm	3.5 gpm	142	1"	18" x 40"	8 bags	30.0 lbs