

WT UPFLOW SERIES | ACID NEUTRALIZERS




BENEFITS

- *Increases pH level of water to a safe limit*
- *Protects copper plumbing systems and helps eliminate pinhole leaks*
- *Eliminates blue or green stains on fixtures*
- *Prevents scratching and pitting of porcelain and cookware*
- *No backwashing, no electric or drain line needed*



WT UPFLOW SERIES | ACID NEUTRALIZERS

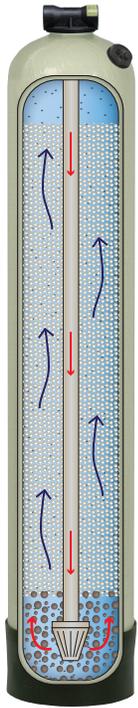

FEATURES

- Fiberglass tank will not rust, durable design and efficient operation
- In/Out Upflow Valve
- Dome hole fill port
- Equipped with upper distributor system to prevent loss of neutralizing media
- Warranty
Fiberglass Tank: 10 years
Valve: 1 year

PH LEVELS	
7.0	Neutral
6.8 - 6.9	Slightly Acidic
6.0 - 6.7	Moderately Acidic
4.0 - 5.9	Extremely Acidic

Recommended range: 7.0 - 8.5

Low pH causes blue or green stains and corrosion of plumbing fixtures. It can also cause pitting of porcelain and enamel fixtures and dishes.

Important: Water must have no iron and less than 200 ppm of TDS before neutralizing treatment. This unit can only be used to treat water with pH above 6.0.

MEDIA OPTIONS (Sold separately)

Extra Fine Calcite



80% Calcite
20% Mag Oxide



Fine Calcite



70% Calcite
30% Mag Oxide



Medium Calcite



60% Calcite
40% Mag Oxide



Processed Magnesium Oxide



100% Natural Magnesium Oxide



WTUP15ANX
WTUP25ANX

Add filter media about every 3 to 6 months

GRAVEL BED



Gravel bedding required
1/4 x 1/8" Gravel



890S • D7171 UPFLOW HEAD



The 890S distributor head is molded of rugged composite plastic and is designed for single in-out applications.

Inlet/Outlet openings are designed for easy, straight line installation.

SPECIFICATIONS

Model	Capacity Cu. Ft.	Tank Size Inches	Service/Peak Flow Rate	Pipe Size In/Out	pH Range	50 lb bags of Media needed
WTUP15ANX	1.5	10" x 54"	5/6 gpm	3/4"	6 - 6.9	3
WTUP25ANX	2.5	13" x 54"	7/9 gpm	3/4"	6 - 6.9	5