

WIRELESS THERMOMETER

QUICK START GUIDE




MODEL: 308-1410GRV2
DC: 090318

For more product information visit: bit.ly/laxtech_support

POWER UP

1. Install 2-AA batteries into your Outdoor Sensor.
2. Install 2-AA batteries into your Wireless Thermometer.
3. Place your sensor outside in a shaded location.

Sensor mounting video: bit.ly/TH_SensorMounting

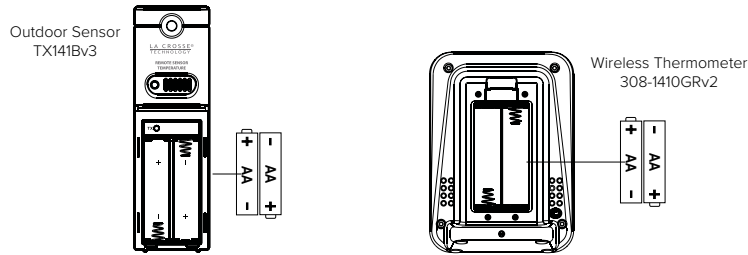

SETTINGS

1. Hold the SET/°F/°C button to enter the Settings Menu.
2. Press the MIN/MAX/+ button to adjust the values. Hold to adjust quickly.
3. Press the SET/°F/°C button to confirm and move to the next item.

Note: Use one button at a time in Settings Menu.

Settings order:

- 12/24 Hour Time Format
- Hour
- Minutes

FAHRENHEIT/ CELSIUS

- Press the SET/°F/°C button to select Fahrenheit or Celsius temperature display.

MIN/MAX TEMPERATURE

- Press the MIN/MAX/+ button to view minimum and maximum temperatures.
- When viewing minimum and maximum values, hold the MIN/MAX/+ button to reset them to your current readings.

Note: The station will automatically reset these min/max values daily at midnight (12:00 AM).

TEMPERATURE TREND ARROWS ↕

- Updating every 30 minutes, the Trend Arrows will indicate a rise or fall (2°F/1°C) in outdoor temperature over the past three hours.
- If no significant change has occurred, a strait or steady arrow will be presented.

LOW BATTERY INDICATOR ☐

- If a Low Battery Indicator is displayed in the Outdoor section, replace batteries in the sensor.
- If a Low Battery Indicator is displayed in the Indoor section, replace batteries in the thermometer.

SENSOR WEATHER SHIELD*

- The Sensor Weather Shield is designed to protect your outdoor sensor from rain and snow.
- This shield will offer limited protection from the sun's heat.
- Optional purchase at: bit.ly/925-1418



*Sold Separately

WE'RE HERE TO HELP!

If you require additional support, get in touch with our friendly customer support team based out of La Crosse, WI.

Phone: 1-608-782-1610

Online: bit.ly/contact_techsupport

Our knowledgeable customer support team is available:
Monday-Friday, 8am-6pm CST.

JOIN THE CONVERSATION

Ask questions, watch detailed setup videos, and provide feedback on our social media outlets!



SPECIFICATIONS

Indoor:

Temperature Range: 32°F to 122°F (0°C to 50°C)

Update Interval: About every 30 seconds

Outdoor:

Temperature Range: -40°F to 140°F (-40°C to 60°C)

Alkaline Batteries: -20°F to 140°F (-28.8°C to 60°C)

Lithium Batteries: -40°F to 140°F (-40°C to 60°C)

Distance: Over 330 ft. (100 meters)

RF 433MHz (open air)

Update Interval: About every 50 seconds

Power:

Wireless Thermometer: 2-AA, IEC, LR6 batteries (not included)

TX141-Bv3 Sensor: 2-AA, IEC, LR6 batteries (not included)

Battery Life:

Wireless Thermometer: Over 24 months

TX141-Bv3 Sensor: Over 24 months

Dimensions:

Wireless Thermometer: 3" L x 1.36"W x 4.17"H

(7.6 cm L x 3.4 cm W x 10.6 cm H)

TX141-Bv3 Sensor: 1.57" L x 0.79" W x 5.12" H

(4.0 cm L x 2.0 cm W x 13.0 cm H)

WARRANTY INFO

La Crosse Technology, Ltd. provides a **1-year limited time warranty** (from date of purchase) on this product relating to manufacturing defects in materials & workmanship.

La Crosse Technology, Ltd
2830 S. 26th St.
La Crosse, WI 54601

For Full Warranty Details, Visit: www.lacrossetechnology.com/support

CARE + MAINTENANCE

- Do not mix old and new batteries.
- Do not mix Alkaline, Lithium, standard, or rechargeable batteries.
- Always purchase the correct size and grade of battery most suitable for intended use.
- Clean the battery contacts and also those of the device prior to battery installation.
- Ensure the batteries have with correct polarity (+ / -).
- Remove batteries from equipment that will not be used for an extended period.
- Promptly remove expired batteries.

FCC STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Increase separation between equipment & receiver.
 - Consult the dealer or an experienced radio/TV technician for help.
- This device must not be co-located or operating in conjunction with any other antenna or transmitter.

Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

CAUTION!

The manufacturer is not responsible for any radio or TV interference caused by unauthorized changes or modifications to this equipment. Such changes or modifications could void the user authority to operate the equipment.

All rights reserved. This manual may not be reproduced in any form, even in part, or duplicated or processed using electronic, mechanical or chemical process without the written permission of the publisher.

This booklet may contain errors or misprints. The information it contains is regularly checked and corrections are included in subsequent editions. We disclaim any responsibility for any technical error or printing error, or their consequences. All trademarks and patents are recognized.



WARNING: This product can expose you to chemicals including styrene, which is known to the State of California to cause cancer. For more information go to: www.P65Warnings.ca.gov