

LA CROSSE[®]


TECHNOLOGY

Digital Atomic Wall Clock with Indoor/Outdoor Temperature Model: K86302 | Instruction Manual

INTRODUCTION:

The Digital Atomic Wall Clock features radio-controlled time, date, indoor and outdoor temperature on an easy to read display. Receives signal from the Atomic Clock in Colorado, for accurate time.

DIGITAL ATOMIC WALL CLOCK

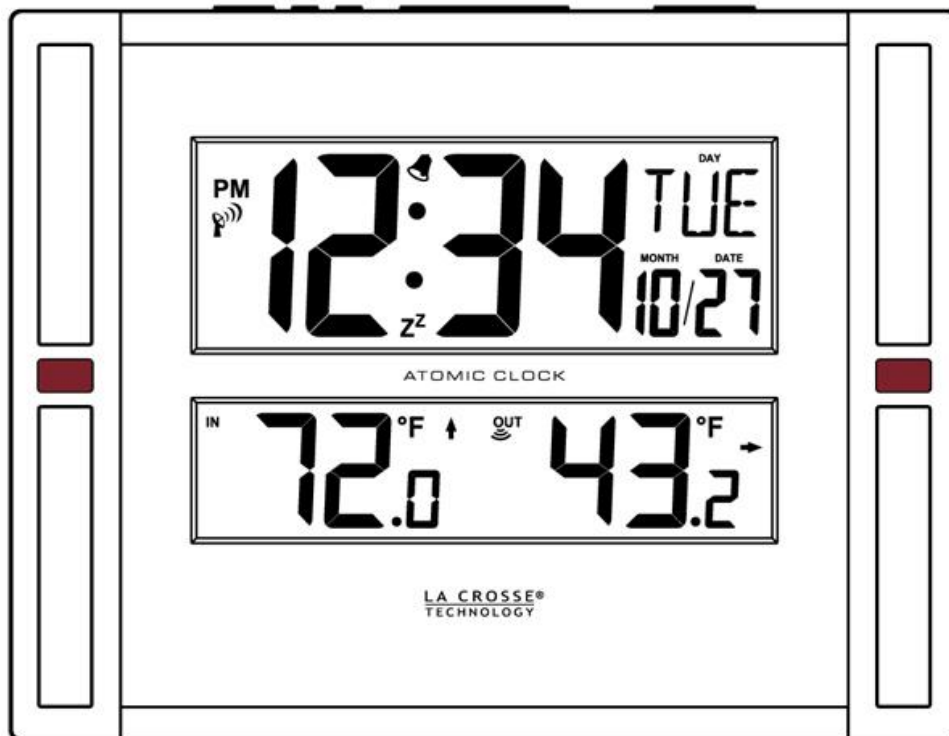

OUTDOOR TEMPERATURE TRANSMITTER TX14

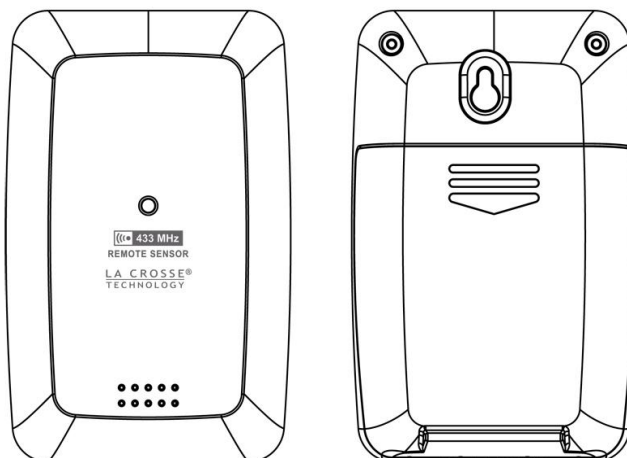


TABLE OF CONTENTS:

INTRODUCTION	1
DIGITAL ATOMIC CLOCK	1
OUTDOOR TRANSMITTER TX14	1
TABLE OF CONTENTS	2
FEATURES	3
INITIAL SETUP	3
WWVB RADIO CONTROLLED TIME	3
WWVB RECEPTION ICON	3
MANUAL SEARCH	3
BUTTON FUNCTIONS	4
PROGRAM MENU	4
WWVB RECEPTION ON/OFF	4
TIME ZONE	4
DST INDICATOR	4
12/24-HOUR TIME FORMAT	5
TIME SET	5
CALENDAR SET	5
FAHRENHEIT/CELSIUS	5
ALARM SET	5
ALARM ACTIVATION	6
SNOOZE	6
TEMPERATURE TREND ICONS	6
LOW BATTERY INDICATOR	6
OUTDOOR TRANSMITTER RECEPTION ICON	6
INSTALL BATTERIES IN THE DIGITAL ATOMIC CLOCK	7
INSTALL BATTERIES IN THE OUTDOOR TRANSMITTER	7
POSITIONING THE ATOMIC CLOCK	7
POSTIONING THE OUTDOOR TRANSMITTER	7
CARE AND MAINTENANCE	8
SPECIFICATIONS	8
ACCURACY	9
WARRANTY	9
FCC DISCLAIMER	10



K86302
 11" W x 1.1" D x 8.54" H (280 x 28 x 217 mm)
 2-AA, IEC, LR6 batteries (not included)



TX14
 2.5" L x 3.98" H x 1.42" W (64 x 101 x 36mm)
 2-AA, IEC, LR6 batteries (not included)

FEATURES:

- Wireless outdoor temperature (°F or °C) with trend arrow
- Monitors indoor temperature (°F or °C) with trend arrow
- Atomic time and date with manual setting
- Automatically updates for Daylight Saving Time (on/off option)
- Time display (hour / minute)
- Perpetual calendar (month / date / weekday)
- Seven Time zones:
 - Atlantic Time (AST)
 - Eastern Time (EST)
 - Central Time (CST)
 - Mountain Time (MST)
 - Pacific Time (PST)
 - Alaskan Time (AKT)
 - Hawaiian Time (HAT)
- Time alarm with snooze
- Wall hanging or free standing
- Low battery icon for clock and sensor

INITIAL SET UP:

1. Insert 2 AA batteries (not included) into the Digital Atomic Clock (**see Install Batteries in the Digital Atomic Clock**). The Digital Atomic Clock then shows time and indoor temperature.
2. Insert 2 fresh AA batteries into the transmitter, observing the correct polarity (**see Install Batteries in the Outdoor Transmitter**).
 - **Do Not Mix Old and New Batteries**
 - **Do Not Mix Alkaline, Standard, Lithium or Rechargeable Batteries**
3. Keep the transmitter 5-10 feet from the Digital Atomic Clock for 15 minutes to establish a good connection.
4. Within 3 minutes the outdoor temperature should be displayed on the Digital Atomic Clock. If the outdoor temperature is not displayed after 3 minutes remove batteries from the transmitter and the Digital Atomic Clock for 60 seconds and start again from step 1.
5. For optimum 433 MHz transmission, the outdoor transmitter should be placed within 200 feet (60 meters, open air) from the Digital Atomic Clock.

Note: The Digital Atomic Clock will start searching for the WWVB time signal for 2-10 minutes at start up.

WWVB RADIO CONTROLLED TIME

The NIST radio station, WWVB, is located in Ft. Collins, Colorado and transmits the exact time signal continuously throughout the United States at 60 kHz. The signal can be received up to 2,000 miles away through the internal antenna in the Digital Atomic Wall Clock. However, due to the nature of the Earth's Ionosphere, reception is very limited during daylight hours. The Digital Atomic Clock will search for a signal every night when reception is best. The WWVB radio station derives its signal from the NIST Atomic Clock in Boulder, Colorado.



WWVB RECEPTION ICON with full signal strength will appear on screen if the reception of atomic time is successful.

- The tower icon will show solid when the Digital Atomic Clock has received the WWVB signal.
- No tower icon displayed. The Digital Atomic Clock was unable to receive a signal at this time.
- Reposition the Digital Atomic Clock for better signal reception or try again at bedtime.
- The Digital Atomic Clock will start searching at UTC: 07:00 and if no reception on the first attempt it will try again at 08:00, 09:00, 10:00, and 11:00. Each attempt will be at least 2 minutes and the most will be 10 minutes.
- If there is no signal or too much interference the receiver will only be on for 2 minutes.
- If the signal is good it may catch in ABOUT 2-3 minutes.
- If the signal is marginal it will try to receive a signal for up to 10 minutes.
- **Manual Search:** Hold the -/TIME button to start a manual signal search.

Note: In case the Digital Atomic Clock is not able to detect the WWVB signal (disturbances, transmitting distance, etc.); the time can be manually set using the Program Menu.

BUTTON FUNCTIONS:

Button	Press and Release Functions	Hold 2 seconds
°F/°C	Move through program menu (setup) Select temperature in °F/°C	Enter program menu, set time, date, etc. (setup)
+	1 step forward (setup)	Search for outdoor Transmitter Fast advance (setup)
-	1 step backward (setup)	Fast backward (setup) WWVB Search
SNOOZE	Trigger snooze alarm (ringing)	
ALARM	Once: View Alarm Twice: Activate or Deactivate Alarm	Alarm set

BUTTONS:



PROGRAM MENU:

The °F/°C button will move through the program menu. The **+** or **-** button will change a value as needed.

- WWVB reception ON or OFF
- Time Zone (Seven Time Zones)
- Daylight Saving Indicator
- 12/24 hour time format
- Manual time set (Hour, Minutes)
- Calendar set (Year, Month, Date)

WWVB RECEPTION:

The WWVB time reception defaults to ON. To turn the WWVB reception OFF:

1. Hold the °F/°C button for 5 seconds.
2. **WWVB** and **ON** will flash.
3. Press and release the **+** or **-** button to turn this OFF.
4. Confirm with the °F/°C button and move to the **Time Zone**.



TIME ZONE:

This station offers seven time zones listed in letter format (default is EST):

- AST Atlantic Time
- EST Eastern Time
- CST Central Time
- MST Mountain Time
- PST Pacific Time
- AKT Alaskan Time
- HAT Hawaiian Time



1. **EST** will flash.
2. Press and release the **+** or **-** button to select a different Time Zone.
3. Confirm with the °F/°C button and move to **Daylight Saving Indicator**.

DAYLIGHT SAVING INDICATOR:

DST will default to the ON position as most of the country observes the DST change. If you live in an area does not observe the DST change, switch this to the OFF position.

1. **DST** and **ON** will flash.
2. Press and release the **+** or **-** button to turn DST to OFF.
3. Confirm with the °F/°C button and move to **12/24 hour time format**.



12 OR 24 HOUR TIME FORMAT:

The Time may be displayed in 12-hour or 24-hour format. Default is 12-hour time.

Note: When in 12-hour format AM or PM will show in front of the hour.

12Hr

1. **12H** will flash.
2. Press and release the **+ or -** button to select 24-hour time.
3. Confirm with the °F/°C button and move to **Set Time**.

SET TIME:

To set the time manually:

1. The **hour** digit will flash.
2. Press and release the **+ or -** button to select the hour.
3. Press and release the °F/°C button to set the **minutes**.
4. The **minute's** digit will flash.
5. Press and release the **+ or -** button to select the minutes.
6. Confirm with the °F/°C button and move to **Set Calendar**.

12:34

SET CALENDAR:

The date default of the Digital Atomic Clock is 1. 1. 2010.

To set the calendar:

1. The **year** will flash.
2. Press and release the **+ or -** button to set the year (between year 2010-2039).
3. Press the °F/°C button again to confirm and to enter the **month** setting.
4. The **month** will flash.
5. Press and release the **+ or -** button to set the month.
6. Press the °F/°C button again to confirm and enter **date** setting.
7. The **date** will flash.
8. Press and release the **+ or -** button to set the date.
9. Confirm all calendar settings with the °F/°C button to confirm and **exit** the program menu.

2010

Month Date
1 / 1


Note: The day of the week will set automatically once the year, month and date are set.

FAHRENHEIT/CELSIUS:

1. Press and release the °F/°C button once to switch from Fahrenheit to Celsius.


ALARM SET:

- **Alarm Hour:** Hold the ALARM button to enter alarm time setting mode. The Alarm Hour will flash. Use the **+ or -** button to set the Hour. Press and release the ALARM button to confirm and move to the minutes.
- **Alarm Minute:** The Alarm Minutes will flash. Use the **+ or -** button to set the Minutes. Press and release the ALARM button to exit.



Note: When the alarm sounds the alarm icon  will flash.



ALARM ACTIVATION ICON:




- Press and release the ALARM button once to show Alarm Time.
- With the Alarm time showing, press and release the ALARM button to **activate** the alarm. The alarm icon  appears when alarm is activated.
- With the Alarm time showing, press and release the ALARM button to **deactivate** the alarm. The alarm icon will disappear when alarm is activated.


SNOOZE:

- When the alarm sounds, press the SNOOZE button to trigger snooze alarm for 10 minutes. The snooze icon **Zz** and the alarm icon  will flash when the snooze feature is active.
- To stop alarm for one day, press AL button, while in snooze mode. The alarm icon  will remain solid.



TEMPERATURE TREND ICONS:

The temperature trend indicators are shown behind the indoor temperature and outdoor temperature readings. The indoor and outdoor temperature trend indicators are updated every 30 minutes. Trends arrows represent temperature changes over the past three hours. **Example:** At 3:00pm compare temperature readings to 12:00pm. At 3:30pm compare to 12:30pm readings.

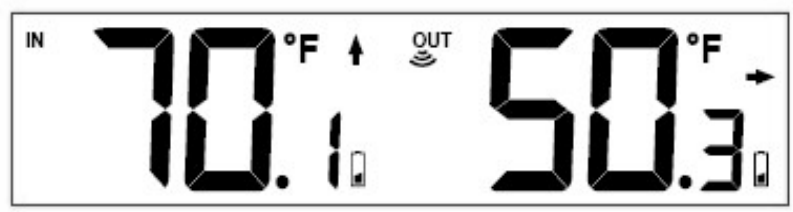-  Temperature rose more than 2°F (1°C) in the past three hours
-  Temperature did **not change** more than 2°F (1°C) in the past three hours
-  Temperature fell more than 2°F (1°C) in the past three hours



LOW BATTERY:

- When this icon  appears in the indoor (IN) reading section, replace the batteries in the Digital Atomic Clock.
- When this icon  appears in the outdoor (OUT) readings section, replace the batteries in the outdoor transmitter.


OUTDOOR TRANSMITTER RECEPTION ICON:

- When the signal is successfully received from the outdoor transmitter, the reception icon will be solid.
- The reception icon will flash when searching for the outdoor transmitter signal.
- If reception is not successful, the icon will not be shown in LCD.
- Hold the +/TEMP button to search for the outdoor transmitter.


INSTALL BATTERIES IN THE DIGITAL ATOMIC CLOCK:

1. Remove battery cover: Slide tab to the down and pull out to remove battery cover.
2. Install two fresh AA batteries according to the polarity markings.
 - **Do Not Mix Old and New Batteries**
 - **Do Not Mix Alkaline, Lithium, Standard, or Rechargeable Batteries**

If the Digital Atomic Clock does not show indoor temperature after 60 seconds, remove batteries and wait for at least 60 seconds before repeating the setup process.

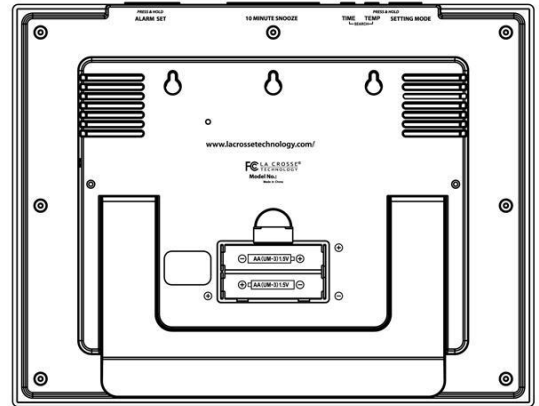

INSTALL BATTERIES IN THE OUTDOOR TRANSMITTER:



1. Slide the battery cover down, then lift off the back of the transmitter.
Note: Be careful not to break the tabs on the battery cover.
2. Insert two fresh AA batteries into the transmitter. Observe the correct polarity (see marking inside battery compartment).
3. Keep transmitter 5-10 ft. from the Digital Atomic Clock during setup.
4. After 15 minutes, if the outdoor temperature shows on the Digital Atomic Clock, you can move the outdoor transmitter outside to a shaded location within range of the Digital Atomic Clock.


POSITIONING THE ATOMIC CLOCK:

The Atomic Digital Wall Clock should be mounted near an exterior wall with the front or back facing toward Ft. Collins Colorado for best WWVB reception. The Digital Atomic Clock should be six feet from other electronics or wireless devices in order to best receive the outdoor temperature transmitter signal.

Foldout Table Stand:

A foldout table stand is located on the back of the clock.


- Pull the stand out from the bottom center edge of the Digital Atomic Clock, below the battery compartment.
- Once the foldout table stand is extended, place the Digital Atomic Clock in an appropriate location.



Wall Mount

- Use a straightedge to horizontally space three screw positions on a wall to match the hanging holes on the back of the clock. Install three mounting screws (not included) into a wall within transmission range—leaving approximately 3/16 of an inch (5mm) extended from the wall.
- Place the Digital Atomic Clock onto the screws, using the hanging holes on the backside.
- Gently pull the Digital Atomic Clock down to lock the screws into place.

Note: Always ensure that the Digital Atomic Clock locks onto the screws before releasing.




POSITIONING THE WIRELESS OUTDOOR TRANSMITTER:

Once the Digital Atomic Clock displays the outdoor temperature, place the clock and the transmitter in the desired locations and wait approximately 1-hour before permanently mounting the transmitter to ensure that there is proper reception.

The transmitter should be mounted vertically, in a shaded, protected area, at least 6 feet from the ground to avoid damage and ensure accurate readings. The transmitter is water resistant, not waterproof and should not be placed anywhere it will become submerged in water or subject to standing water or snow.

Wall Mount

- Choose a shaded location (under an overhang) for the transmitter that is within the confirmed wireless reception range of the Digital Atomic Clock for accuracy.
- Install one mounting screw (not included) into a wall leaving approximately ½ of an inch (12.7mm) extended.
- Place the hanging hole (on the back of the transmitter) onto the mounting screw and gently slide the transmitter down onto the mounting screw to secure it into place.



IMPORTANT: For true temperature readings, mount the transmitter out of direct sunlight on a North-facing wall or in any other well shaded area like under an eave or deck rail. The maximum transmitting range in open air is over 200-feet (60 meters). Obstacles such as walls, windows, stucco, concrete, and large metal objects can reduce the range. Place the transmitter at least 6 feet in the air to improve signal transmission.

CARE AND MAINTENANCE:

• Do Not Mix Old and New Batteries

• Do Not Mix Alkaline, Standard, Lithium or Rechargeable Batteries

- Do not expose the Digital Atomic Clock to extreme temperatures, vibration or shock.
- Keep Digital Atomic Clock dry.
- Clean Digital Atomic Clock with a soft damp cloth. Do not use solvents or scouring agents.
- The Digital Atomic Clock is not a toy. Keep it out of reach of children.
- The Digital Atomic Clock is not to be used for medical purpose or for public information, but is determined for home use only.
- The specifications of this Digital Atomic Clock may change without prior notice.
- Improper use or unauthorized opening of housing will void the warranty.
- If the Digital Atomic Clock does not work properly, change the batteries.

SPECIFICATIONS:

Indoor:

Temperature Range: +32°F to +122°F (0°C to 50°C)
Interval: About every 30 seconds

Outdoor:

Temperature Range: -40°F to 140°F (-40°C to 60°C)

Alkaline Batteries: -20°F to 140°F (-28.8°C to 60°C)

Lithium Batteries: -40°F to 140°F (-40°C to 60°C)

Temperatures below - 20°F (-28.8°C) require Lithium batteries in the outdoor sensor.

Distance: Over 200 ft. (60 meters) RF 433MHz (open air)
Interval: About every 30 seconds

Power:

Digital Atomic Clock: 2-AA, IEC, LR6 batteries (not included)
TX14 Transmitter: 2-AA, IEC, LR6 batteries (not included)

Battery Life:

TX14 Transmitter

Battery Life: Battery life is over 24 months when using reputable battery brands for both Alkaline and Lithium batteries

Digital Atomic Clock

Battery Life: Over 12 months.

Dimensions:

Digital Atomic Clock: 11" W x 1.1" D x 8.54" H (280 x 28 x 217 mm)
TX14 Transmitter: 2.5" L x 3.98" H x 1.42" W (64 x 101 x 36mm)

ACCURACY:

Indoor Temperature:

- 1) Measure range=32°F to 140°F (0°C to 50°C)
- 2) Accuracy ± 1 degree Fahrenheit at room temperature (68°F to 75°F)(20°C to 24°C)
- 3) Accuracy ± 2 degrees Fahrenheit 32°F to 122°F (0°C to 50°C)
- 4) Resolution=0.1°F or 0.1°C
- 5) When above 122 °F (50°C) the temperature should continue to read the correct temperature as long as the LCD display continues to function
- 6) When below 32 °F (0°C) the temperature should continue to read correctly as long as the LCD display continues to function
- 7) Temperature Cycle: 30 seconds

Outdoor Temperature:

- 1.) Measure range = -40 °F to 158 °F (0°C to 70°C)
- 2.) Accuracy ± 1 degree Fahrenheit at room temperature (68F-to-75F) (20°C-to-24°C)
- 3.) Accuracy ± 2 degrees Fahrenheit 32 F to 122 F (0°C to 50°C)
- 4.) Accuracy ± 4 degrees Fahrenheit otherwise
- 5.) Resolution = 0.1 degree F

WARRANTY INFORMATION:

La Crosse Technology, Ltd provides a 1-year limited warranty on this product against manufacturing defects in materials and workmanship.

This limited warranty begins on the original date of purchase, is valid only on products purchased and used in North America and only to the original purchaser of this product. To receive warranty service, the purchaser must contact La Crosse Technology, Ltd for problem determination and service procedures. Warranty service can only be performed by a La Crosse Technology, Ltd authorized service center. The original dated bill of sale must be presented upon request as proof of purchase to La Crosse Technology, Ltd or La Crosse Technology, Ltd's authorized service center.

La Crosse Technology, Ltd will repair or replace this product, at our option and at no charge as stipulated herein, with new or reconditioned parts or products if found to be defective during the limited warranty period specified above. All replaced parts and products become the property of La Crosse Technology, Ltd and must be returned to La Crosse Technology, Ltd. Replacement parts and products assume the remaining original warranty, or ninety (90) days, whichever is longer. La Crosse Technology, Ltd will pay all expenses for labor and materials for all repairs covered by this warranty. If necessary repairs are not covered by this warranty, or if a product is examined which is not in need or repair, you will be charged for the repairs or examination. The owner must pay any shipping charges incurred in getting the La Crosse Technology, Ltd product to a La Crosse Technology, Ltd authorized service center.

The La Crosse Technology, Ltd warranty covers all defects in material and workmanship with the following specified exceptions: (1) damage caused by accident, unreasonable use or neglect (including the lack of reasonable and necessary maintenance); (2) damage occurring during shipment (claims must be presented to the carrier); (3) damage to, or deterioration of, any accessory or decorative surface; (4) damage resulting from failure to follow instructions contained in the owner's manual; (5) damage resulting from the performance of repairs or alterations by someone other than an authorized La Crosse Technology, Ltd authorized service center; (6) units used for other than home use (7) applications and uses that this product was not intended or (8) the products inability to receive a signal due to any source of interference.. This warranty covers only actual defects within the product itself, and does not cover the cost of installation or removal from a fixed installation, normal set-up or adjustments, claims based on misrepresentation by the seller or performance variations resulting from installation-related circumstances.

LA CROSSE TECHNOLOGY, LTD WILL NOT ASSUME LIABILITY FOR INCIDENTAL, CONSEQUENTIAL, PUNITIVE, OR OTHER SIMILAR DAMAGES ASSOCIATED WITH THE OPERATION OR MALFUNCTION OF THIS PRODUCT. THIS PRODUCT IS NOT TO BE USED FOR MEDICAL PURPOSES OR FOR PUBLIC INFORMATION. THIS PRODUCT IS NOT A TOY. KEEP OUT OF CHILDREN'S REACH.

This warranty gives you specific legal rights. You may also have other rights specific to the State. Some States do not allow the exclusion of consequential or incidental damages therefore the above exclusion of limitation may not apply to you.

For warranty work, technical support, or information contact:

La Crosse Technology, Ltd
2817 Losey Blvd. S.
La Crosse, WI 54601



The complete instruction manual is available at:
www.lacrossetechnology.com/k86302



Protected under U.S. Patents:
5,978,738
6,076,044
6,597,990

Contact Support: 1-608-782-1610
Product Registration: www.lacrossetechnology.com/support/register

FCC DISCLAIMER:

This Device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) the device must accept any interference received, including interference that may cause undesired operation.

NOTE: THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER AUTHORITY TO OPERATE THE EQUIPMENT

All rights reserved. This handbook must not be reproduced in any form, even in excerpts, or duplicated or processed using electronic, mechanical or chemical procedures without written permission of the publisher. This handbook may contain mistakes and printing errors. The information in this handbook is regularly checked and corrections made in the next issue. We accept no liability for technical mistakes or printing errors, or their consequences. All trademarks and patents are acknowledged.