


Wireless Temperature Station




Buttons

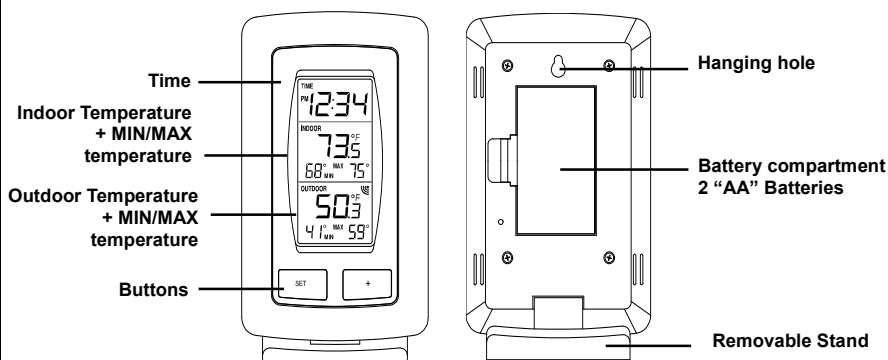

Note: This station reads in °F and 12 hour time format only.

TX40U-IT
Sensor
2 -AAA
batteries

Battery
Cover



Get Started

Step 1: Insert 2 fresh AAA, LR3 1.5 volt batteries into the TX40U-IT sensor according to polarity markings.

Step 2: Insert 2 fresh AA, LR6 1.5 volt Alkaline batteries into the temperature station according to the polarity markings.

Restart: If the outdoor temperature is not displayed after 3 minutes, remove batteries from the temperature station and outdoor sensor. Press any button on the temperature station 20 times. After 15 minutes, return to **Step 1** above.

Set Time

1. Hold the **SET** button and the hour will flash. Press the **+** button to set the hour.
2. Press the **SET** button and the minutes will flash. Press the **+** button to set the minutes. Press the **SET** button to exit.

MIN/MAX Readings

The minimum and maximum temperatures are from setup, until you reset the min/max temperatures or remove the batteries from the station.

- For a 24-hour min/max reading: reset the min/max temperatures at the same time each day.
- **Reset:** Hold the **+** button for 3-5 seconds to reset all the min/max values to current temperature.

Low Battery Icon

- When the low battery icon is displayed above the outdoor temperature, replace batteries in the outdoor sensor.
- When the low battery icon is displayed above the indoor temperature, replace batteries in the temperature station.



Position Outdoor Sensor

- Mount the outdoor sensor on a north-facing wall or in any well shaded area. Under an eave or deck rail is preferred.
- The maximum transmitting range to the temperature station is over 200 feet (60 meters) in open air, not including walls.

Specifications

Indoor:	
Temperature Range:	14.5°F to +139.5°F -9.9°C to +37.7°C
Outdoor:	
Temperature Range:	-39.8°F to +139.8°F -39.9°C to +59.9°C
Distance:	Over 200 ft. (60 meters) RF 915MHz (open air)
Interval:	About every 4 seconds
Power:	
Temperature station	3-AA, IEC, LR6 batteries (not included)
TX40U-IT Sensor:	2-AA, IEC, LR6 batteries (not included)
Battery Life:	
Temperature station	Over 24 months
TX40U-IT Sensor:	Over 12 months
Dimensions:	
Temperature station :	5.6" x 1.4" x 3.6" (142.2 x 35.6 x 91.4mm)
TX40U-IT Sensor:	5.05" x 1.50" x 0.83" (128.3 x 38.2 x 21.2 mm)

Care and Maintenance

- **Do not mix old and new batteries**
- **Do not mix Alkaline, Standard, Lithium or Rechargeable Batteries**
- Do not expose to extreme temperature, vibration or shock.
- Clean with a soft damp cloth. Do not use solvents.
- The clock is not a toy. Keep it out of reach of children.
- The clock is not to be used for medical purpose or for public information. It is intended for home use only.
- The specifications of this product may change without prior notice.
- Improper use or unauthorized opening of housing voids warranty.

Warranty and Support Information

La Crosse Technology, Ltd. provides a 1-year limited time warranty (from date of purchase) on this product relating to manufacturing defects in materials & workmanship.

View full warranty details online at:

www.lacrossetechnology.com/warranty_info.pdf

For warranty work, technical support or other information contact:

La Crosse Technology, Ltd
2830 26th Street S.
La Crosse, WI 54601

Contact Support:

1-608-782-1610

Online Product Support:

www.lacrossetechnology.com/support

Product Registration:

www.lacrossetechnology.com/support/register

Protected under U.S. Patents:

5,978,738 / 6,076,044 / 6,597,99



FCC Statement

This Device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) the device must accept any interference received, including interference that may cause undesired operation. NOTE: THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER AUTHORITY TO OPERATE THE EQUIPMENT

All rights reserved. This handbook must not be reproduced in any form, even in excerpts, or duplicated or processed using electronic, mechanical or chemical procedures without written permission of the publisher.

This handbook may contain mistakes and printing errors. The information in this handbook is regularly checked and corrections made in the next issue. We accept no liability for technical mistakes or printing errors, or their consequences.