

Specification





## Features of LiFePO4 Battery

- Longer Cycle Life: Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.
- Lighter Weight: About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.
- Higher Power: Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.
- **Wider Temperature Range**: -20 ℃~60 ℃.
- Superior Safety: Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.
- Increased Flexibility: Modular design enables deployment of up to four batteries in series and up to ten batteries in parallel.




ecification			
Electrical Characteristics	Nominal Voltage	12.8V	
	Rated Capacity (77°F/25°C)	200Ah @0.5C	
	Cell Type	Cylindrical cell-26700-4Ah-4S50P	
	Circuit Protection	Over charge, Over discharge, Over current, Over temp,	
		Short, Balance, 4S150A BMS	
	Cycle Life	3000times Cycles @100%DOD and 6000times @80% DOD	
	Monthly Self Discharge	Less than 2%	
	Efficiency of Charge	100% @0.5C	
	Efficiency of Discharge	96-99% @1C	
Charge	Charge Voltage	14.6±0.2V	
	Standard Charge Current	40A	
	Max.Charge Current	100A	
Discharge	Standard Discharge Current	40A	
	Max. Continuous Current	150A	
	Discharge Cut-off Voltage	10V	
Environmental	Charge Temperature	0℃-55℃	@60±25% Relative Humidity
	Discharge Temperature	<b>-20</b> °C-60°C	
	Storage Temperature	<b>-20</b> °C <b>-45</b> °C	
Dimensions	Group 49	490*171*240mm	
Case / IP class	Plastic case / IP65		
Terminal	M8		
Approx Weight	20Kg		
Certification	Cell (UN38.3, IEC62619, IEC62133, ROHS, REACH, UL1642)		
Certification	Battery (UN38.3, MSDS)		



60 0

10 12

Storage Time(Months)

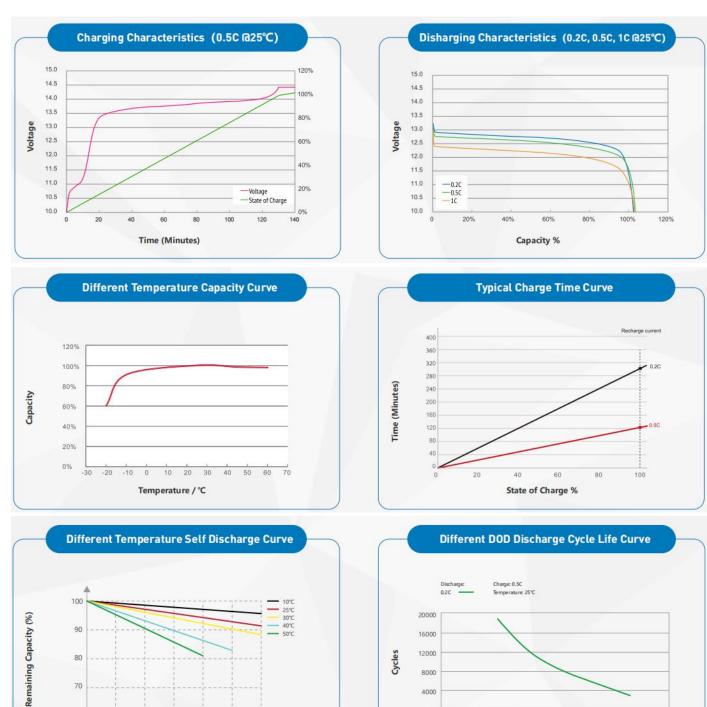

40%

20%

60%

Depth of Discharge (DOD)

100%