

# 8-Port 10/100TX Fast Ethernet Switch



### High-speed 10/100Mbps Workgroup Switch

PLANET Fast Ethernet Switch FSD-803 provides business and home users with a cost-effective integrated system of small-office / home-office networking. It is with compact-sized metal case design and just right for the network of 10 to 50 users.

### Stable Fast Ethernet Switch Performance

The FSD-803 also supports Store-and-Forward forwarding scheme to ensure low latency and high data integrity. The high performance throughput (filtering / forwarding rate: 14,880 packets per second in 10Mbps, and 148,800 packets per second in 100Mbps) and 448K bit packet buffer help the FSD-803 to boost bandwidth, eliminate unnecessary traffic, and relieve congestion on your critical server path. With an intelligent address recognition algorithm, the FSD-803 could recognize up to a 1K different MAC address and provide 1.6Gbps switching capacity, which makes the FSD-803 offer wire-speed packets transfer performance without risk of packet loss.

### Flexible Desktop Size Design

The FSD-803 is the fancy-shaped standard metal model to fit into space-limited environment. With concepts of "Easy to install and use", "Compact sized design", and "Simple troubleshooting", the FSD-803 provides cost-conscious business and home users with the foundation from an integrated system of small-office / home-office networking.

### RJ-45 Interface

- Eight 10/100Mbps Fast Ethernet ports
- Complies with IEEE 802.3, 10Base-T, IEEE 802.3u 100Base-TX Ethernet standards
- Supports auto MDI/MDI-X function

### Switching

- Hardware-based 10/100Mbps, half / full duplex , flow control and auto-negotiation
- Features Store-and-Forward mode with wire-speed filtering and forwarding rates
- IEEE 802.3x flow control for full duplex operation and back pressure for half duplex operation
- Integrated address look-up engine, supporting 1K absolute MAC addresses
- Handles up to 1536bytes packet
- Automatic address learning and address aging
- Supports CSMA/CD protocol

### Hardware

- Made of metal, desktop size and wall-mount design
- LED indicators for system power, per port Link / Act
- 5V DC, 1A external power adapter
- One power on/off button for energy saving
- FCC, CE Class B compliant




*Power Energy Saving*

With one power ON/OFF button designed on the rear panel of the FSD-803, it can help users to reduce unnecessary power energy loss while the FSD-803 operation is OFF.

*Plug & Play and Easy Installation*


All RJ-45 copper interfaces in the FSD-803 support 10/100Mbps auto-negotiation for optimal speed detection through RJ-45 Category 5/5e cables. Supporting standard for auto-MDI/MDI-X can detect the type of connection to any Ethernet device without requiring special straight or crossover cables. The Flow Control function allows the FSD-803 to support routers and servers for direct connection to this switch with fast and reliable data transfer.

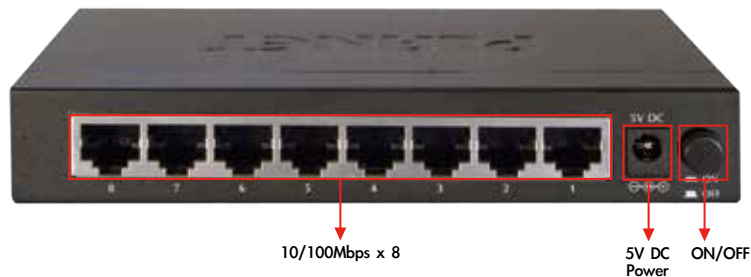

**Product Applications**

*Ideal Switch for Home / SOHO Network*

With eight 10/100Mbps ports, the FSD-803 provides a cost-effective and high-performance solution for Home and SOHO network applications. To segment the network and ease the network traffic, the FSD-803 is perfect for SOHO switched networks as the friendly network backbone. In addition, the network status can be monitored at a glance by the FSD-803 providing array LED indicators.

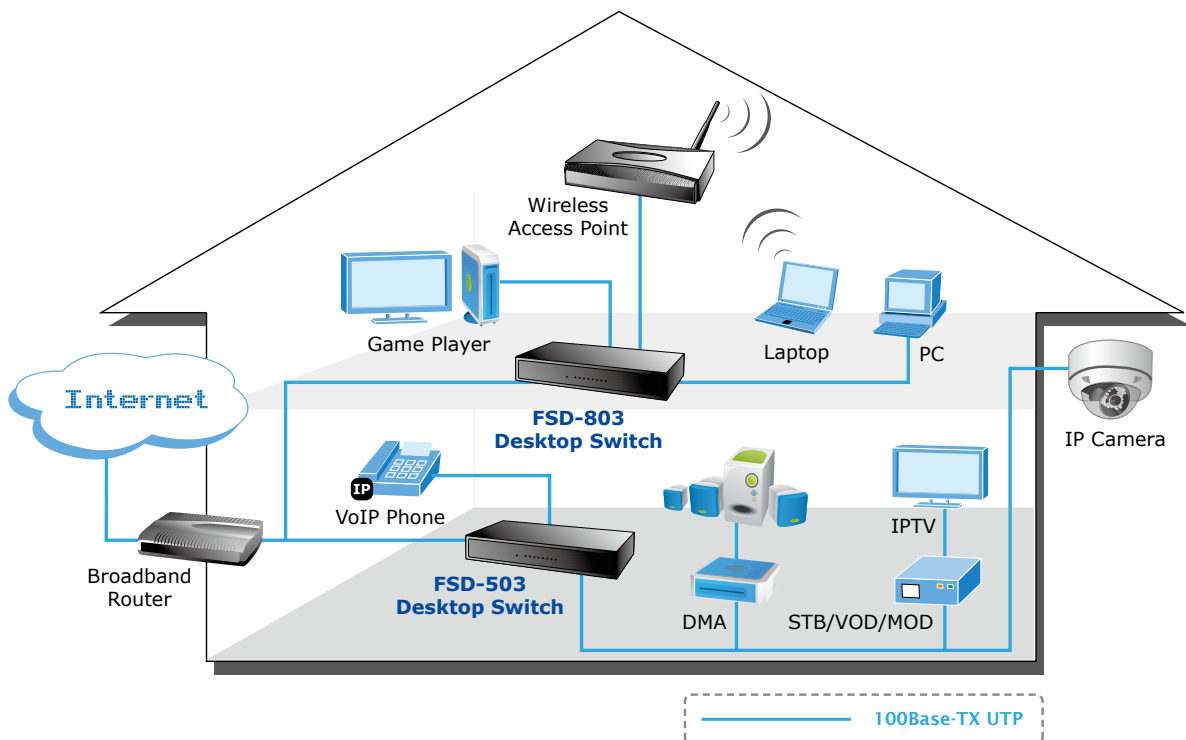

## Specifications

Model	FSD-803
<b>Hardware Specifications</b>	
Hardware Version	4
10/100Base-TX Ports	8 auto MDI/MDIX ports
LED Display	One for Power, One for Link / Act per port
Enclosure	Metal
Dimensions (W x D x H)	155 x 86 x 26 mm
Weight (g)	316g
Power Requirements (External Power Adapter)	5V DC, 1A
Power Consumption (100M Full Operation)	2.6 watts / 8.8 BTU
<b>Switch Specifications</b>	
Switch Processing Scheme	Store-and-Forward
Address Table	1K
Share Data Buffer	448k
Flow Control	Back pressure half duplex, IEEE 802.3x pause frame full duplex
Switch Fabric	1.6Gbps
Throughput (packet per second)	1.19Mpps
Maximum Packet Size	1536bytes
<b>Standards Conformance</b>	
Standards Compliance	IEEE 802.3 (Ethernet) IEEE 802.3u (Fast Ethernet) IEEE 802.3x (Full-duplex Flow Control)
Regulation Compliance	FCC Part 15 Class B, CE
<b>Environments</b>	
Temperature	Operating: 0~50 degrees C Storage: -10~70 degrees C
Humidity	Operating: 5~95% Storage: 5~95% (non-condensing)

## Ordering Information

FSD-803	8-Port 10/100TX Fast Ethernet Switch (Metal case)
---------	---