

Industrial IP67 Rated 8-Port 10/100Mbps M12 Fast Ethernet Switch with Wide Operating Temperature



In last few years, PLANET has launched various IP30 protected Industrial products which can be deployed and provide stable Ethernet performance under difficult Industrial environments. To further satisfy some specific Industrial environment, PLANET now releases new series of Industrial Solution, the ISW-800T-M12, to provide higher level protection ability with the following features:

- Industrial Protected IP67 Metal Case
- Robust M12 Ethernet Connector
- Waterproof / Dustproof
- Wide Temperature Support

Industrial IP67 Metal Case and Robust M12 Ethernet Connector Interface

The ISW-800T-M12, the Industrial 8-Port 10/100Mbps M12 Fast Ethernet Switch, is designed with the IP67 industrial case, providing a high level of immunity against electromagnetic interference and heavy electrical surges which are usually found on plant floors or in curb side traffic control cabinets. The compact, IP67 standard metal case of the ISW-800T-M12 allows either DIN rail or wall mounting installation for efficient use of cabinet space.

The ISW-800T-M12 is equipped with eight 10/100Base-TX auto-negotiation ports M12 connector interfaces. The M12 connector provides tightly, strong connection and guarantees stable Ethernet operation performance under high vibration and shock environment.



Stable Operate Performance under Difficult Environments

Being able to operate under the temperature range from -40 to 75 Degree C, the ISW-800T-M12 can be placed in almost any difficult environment. The ISW-800T-M12 also possesses an integrated power supply source with wide range of voltages (12 to 48V DC) for worldwide high availability applications requiring dual or backup power inputs.

Robust Switch Performance

The ISW-800T-M12 has 2K MAC Address table and offers wire-speed packets transfer performance without risk of packet loss; the high data throughput of the device makes it ideal for most Fast Ethernet environments. With a **1.6Gbps** internal switching fabric and featuring auto negotiation support in each of the eight Fast Ethernet ports, the ISW-800T-M12 can handle large amounts of data in a secure topology linking to a backbone or high capacity servers.

The flow control function enables the ISW-800T-M12 to provide fast and reliable data transfer. All of the M12 RJ-45 copper interfaces in the ISW-800T-M12 support 10/100Mbps Auto-Negotiation for optimal speed detection through RJ-45 Category 3, 4, 5, 5e, 6 cables. The standard Auto-MDI/MDI-X support can detect the type of connection to any Ethernet device without requiring special straight or crossover cables.

KEY FEATURES

PHYSICAL PORT

- 8-Port 10/100Mbps M12 Connector with IP67 protection

LAYER 2 FEATURES

- Supports Auto-Negotiation and 10/100Mbps half / full duplex mode
- High performance Store and Forward architecture, runt/CRC filtering eliminates erroneous packets to optimize the network bandwidth
- Prevents packet loss with back pressure (Half-Duplex) and IEEE 802.3x PAUSE frame flow control (Full-Duplex)
- Backplane (Switching Fabric): 1.6Gbps
- Integrated address look-up engine, supports 2K absolute MAC addresses
- Automatic address learning and address aging
- CSMA/CD Protocol


INDUSTRIAL CASE / INSTALLATION

- IP67 Aluminum metal case protection
- DIN Rail and Wall Mount Design
- Waterproof / dustproof design
- 12 to 48V DC, redundant power with polarity reverse protect function and connective removable terminal block for master and slave power
- Supports EFT protection 6000 VDC for power line
- Supports 6000 VDC Ethernet ESD protection
- -40 to 75 Degree C operating temperature

APPLICATIONS


Public Construction for Data Collection and Forwarding

The ISW-800T-M12 is equipped with eight 10/100Base-TX auto-negotiation ports M12 connector interfaces, and offers 1.6Gbps non-blocking switch fabric and the 2K MAC Address table. It can perform wire-speed packets transfer without risk of packet loss. The M12 connector provides tightly, strong connection and guarantees stable Ethernet operation performance under high vibration and shock environment such as public Transmission System and Railway Transmission.

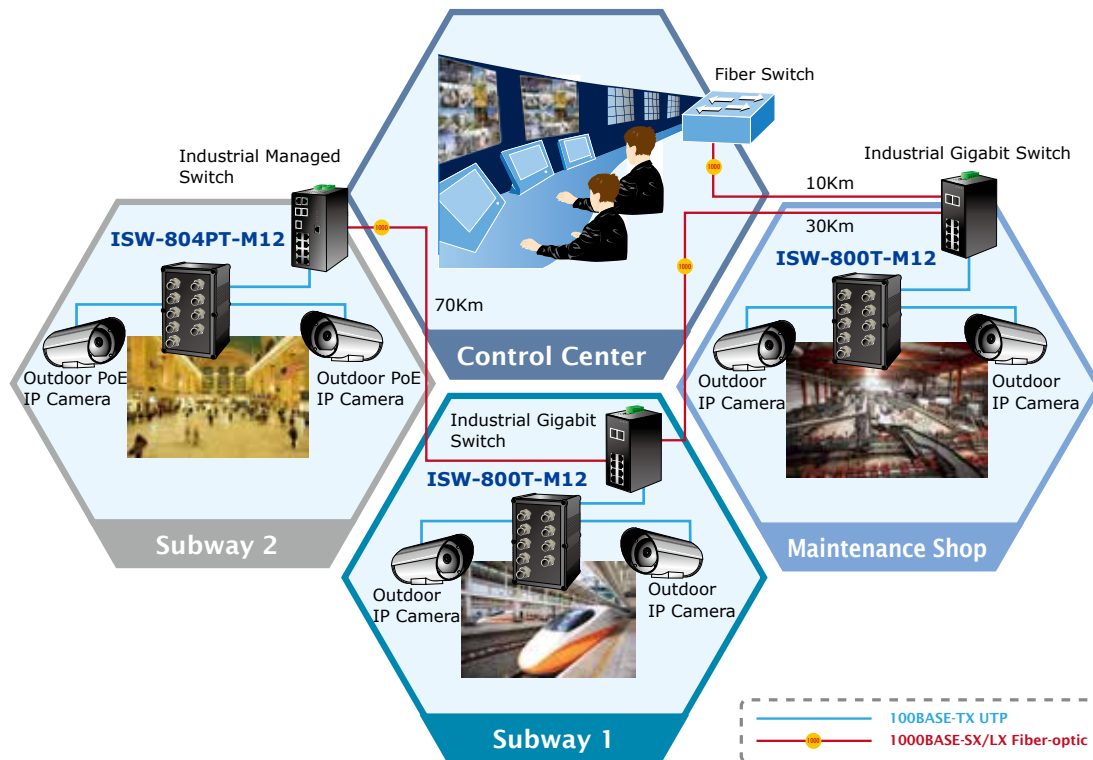

SPECIFICATION

Product	Industrial IP67 Rated 8-Port 10/100Mbps M12 Ethernet Switch (-40~75 Degree C)
Model	ISW-800T-M12
Hardware Specification	
10/100Base-TX Ports	8 x M12, 4-Pin D-coded female connector
Power Connector	1 x M12, 5-Pin A-Coded male connector
Enclosure	IP67 Aluminum
Dimension (W x D x H)	163 x 103 x 53 mm
Weight	976g
Power Requirement	12~48V DC, Redundant power with polarity reverse protection function
Power Consumption / Dissipation	4 Watts / 13 BTU
Installation	DIN rail kit and wall mount ear
ESD Protection	6KV DC
EFT Protection	6KV DC
LED Indicators	Power LED: <ul style="list-style-type: none"> • Power 1 / Power 2 / FAULT (Green) 10/100Base-TX Port (Port-1 to Port-8): <ul style="list-style-type: none"> • LNK/ACT (Green)
Network Cables	10Base-T: 2-Pair UTP Cat.3,4,5 up to 100m (328ft) 100Base-TX: 2-Pair UTP Cat.5, 5e, 6 up to 100m (328ft) EIA/TIA-568 100-ohm STP (100m, max.)
Switch Specification	
Switch Processing Scheme	Store-and-Forward
Address Table	2K entries
Flow Control	Back pressure for half duplex IEEE 802.3x Pause Frame for full duplex
Switch Fabric	1.6Gbps
Throughput (packet per second)	1.19Mpps@64Bytes
Maximum Transmit Unit	1536 bytes
Standards Conformance	
Standards Compliance	IEEE 802.3 Ethernet IEEE 802.3u Fast Ethernet IEEE 802.3x Full-Duplex Flow Control
Regulation Compliance	FCC Part 15 Class A, CE
Stability Testing	IEC60068-2-32 (Free fall) IEC60068-2-27 (Shock) IEC60068-2-6 (Vibration)
Environment	
Temperature	Operating: -40~75 Degree C Storage: -40~75 Degree C
Humidity	Operating: 5~95% (Non-condensing) Storage: 5~95% (Non-condensing)
Standard Accessories	
Packet Contents	1 x M12 4-Pin D-Coded Male connector to RJ-45 Ethernet cable, 1.2m 1 x M12 5-Pin A-Coded Female connector power cable, 1.2m 1 x Wall-Mount Kit 1 x DIN-Rail Kit (attached to M12 switch as default) 1 x User's Manual

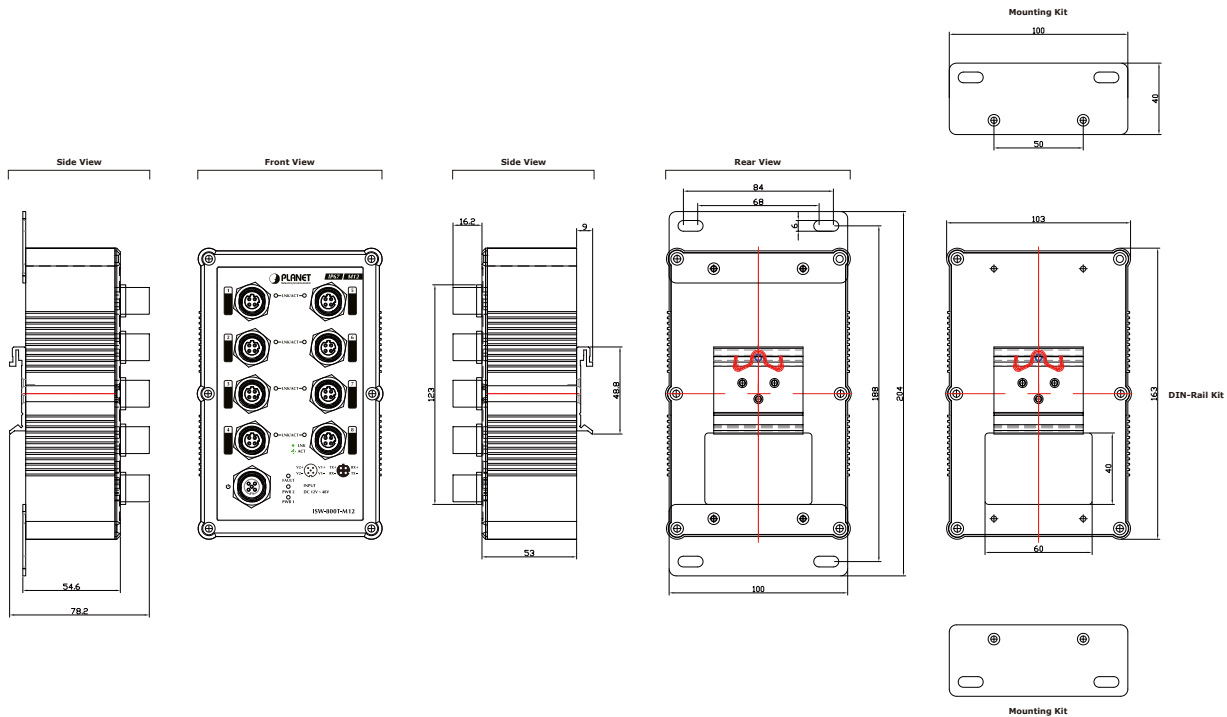

Dimensions (unit = mm)

ORDERING INFORMATION

ISW-800T-M12 Industrial IP67 Rated 8-Port 10/100Mbps M12 Ethernet Switch (-40~75 Degree C)

RELATED PRODUCTS

ISW-804PT-M12 Industrial IP67 Rated 8-Port 10/100Mbps M12 Ethernet Switch with 4-Port PoE (-40~75 Degree C)

ACCESSORIES

- CB-M12RJ** 4-Pin D-Coding M12 Male to RJ-45 Ethernet Cable, 1.2 meters
- CB-M12RJ-10** 4-Pin D-Coding M12 Male to RJ-45 Ethernet Cable, 10 meters
- CB-M12EXT-10** 4-Pin D-Coding M12 Male to D-Coding M12 Female Ethernet Cable, 10meters