


Industrial 8-Port 10/100/1000T Wall-mounted Managed Switch (-40~75 degrees C)



Easily-deployed and Expanded Network

Designed to be installed in a wall enclosure or simply mounted on a wall at any convenient location, PLANET WGS-4215-8T, an innovative, Industrial 8-Port 10/100/1000T Wall-mount Managed Switch, offers IPv6/IPv4 dual stack management, intelligent Layer 2 management function, and user-friendly interface. The WGS-4215-8T is able to operate reliably, stably and quietly in any environment without affecting its performance. Featuring ultra networking speed and operating temperature ranging from -40 to 75 degrees C in a compact but rugged IP30 metal housing, the WGS-4215-8T is an ideal solution to meeting the demand for the following network applications:

- Building/Home automation network
- Internet of things (IoT)
- IP surveillance
- Wireless LAN

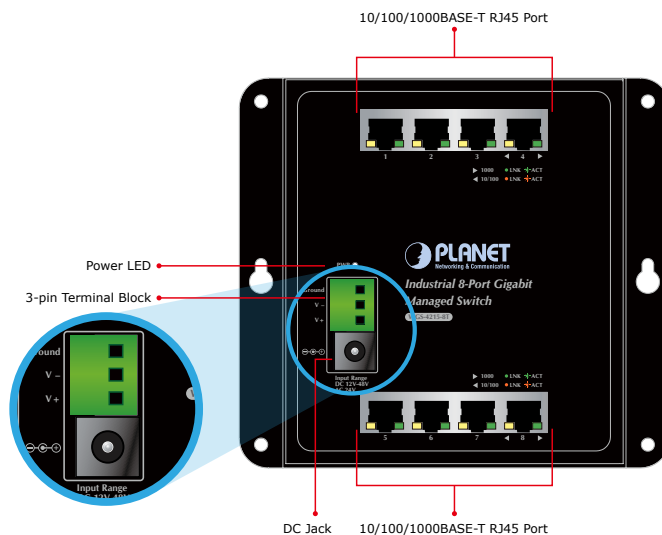

Physical Port

- 8-port 10/100/1000BASE-T Gigabit RJ45 copper

Industrial Case / Installation

- Compact size, wall-mounted, magnetic wall mount and DIN-rail design
- IP30 metal case protection
- Supports -40 to 75 degrees C operating temperature
- Supports ESD 8KV DC Ethernet protection
- Redundant power design
 - 12V~48V DC/24V AC wide power input

Switching

- Hardware based 10/100Mbps, half/full duplex and 1000Mbps full duplex mode, flow control and auto-negotiation and auto MDI/MDI-X
- Features Store-and-Forward mode with wire-speed filtering and forwarding rates
- IEEE 802.3x flow control for full duplex operation and back pressure for half duplex operation
- 8K MAC address table size
- 10K jumbo frame
- Automatic address learning and address aging
- Supports CSMA/CD protocol

Layer 2 Features

- Supports VLAN
 - IEEE 802.1Q tagged VLAN
 - Provider bridging (VLAN Q-in-Q, IEEE 802.1ad) support
 - Protocol VLAN
 - Voice VLAN
 - Private VLAN (Protected port)
 - Management VLAN
 - GVRP
- Supports Spanning Tree Protocol
 - STP (Spanning Tree Protocol)
 - RSTP (Rapid Spanning Tree Protocol)
 - MSTP (Multiple Spanning Tree Protocol)

Innovative Wall-mount Installation


The WGS-4215-8T is specially designed to be installed in a narrow environment, such as wall enclosure or electric weak box. The compact, flat and wall-mounted design fits easily in any space-limited location. It adopts the user-friendly “Front Access” design, making the installing, cable wiring, LED monitoring and maintenance of the WGS-4215-8T placed in an enclosure very convenient for technicians. The WGS-4215-8T can be installed by fixed wall mounting, magnetic wall mounting or DIN rail, thereby making its usability more flexible.



Dual Power Input for High Availability Network System

The WGS-4215-8T features a strong dual power input system (12V~48V DC or 24V AC) incorporated into customer’s automation network to enhance system reliability and uptime. In the example below, when the 3-pin terminal block fails to work, the hardware failover function will be activated automatically to keep powering the WGS-4215-8T via the DC plug power alternatively without any loss of operation.

Dual Power Input with Auto Failover

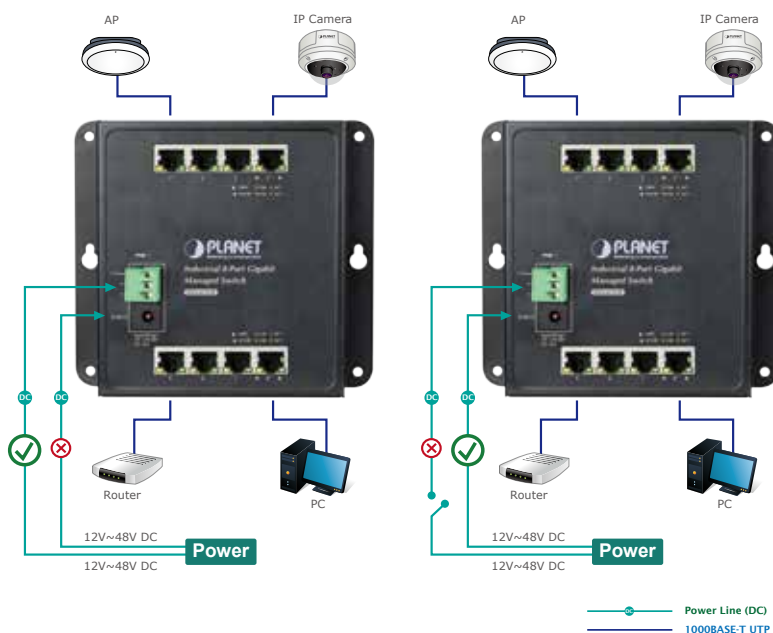

- STP BPDU Guard, BPDU Filtering and BPDU Forwarding
- Supports Link Aggregation
 - IEEE 802.3ad Link Aggregation Control Protocol (LACP)
 - Cisco ether-channel (static trunk)
 - Maximum 4 trunk groups, up to 8 ports per trunk group
- Provides port mirror (many-to-1)
- Loop protection to avoid broadcast loops

Quality of Service

- Ingress/Egress Rate Limit per port bandwidth control
- Traffic classification
 - IEEE 802.1p CoS
 - TOS/DSCP/IP precedence of IPv4/IPv6 packets
- Strict priority and Weighted Round Robin (WRR) CoS policies

Multicast

- Supports IPv4 IGMP snooping v2 and v3
- Supports IPv6 MLD snooping v1, v2
- IGMP querier mode support
- IGMP snooping port filtering
- MLD snooping port filtering

Security

- Storm Control support
 - Broadcast, unknown unicast and unknown multicast
- Authentication
 - IEEE 802.1X port-based network access authentication
 - Built-in RADIUS client to co-operate with the RADIUS servers
 - DHCP Option 82
 - RADIUS/TACACS+ authentication
- Access Control List
 - IPv4/IPv6 IP-based ACL
 - IPv4/IPv6 IP-based ACE
 - MAC-based ACL
 - MAC-based ACE
- MAC Security
 - Static MAC
 - MAC filtering
- Port security for source MAC address entries filtering
- DHCP snooping to filter distrusted DHCP messages
- Dynamic ARP inspection discards ARP packets with invalid MAC address to IP address binding
- IP source guard prevents IP spoofing attacks
- DoS attack prevention
- SSH and SSL

Environmentally Hardened Design


With IP30, flat but rugged metal housing protection, the WGS-4215-8T provides a high level of immunity against electromagnetic interference and heavy electrical surges which are usually found on plant floors or in curb-side traffic control cabinets without air conditioner. Being able to operate under the temperature range from -40 to 75 degrees C, the WGS-4215-8T can be placed in almost any difficult environment.

IPv6/IPv4 Dual Stack Management

Supporting both IPv6 and IPv4 protocols, the WGS-4215-8T helps the SMBs to step in the IPv6 era with the lowest investment as its network facilities need not be replaced or overhauled if the IPv6 FTTx edge network is set up.

Robust Layer 2 Features

The WGS-4215-8T can be programmed for advanced switch management functions such as dynamic port link aggregation, 802.1Q VLAN, Q-in-Q VLAN, Multiple Spanning Tree Protocol (MSTP), Loop and BPDU Guard, IGMP Snooping, and MLD Snooping. Via the link aggregation, the WGS-4215-8T allows the operation of a high-speed trunk to combine with multiple ports such as a 16Gbps fat pipe, and supports fail-over as well. Also, the Link Layer Discovery Protocol (LLDP) is the Layer 2 protocol included to help discover basic information about neighboring devices on the local broadcast domain.

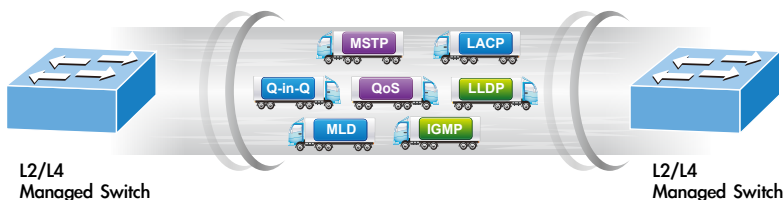

Efficient Traffic Control

The WGS-4215-8T is loaded with robust QoS features and powerful traffic management to enhance services to business-class data, voice, and video solutions. The functionality includes broadcast/multicast/unicast storm control, per port bandwidth control, 802.1p/CoS/IP DSCP QoS priority and remarking. It guarantees the best performance at VoIP and video stream transmission, and empowers the enterprises to take full advantage of the limited network resources.

Friendly and Secure Management

For efficient management, the WGS-4215-8T is equipped with web, Telnet and SNMP management interfaces. With the built-in web-based management interface, the WGS-4215-8T offers an easy-to-use, platform-independent management and configuration facility. By supporting the standard SNMP, the switch can be managed via any standard management software. For text-based management, the switch can be accessed via Telnet. Moreover, the WGS-4215-8T offers secure remote management by supporting SSH, SSL and SNMP v3 connections which encrypt the packet content at each session.

Management

- IPv4 and IPv6 dual stack management
- Switch Management Interface
 - IPv4/IPv6 Web switch management
 - Telnet Command Line Interface
 - SNMP v1, v2c and v3
 - SSH and SSL secure access
- User privilege levels control
- Built-in Trivial File Transfer Protocol (TFTP) client
- Static and DHCP for IP address assignment
- System Maintenance
 - Firmware upload/download via HTTP and TFTP
 - Configuration upload/download through HTTP and TFTP
 - Hardware reset button for system reboot or reset to factory default
- SNTP Network Time Protocol
- Cable diagnostics
- Link Layer Discovery Protocol (LLDP) Protocol and LLDP-MED
- SNMP trap for interface Link Up and Link Down notification
- Event message logging to remote Syslog server
- Four RMON groups (history, statistics, alarms and events)
- PLANET Smart Discovery Utility

Advanced Network Security

PLANET WGS-4215-8T offers a comprehensive IPv4/IPv6 Layer 2 to Layer 4 Access Control List (ACL) for enforcing security to the edge. Its protection mechanism also comprises 802.1X port-based user and device authentication, which can be deployed with RADIUS to ensure the port level security and block illegal users. With the protected port function, communication between edge ports can be prevented to guarantee user privacy.

Furthermore, the WGS-4215-8T also provides DHCP snooping, IP source guard and dynamic ARP inspection functions to prevent IP snooping from attack and discarded ARP packets with invalid MAC address. The network administrators can now construct highly-secure corporate networks with considerably less time and effort than before.


Ready to Go with IoT Generation

Internet is very popular the world over as users surf online daily with their mobile devices, such as smart phones, tablets, or laptop computers. However, users expect more from the convenience of Internet, like how to use their mobile devices to control something via the Internet, thus making life more convenient. The WGS-4215-8T is based on such concept to help users implement the Internet of things (IoT) on the SOHO/Home network. Home automation is no longer a dream as Gigabit network can easily cloud IoT equipment, making it a smart home.

Applications

Security Building Automation Switch

Suitable for buildings where security is strictly to be enforced, the WGS-4215-8T Industrial Wall-mount Managed Switch offers a comprehensive Layer 2 to Layer 4 Access Control List (ACL). The switch can restrict network access by denying packets based on source and destination IP address, TCP/UDP ports or defined typical network applications. With the WGS-4215-8T, a tightly-controlled network can be easily had in no time.

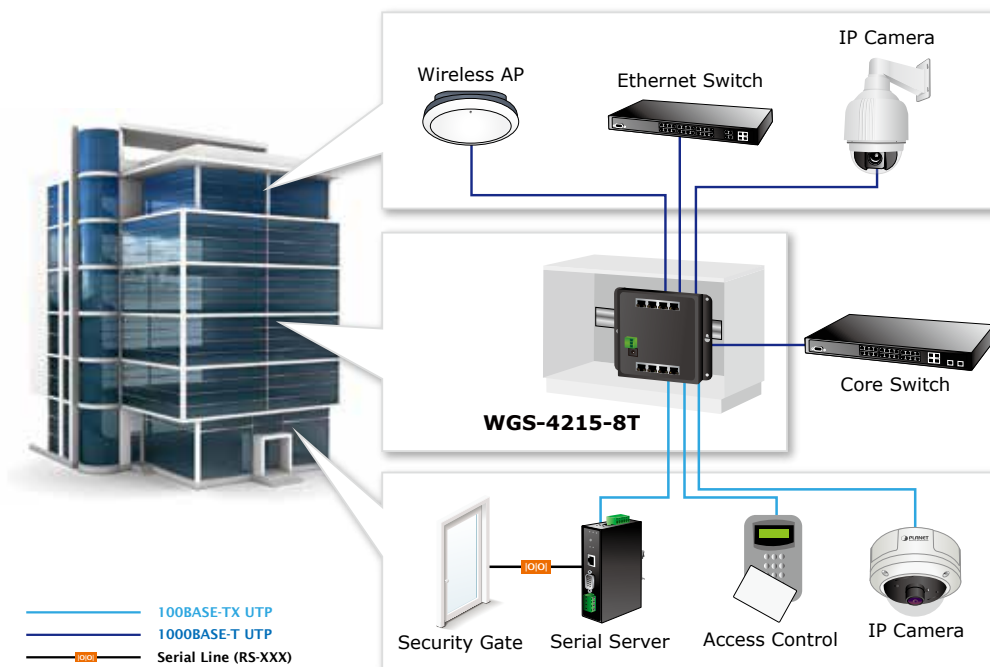

Industrial Area Switch for Data Collection and Forwarding

The WGS-4215-8T is equipped with 8 10/100/1000Mbps ports offering auto MDI/MDIX feature providing 16Gbps non-blocking switch fabric and the 8K MAC address table so that the WGS-4215-8T can perform wire-speed packets transfer without the risk of packet loss. The WGS-4215-8T with the slim type IP30 metal case is ideal for most heavy industrial demanding environments.



Robotic Automation System

1000BASE-T UTP

Specifications

Model	WGS-4215-8T
Hardware Specifications	
Copper Ports	8-Port 10/100/1000BASE-T RJ45 auto-MDI/MDI-X ports
Switch Architecture	Store-and-Forward
Switch Fabric	16Gbps/non-blocking
Switch Throughput@64 bytes	11.9Mpps @64 bytes
MAC Address Table	8K entries
Shared Data Buffer	4.1 megabits
Flow Control	IEEE 802.3x pause frame for full-duplex Back pressure for half-duplex
Jumbo Frame	10 Kbytes
Reset Button	< 5 sec: System reboot > 5 sec: Factory default
LED	Power LED: Power (Green) 10/100/1000BASE-TX Port: 10/100 LNK/ACT (Orange) 1000 LNK/ACT (Green)
Connector	<ul style="list-style-type: none"> Removable 3-pin terminal block for power input <ul style="list-style-type: none"> Pin 1/2 for power (Pin 1: V+ / Pin 2: V-) Pin 3 for earth ground DC power jack with 2.0mm central pole
Power Requirements	24V AC, 1A (max.) 12~48V DC, 1A (max.)
Power Consumption/ Dissipation	Max. 7 watts/24 BTU
Dimensions (W x D x H)	148 x 25 x 134 mm
Weight	496g
ESD Protection	Contact Discharge 4KV DC Air Discharge 8KV DC
Enclosure	Metal
Installation	Wall mount, magnetic wall mount and DIN-rail kit
Layer 2 Functions	
Port Mirroring	TX/RX/Both Many-to-1 monitor
VLAN	802.1Q tagged-based VLAN Up to 256 VLAN groups, out of 4094 VLAN IDs 802.1ad Q-in-Q tunneling (VLAN stacking) Voice VLAN Protocol VLAN Private VLAN (Protected port) GVRP Management VLAN
Link Aggregation	IEEE 802.3ad LACP and static trunk Supports 4 groups with 4 ports per trunk
Spanning Tree Protocol	STP, IEEE 802.1D Spanning Tree Protocol RSTP, IEEE 802.1w Rapid Spanning Tree Protocol MSTP, IEEE 802.1s Multiple Spanning Tree Protocol STP BPDU Guard, BPDU Filtering and BPDU Forwarding
IGMP Snooping	IPv4 IGMP (v2/v3) snooping IGMP querier Up to 256 multicast groups
MLD Snooping	IPv6 MLD (v1/v2) snooping, up to 256 multicast groups
Access Control List	IPv4/IPv6 IP-based ACL and MAC-based ACL IPv4/IPv6 IP-based ACE and MAC-based ACE
QoS	8 mapping ID to 8 level priority queues <ul style="list-style-type: none"> Port Number 802.1p priority DSCP/IP precedence of IPv4/IPv6 packets Traffic classification based, strict priority and WRR Ingress and Egress Rate Limit per port bandwidth control
Security	IEEE 802.1X port-based authentication Built-in RADIUS client to co-operate with RADIUS server RADIUS/TACACS+ authentication IP-MAC port binding MAC filtering Static MAC address DHCP snooping and DHCP Option82 STP BPDU guard, BPDU filtering and BPDU forwarding DoS attack prevention ARP inspection IP source guard Storm control support <ul style="list-style-type: none"> Broadcast, unknown unicast and unknown multicast

Management Functions

Basic Management Interfaces	<p>Web browser, Telnet and SNMP v1, v2c, v3 Firmware upgrade by HTTP and TFTP protocol through Ethernet network Configuration upload/download through HTTP and TFTP Remote and Local Syslog System log LLDP protocol SNTP PLANET Smart Discovery Utility</p>
Secure Management Interfaces	<p>SSH, SSL, SNMP v3</p>
SNMP MIBs	<p>RFC 1213 MIB-II RFC 1215 Generic Traps RFC 1493 Bridge MIB RFC 2674 Bridge MIB Extensions RFC 2737 Entity MIB (Version 2) RFC 2819 RMON (1, 2, 3, 9) RFC 2863 Interface Group MIB RFC 3635 Ethernet-like MIB</p>

Standards Conformance

Regulatory Compliance	<p>FCC Part 15 Class A, CE</p>
Stability Testing	<p>IEC 60068-2-32 (free fall) IEC 60068-2-27 (shock) IEC 60068-2-6 (vibration)</p>
Standards Compliance	<p>IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX/100BASE-FX IEEE 802.3z Gigabit SX/LX IEEE 802.3ab Gigabit 1000BASE-T IEEE 802.3x Flow Control and Back Pressure IEEE 802.3ad Port Trunk with LACP IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1s Multiple Spanning Tree Protocol IEEE 802.1p Class of Service IEEE 802.1Q VLAN Tagging IEEE 802.1x Port Authentication Network Control IEEE 802.1ab LLDP RFC 768 UDP RFC 793 TFTP RFC 791 IP RFC 792 ICMP RFC 2068 HTTP RFC 1112 IGMP v1 RFC 2236 IGMP v2 RFC 3376 IGMP v3 RFC 2710 MLD v1 RFC 3810 MLD v2</p>


Standards Conformance

Operating	<p>Temperature: -40 ~ 75 degrees C Relative Humidity: 5 ~ 95% (non-condensing)</p>
Storage	<p>Temperature: -40 ~ 85 degrees C Relative Humidity: 5 ~ 95% (non-condensing)</p>

Accessories

Standard Accessories	<ul style="list-style-type: none"> • Quick Installation Guide x 1 • 3-pin Terminal Block Connector x 1 • Wall-mounted Kit x 1 • DIN-rail Kit x 1 • Magnet Kit x 1 • RJ45 Dust Cap x 8 • SFP Dust Cap x 2
----------------------	---

Drawing

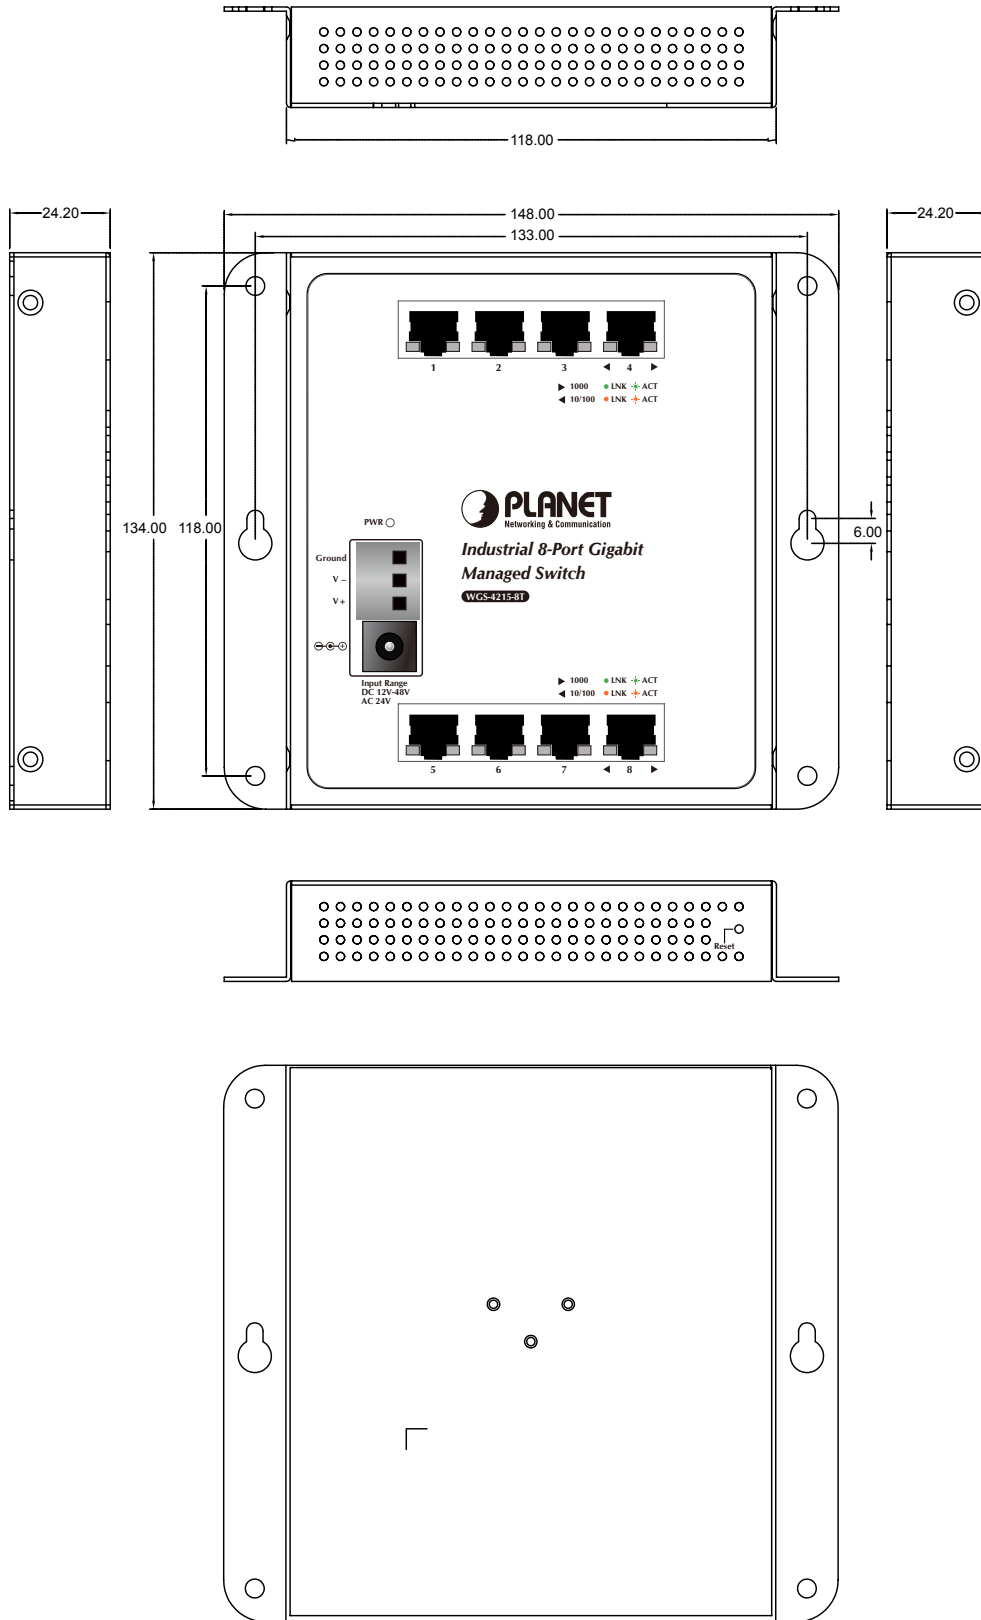

Dimensions (unit = mm)

Ordering Information

WGS-4215-8T	Industrial 8-Port 10/100/1000T Wall-mount Managed Switch (-40~75 degrees C)
-------------	---

Accessories

PWR-40-24	40W 24V DC Single Output Industrial DIN-rail Power Supply (-20 ~ 70 degrees C)
PWR-60-24	60W 24V DC Single Output Industrial DIN-rail Power Supply (-20 ~ 70 degrees C)
PWR-75-24	75W 24V DC Single Output Industrial DIN-rail Power Supply (-10 ~ 60 degrees C)

Related Products

WGS-4215-8T2S	Industrial 8-Port 10/100/1000T + 2-Port 100/1000X SFP Wall-mount Managed Switch (-40~75 degrees C)
WGS-803	Industrial 8-Port 10/100/1000T Wall-mounted Gigabit Ethernet Switch (-10~60 degrees C)
WGS-804HP	Industrial 8-Port 10/100/1000T Wall-mounted Gigabit Ethernet Switch with 4-Port PoE+ (-10~60 degrees C)

PLANET Technology Corporation

11F., No.96, Minquan Rd., Xindian Dist., New Taipei City
231, Taiwan (R.O.C.)

Tel: 886-2-2219-9518

Email: sales@planet.com.tw

Fax: 886-2-2219-9528

www.planet.com.tw



PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2015 PLANET Technology Corp. All rights reserved.

WGS-4215-8T