


SDS02 SDH02 SERIES

DC-DC CONVERTER

2:1 WIDE INPUT RANGE
UP TO 2.01 WATTS

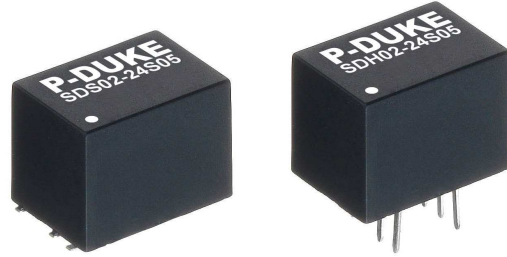

FEATURES

- ULTRA SMALL SMD AND DIP PACKAGE, 0.52 x 0.36x 0.40 INCH WITH REGULATED
- SMD PACKAGE QUALIFIED FOR LEADFREE REFLOW SOLDER PROCESS ACCORDING IPC J-STD-020D
- NO MINIMUM LOAD REQUIRED
- CONTINUOUS SHORT CIRCUIT PROTECTION
- 1600VDC INPUT TO OUTPUT ISOLATION AND 3000VDC FOR OPTION
- SAFETY MEETS UL60950-1, EN60950-1, & IEC60950-1
- CE MARKED
- COMPLIANT TO RoHS II & REACH

APPLICATIONS

- WIRELESS NETWORK
- TELECOM/DATACOM
- INDUSTRY CONTROL SYSTEM
- MEASUREMENT EQUIPMENT
- SEMICONDUCTOR EQUIPMENT

TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	µF
SDS(H)02-05S3P3	4.5 ~ 9	3.3	500	34	77	2200
SDS(H)02-05S05	4.5 ~ 9	5	400	34	81	1000
SDS(H)02-05S12	4.5 ~ 9	12	167	42	84	550
SDS(H)02-05S15	4.5 ~ 9	15	134	42	85	440
SDS(H)02-05S24	4.5 ~ 9	24	83	42	85	200
SDS(H)02-05D05	4.5 ~ 9	±5	±200	42	81	±660
SDS(H)02-05D12	4.5 ~ 9	±12	±83	42	85	±330
SDS(H)02-05D15	4.5 ~ 9	±15	±67	42	85	±220
SDS(H)02-12S3P3	9 ~ 18	3.3	500	24	78	2200
SDS(H)02-12S05	9 ~ 18	5	400	24	81	1000
SDS(H)02-12S12	9 ~ 18	12	167	28	84	550
SDS(H)02-12S15	9 ~ 18	15	134	28	85	440
SDS(H)02-12S24	9 ~ 18	24	83	28	85	200
SDS(H)02-12D05	9 ~ 18	±5	±200	28	81	±660
SDS(H)02-12D12	9 ~ 18	±12	±83	28	85	±330
SDS(H)02-12D15	9 ~ 18	±15	±67	28	86	±220
SDS(H)02-24S3P3	18 ~ 36	3.3	500	10	78	2200
SDS(H)02-24S05	18 ~ 36	5	400	10	81	1000
SDS(H)02-24S12	18 ~ 36	12	167	14	84	550
SDS(H)02-24S15	18 ~ 36	15	134	14	85	440
SDS(H)02-24S24	18 ~ 36	24	83	14	85	200
SDS(H)02-24D05	18 ~ 36	±5	±200	14	81	±660
SDS(H)02-24D12	18 ~ 36	±12	±83	14	85	±330
SDS(H)02-24D15	18 ~ 36	±15	±67	14	86	±220
SDS(H)02-48S3P3	36 ~ 75	3.3	500	7	77	2200
SDS(H)02-48S05	36 ~ 75	5	400	7	81	1000
SDS(H)02-48S12	36 ~ 75	12	167	8	84	550
SDS(H)02-48S15	36 ~ 75	15	134	8	85	440
SDS(H)02-48S24	36 ~ 75	24	83	8	85	200
SDS(H)02-48D05	36 ~ 75	±5	±200	8	81	±660
SDS(H)02-48D12	36 ~ 75	±12	±83	8	85	±330
SDS(H)02-48D15	36 ~ 75	±15	±67	8	85	±220

GENERAL SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	Standard Suffix "H"	1600			VDC
Isolation resistance	500VDC		3000			GΩ
Isolation capacitance		Standard Suffix "H"			50 50	pF
Switching frequency			100			kHz
Safety meets						UL60950-1 EN60950-1 IEC60950-1
Case material						Non-conductive black plastic
Base material						Non-conductive black plastic
Potting material						Silicone (UL94 V-0)
Weight						2.7g (0.10oz)
MTBF	MIL-HDBK-217F, Full load					6.670 x 10 ⁶ hrs

ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	Without derating	-40		85	°C
Storage temperature range		-55		+125	°C
Thermal shock					MIL-STD-810F
Vibration					MIL-STD-810F
Relative humidity					5% to 95% RH
Lead-free reflow solder process					IPC J-STD-020D
Moisture sensitivity level(MSL)					IPC J-STD-033B Level 2

EMC SPECIFICATIONS


Parameter	Conditions	Level
EMI (1)	EN55022	Class A, Class B
ESD	EN61000-4-2 Air ± 8kV Contact ± 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3 10 V/m	Perf. Criteria A
Fast transient (2)	EN61000-4-4 ± 2kV	Perf. Criteria A
Surge (2)	EN61000-4-5 ± 1kV	Perf. Criteria A
Conducted immunity	EN61000-4-6 10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8 100A/m continuous; 1000A/m 1 second	Perf. Criteria A

Note:


- The standard module meets EMI Class A or Class B and input reflected ripple current only with external components. For further information, please contact with P-DUKE.
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5. The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220 μF/100V.

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

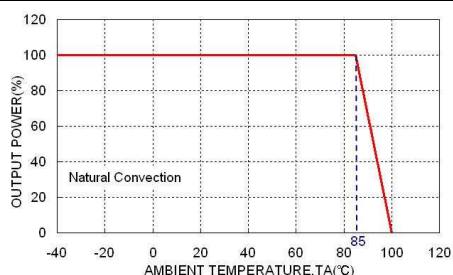


SDS(H)02-48S05 Derating Curve

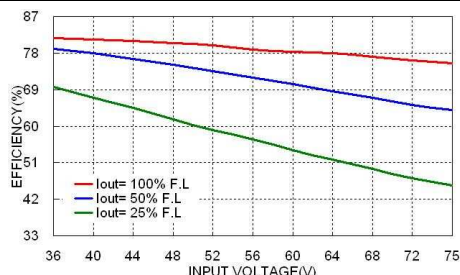

SDS(H)02-48S05 Efficiency vs. Input Voltage

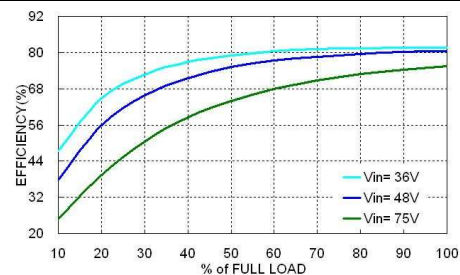

SDS(H)02-48S05 Efficiency vs. Output Current

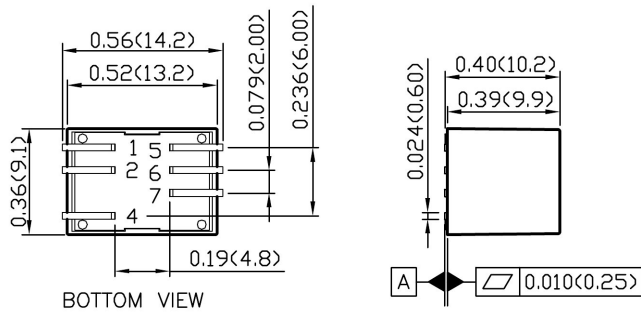MECHANICAL DRAWING
SDS02

PIN CONNECTION

PIN	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
4	Ctrl	Ctrl
5	NC	-Vout
6	-Vout	Common
7	+Vout	+Vout

- All dimensions in inch (mm)
- Tolerance :x.xx±0.02 (x.xx±0.5)
x.xxx±0.01 (x.xx±0.25)
- Pin pitch tolerance ±0.01 (0.25)
- Pin dimension tolerance ±0.004(0.1)

SDH02
