


ADSTS116- Automatic Transfer Switch

Features:

- 16A max. input current
- Powered by two separately independent power sources
- Dual power supply for redundancy
- Provides seamless power switch for IT equipment
- Preferred source selection in front panel
- Highly reliability 19" rack design (1U) to fit into a diverse Working environment
- SNMP interface- Optional
- Built-in USB and RS-232 communication

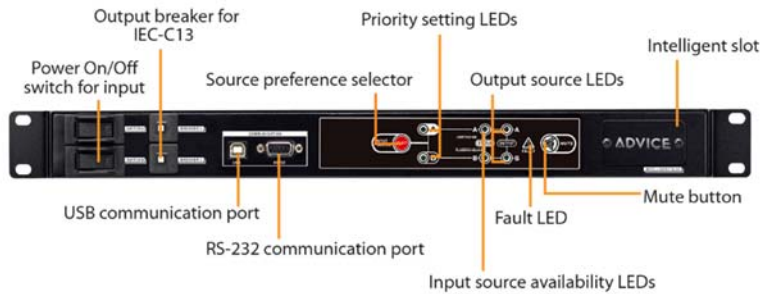

Specifications

Model	ADSTS116
Input	
Input voltage	220/230/240 VAC
Acceptable input voltage	180-258 VAC
Input frequency	50Hz / 60Hz
Maximum input current	16A
Output	
Output voltage	220 / 230 / 240 VAC
Maximum output current	10 A for ICE-C13 outlets 16 A for IEC-C19 outlet
Connection	
Input	2 x IEC- C20 inlets
Output	8 x IEC-C13 1 x IEC-C19
Communication	USB / RS-232
Transfer time	9-12 ms
Physical	
Dimention DxWxH (mm)	330 x 483 x 44
Net weight (kgs)	5
Net weight (including accessories) (kgs)	8
Environment	
Operating temperature	20-95% RH @ -5-45°C (Non condensing)

* Product specifications are subject to change without further notice