


Medical High Density

AMSL40

Features:

- Single output
- 3 x 2 x 0.75 Inches
- 40W Convection-cooled
- -40° to 70°C operating temperature
- PCB mounting option
- Class I & II ** options
- IEC 60601-1 (3rd Ed);am1, ANS/AAMI ES60601-1
- EN 60601-1-2:2015 (IEC 60601-1-2:2014 4th Ed.)

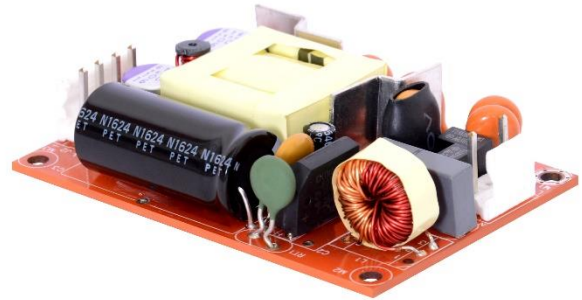

Specifications

Model No.	Voltage (V)	Load (A)	Efficiency (%)	Leakge Current(μ A)	No-Load power (W)
AMSL40-5	5	5	80	<300	<0.3
AMSL40-12	12	3.33	85	<300	<0.3
AMSL40-15	15	2.67	85	<300	<0.3
AMSL40-24	24	1.67	87	<300	<0.3
AMSL40-48	48	0.83	87	<300	<0.3
AMSL40-58	58	0.7	87	<300	<0.3

* Product specifications are subject to change without further notice