


RONDA slimtech 1000

Extra small and slim movements
for exclusive styles

Caliber 1069 – 6³/₄ x 8'''

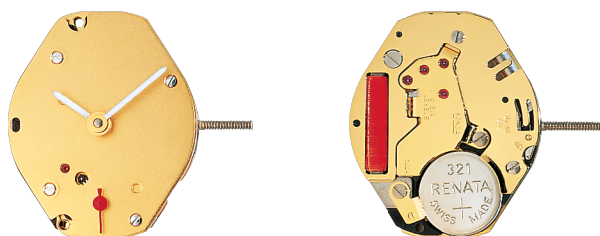



Product Specifications

Analog quartz movement


Line	slimtech
Caliber	1069
Size	6 ³ / ₄ x 8'''
Version	Swiss Made Swiss Parts
	6 Jewels / gold plated 2 Jewels / nickel plated
Standard battery life	25 months
High battery life	34 months
Hand fitting height	1

Features


- Repairable metal watch movement
- Power saving mechanism with pulled out stem: Reduction of consumption approximately 70%
- Remote sweep second for men - at 6.3 mm from the center



6 3/4 x 8'''



1062



1063



6 3/4 x 8'''



1064



1069

1. Werkdimensionen

1. Dimensions mouvem.

1. Movement dims.



Kaliber Calibre Caliber	Total	Werksitz Encageage Case fitting	Werkhöhe Hauteur mouvement Movement height	Höhe Batterie Hauteur pile Height of battery	Höhe Stellwelle Hauteur tige Height of stem	Höhe Werkauflage Hauteur filet Movement rest
Einh./ Unité/ Unit	mm	mm	mm	mm	mm	mm
1062/1063/1064	15,30 x 18,20	15,30 x 17,80	1,90	1,95	0,75	0,40
1069	15,30 x 18,20	15,30 x 17,80	2,30	2,35	1,15	0,40
Stellwellengewinde / Filetage de la tige / Stem thread: Ø 0,90 mm					Weg / Chemin / Length of travel: 0,35 mm	

2. Funktionen

2. Fonctions

2. Functions

Kaliber Calibre Caliber	Stellwellenpos. Pos. de tige Stem position	Funktionen Fonctions Functions
1062	1	Normale Position / Position normale / Running position Zeiger stellen, mit Unterbruch der Motorimpulse
	2	Mise à l'heure, avec interruption des impulsions moteur Hand setting, with interruption of motor pulses
1063 1064 1069	1	Normale Position / Position normale / Running position Zeiger stellen, Sekunden-Stopp mit Unterbruch der Motorimpulse
	2	Mise à l'heure, stop-seconde avec interruption des impulsions moteur Hand setting, stop-second with interruption of motor pulses



3. Leistungen

3. Performances

3. Performances

Kaliber Calibre Caliber	Bedingungen Conditions Conditions	Momentaner Gang March instantanée Instantaneous rate	Drehmoment Couple utile Torque	Gangreserve Autonomie Autonomy
	Einheit / Unité / Unit Typ. Wert / Valeur / Value	(s/month)	(µNm) typ. sec. min.	(m = Monat/mois/month) (y = Jahr/année/years)
1062	1,55 V 23°C Batt. / Pile 15 mAh	- 10/+ 20	- 32	6 y
1063/1064/ 1069	1,55 V 23°C Batt. / Pile 15 mAh	- 10/+ 20	5 250	25 m
Magnetfeldabschirmung / Résist. aus champs magn. / Resist. to magnetic fields			18,8 Oe 1500 A/M	
Betriebstemperatur / Température d'opération / Operating temperature			0-50°C	
Schockresistenz / Résistance au choc / Shock resistance			NIHS 91-10	