





## OPERATING INSTRUCTIONS FOR TALOS DIMPLE


Supplier of Draft Beer Dispensing Equipment and System Solutions

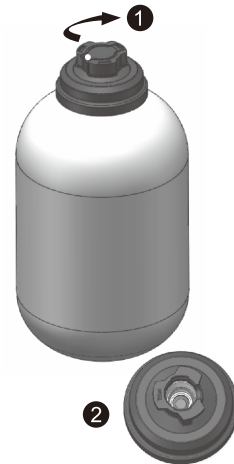


1. Remove the keg's dust-proof cap
2. Disinfect the keg head with alcohol

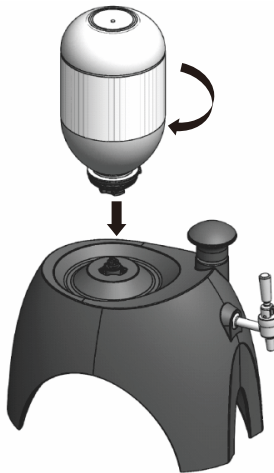


3. Connect the keg upside down to the Dimple and screw clockwise to lock the keg. (Note: If the O-ring on the probe of drinking stool is damaged, please replace it in time)

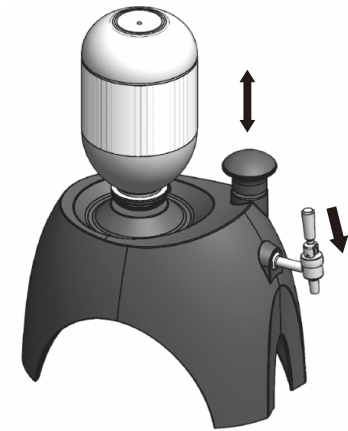

4. Use the built-in manual pump to supplement the pressure in the keg
5. Turn on the tap for pouring, pressure in the keg can be supplemented by pumping the manual pump
6. Screw counterclockwise to remove the keg when it is empty

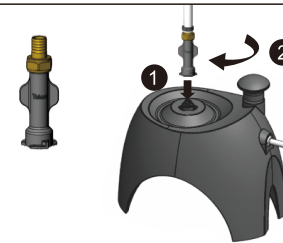

7. Connect the cleaning head to the Dimple, screw clockwise to tighten the cleaning head, then connect to the clean water or Cleaning Fluid



8. Start cleaning the beer tube and keep for more than 2 minutes, until the liquid from the tap is clear and no smell
9. After the cleaning is completed, screw counterclockwise to remove the cleaning head

Model:1119203  
Body Material:ABS  
Available Keg:Talos- 3L/5L/10L Keg  
N.W Unit(LBS):3.0 LBS  
Unit Dimension:15-1/2" Lx9-5/8" Wx12-1/2" H

