



Raytek

Raytek Ranger


Pine Item #

DESCRIPTION:

Handheld and portable, the Raytek STProPlus IR (infrared) thermometer measures surface temperatures, helping to quickly locate potential blockages or malfunctioning systems.

FEATURES:

- 1% accuracy
- Extra Bright Laser Point Sighting
- Adjustable emissivity
- MAX, MIN, DIF and AVG temperature display
- Large, easy to read display with 7-second hold

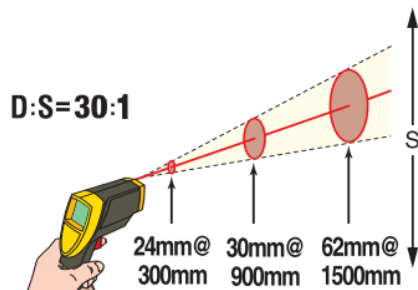

Contact a Pine branch near you to request a quote or place an order

VISIT OUR U.S. AND CANADA WEBSITES TO FIND A BRANCH NEAR YOU

United States

www.pine-environmental.com

Canada

www.pine-environmental.ca

Product Specifications

Temperature Range	-32 to 600°C
Accuracy (assumes ambient operating temperature of 23°C ±5K)	For targets at -32 to -26°C: ±3°C For targets at -26 to -18°C: ±2.5°C For targets at -18 to 23°C : ±2°C For targets above 23°C: ±1% of reading or ±1°C, whichever is greater
Repeatability	±0.5% or ≤ ±1°C, whichever is greater
Response Time	≤ 0.5 second (95% of reading)
Emissivity	Digitally adjustable emissivity (from 0.1 to 1.0 by 0.01)
Laser Sighting (Class II)	Offset single-point laser
Dimensions	US: 78.7 x 63 x 21.7. Metric: 200 x 160 x 55 mm
Weight	US: 0.7 lb. Metric: 320 g



Video:
<https://youtu.be/jHuOAtP-mtQs>

Local Delivery Pick-up

In-Stock Equipment

Repair & Calibration

Rental Protection Plan