



Project	
Notes	
Type	Date
Cat. No.	

**ABH™ Series** Architectural LED Bulkhead



**DESCRIPTION**

The ABH Architectural Bulkhead combine high-performance LEDs, a weather resistant aluminum housing along with a frosted white high impact diffuser for uniform illumination.

**Specification Features**

**Construction**

Rugged die cast aluminum housing withstands outdoor environments. Outer surface treated with durable power coating to provide resistance to corrosion, rust, weathering, and or degradation. Performance engineered internal heat dissipation fins provide superior thermal management for LED life and reliability. Lens design and materials provide uniform appearance without pixelation.

**Qualifications**

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Wet location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards.

**Warranty**

5-year Limited Warranty. See warranty documentation for more information.

**Electrical**

120V Driver operates at 60Hz

**Installation**

Designed for mounting on 4" electrical J-Box.



ABH Series
13-13W (1300 Lumens)
26- 26W (2400 Lumens)

Rated Life 60,000 hours
Limited Warranty 5-years
Efficacy Up to 100 LPW

Quick ship  
Made to order only

**Ordering Information**

Example: ABH-13-120-830

ABH	13	120	8	30		
<b>Series</b>	<b>Rated Wattage</b>	<b>Driver Type</b>	<b>CRI</b>	<b>Color Temp</b>		
ABH Architectural LED Bulkhead	13-13W (1300 Lumens) <sup>1</sup> 26- 26W (2400 Lumens)	120-120V <sup>1</sup>	8 80+ CRI	30 3000K <sup>1</sup> 40 4000K <sup>1</sup>		

Specifications and Dimensions subject to change without notice.

Performance Summary

Input Voltage	120V
Input Frequency	60 Hz
Rated Wattage	See Performance Table
Delivered Lumens	See Performance Table
Efficacy	> 100 LPW (typ.)
CRI	83+, R9 > 0
Available CCT <sup>1</sup>	3000K, 4000K
Color Consistency <sup>2</sup>	5-step MacAdam Ellipse
Rated Life	60,000 hours
L70 <sup>3</sup>	> 72,000 hours or > 45,000
Power Factor	> 0.9
THD	< 20%
Dimming	N/A
Operating Temp.	-18°C to 40°C

Performance Data

Lens Type	Form Factor	Catalog No.	Rated Wattage (W)	Delivered Lumens	Efficacy (lm/W)
None	11"	<a href="#">ABH-13-120-830</a>	13	1300	100
	11"	<a href="#">ABH-26-120-830</a>	26	2400	92.3

NOTES:


- <sup>1</sup> Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.
- <sup>2</sup> DLC Listed
- <sup>3</sup> DLC Premium Listed
- <sup>4</sup> Quick ship: Made To order Only
- <sup>5</sup> Typical color consistency. May vary or be changed.
- <sup>6</sup> L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact manufacturer for detailed information
- <sup>7</sup> Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications and Dimensions subject to change without notice.



Product Dimensions

ABH

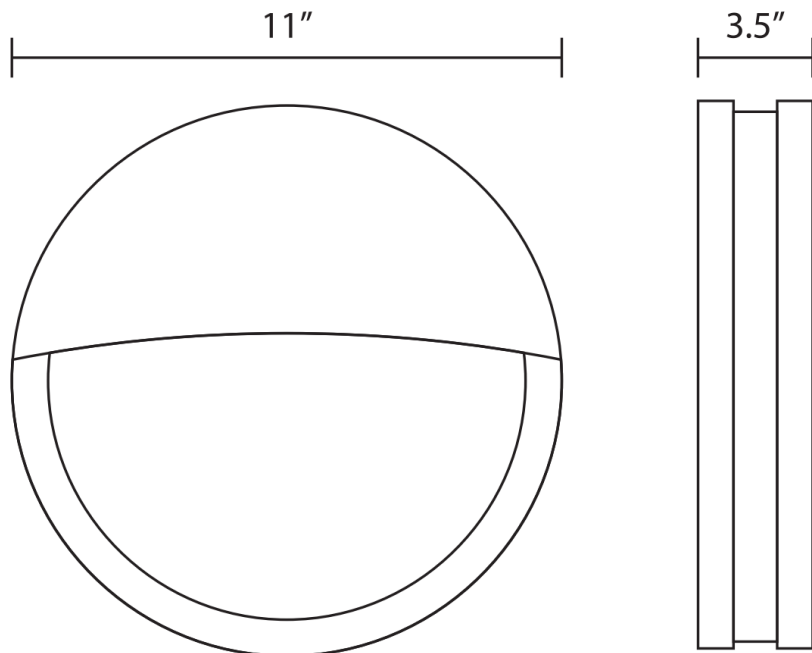

© 2019 GlobalLux Lighting, LLC. All rights reserved. For informational purposes only. Reproduction in whole or part is prohibited without prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequences of its use. GlobalLux Lighting reserves the rights make changes in specification at any time without notice.

**GlobalLux Lighting LLC**  
www.globalluxlighting.com  
2037 S. Vineyard Ave  
Ontario, CA 91761  
Ph: 909-591-7506