



Project	
Notes	
Type	Date
Cat. No.	

**AXS™ Series**

**LED Aluminum Exit Sign**



**APPLICATIONS**

The AXS Die Cast Aluminum Exits are designed to combine both beauty and performance while maintaining optimal energy efficiency with bright, uniform illumination. Ideal for applications requiring general purpose emergency lighting exit sign.

**AXS Series**



Limited Warranty 5-years

Quick Ship

Made to order only

**Specification Features**

**Construction**

Premium-grade, die-cast aluminum housing ( also available for in optional black or white powder-coated finishes). Field selectable knockout Chevron directional indicators. Quick-snap face plate closure. Unique design allows double face conversion in the field.

**Qualifications**

Meets UL924, NFPA 11 life safety Code, NEC, OSHA Local and State Codes. UL listed for damp locations ( 0° C - 50° C ).

**Warranty**

5-year Limited Warranty on all electronics and housing. Battery pro rated for 5 years.

**Electrical**

Dual 120/277 voltage. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. 4.8V long-life, maintenance - free, rechargeable NiCad battery. Internal solid-state transfer switch automatically connects the internal battery to the LED lamp head for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

**Installation**

Universal mounting pattern knock-out in back plate for J-Box mounting. EZ-snap thermoplastic mounting canopy included provides top or end mount.

**Ordering Information**

Example: AXS-1-W-R-A-EM

AXS	1	R	G	A	EM	
<b>Series</b> AXS Aluminum Exit Sign	<b>Faces</b> 1	<b>Housing Color</b> B- Black W- White	<b>Lettering</b> R - Red G - Green A- Aluminum	<b>Face Panel</b> A-Aluminum R- Red G- Green	<b>Battery</b> EM- Battery Backup AC - AC only	

Specifications and Dimensions subject to change without notice.

**Performance Summary**

Input Voltage	120V/277V
Input Frequency	50/60 Hz
Rated Wattage	See Performance Table
Operating Temp.	-18°C to 40°C

**Performance Data**

Lens Type	Form Factor	Catalog No.	Rated Wattage (W)
None		AXS-1-W-R-A-EM	1

NOTES:


- <sup>1</sup> Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.
- <sup>2</sup> Typical color consistency. May vary or be changed.
- <sup>3</sup> Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.



Specifications and Dimensions subject to change without notice.

## Product Dimensions

AXS

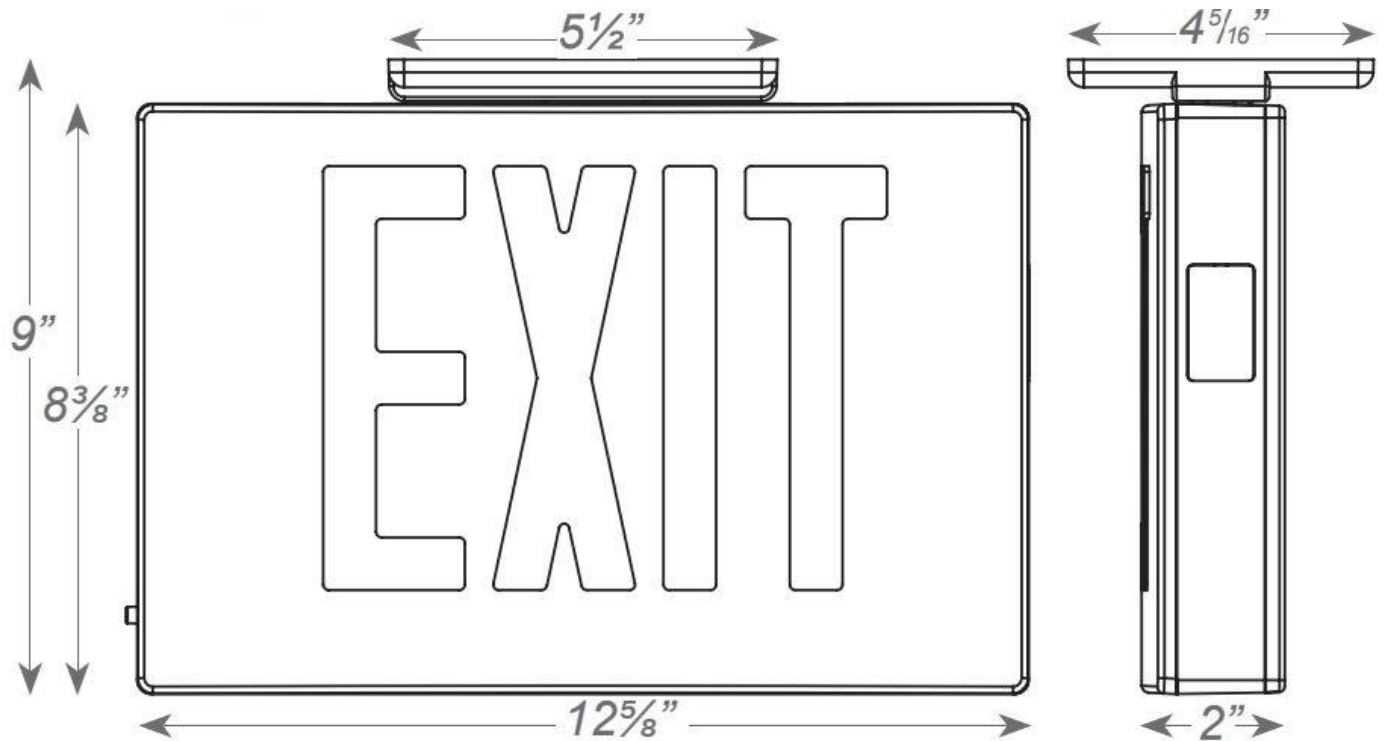

**GlobalLux**  
LIGHTING

© 2019 GlobalLux Lighting, LLC. All rights reserved. For informational purposes only. Reproduction in whole or part is prohibited without prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequences of its use. GlobalLuxLighting reserves the rights make changes in specification at any time without notice.

**GlobalLux Lighting LLC**  
www.globalluxlighting.com  
2037 S. Vineyard Ave  
Ontario, CA 91761  
Ph: 909-591-7506