



Project	
Notes	
Type	Date
Cat. No.	

FOE™ Series

Fixed Optics Emergency Light



APPLICATIONS

The FOE series combines an aesthetically appealing design and dependable performance, accommodating virtually any application. This attractive series is complemented with the ruggedness and simplicity of high impact totally universal thermoplastic housing. Provides a minimum of 90 minutes of illumination for the rated wattage upon loss of AC power. Ideal for applications requiring attractive unit equipment with quick installation.

Specification Features



Construction

Injection molded, engineering grade 5VA flame retardant, high impact resistant thermoplastic in white or black finish.

Qualifications

Meets UL924, NFPA 11 life safety Code, NEC, OSHA Local and State Codes. UL listed for damp locations (0° C - 40° C).

Warranty

5-year Limited Warranty on all electronics and housing. Battery pro rated for 5 years.

Electrical

Dual 120/277 voltage. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. 3.6 long-life, maintenance - free, rechargeable NiCad Battery. Internal solid-state transfer switch automatically connects the internal battery to the LED lamp head for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharging a discharged battery in 24 hours.

Installation

Universal knockout pattern on back plate for surface mount. (Snaps into place making electric connections). Suitable for wall or ceiling mount.

FOE Series

Limited Warranty 5-years

Quick Ship

Made to order only

Ordering Information

Example: FOE-W-EM5

FOE	W	EM				
Series FOE Fixed Optics Emergency Light	Housing B - Black W - White	Options SD - Self Diagnostic RC - Remote Capable EM - Ni-Cad Battery				

Specifications and Dimensions subject to change without notice.

Performance Summary

Input Voltage	120V/277V
Input Frequency	50/60 Hz
Rated Wattage	2.0
Delivered Lumens	See Performance Table
Efficacy	
CRI	83+, R9 > 0
Available CCT ¹	5000K
Color Consistency ²	5-step MacAdam Ellipse
Rated Life	
L70 ³	> 72,000 hours or > 45,000
Power Factor	> 0.9
THD	< 20%
Dimming	N/A
Operating Temp.	-18°C to 40°C

Performance Data

NOTES:


- ¹ Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.
- ² Energy star listed
- ³ Quick ship: 3000K. Other CCTs may require a lead time or be special order.
- ⁴ Typical color consistency. May vary or be changed.
- ⁵ L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact manufacturer for detailed information
- ⁶ Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.



Specifications and Dimensions subject to change without notice.

Product Dimensions

FOE

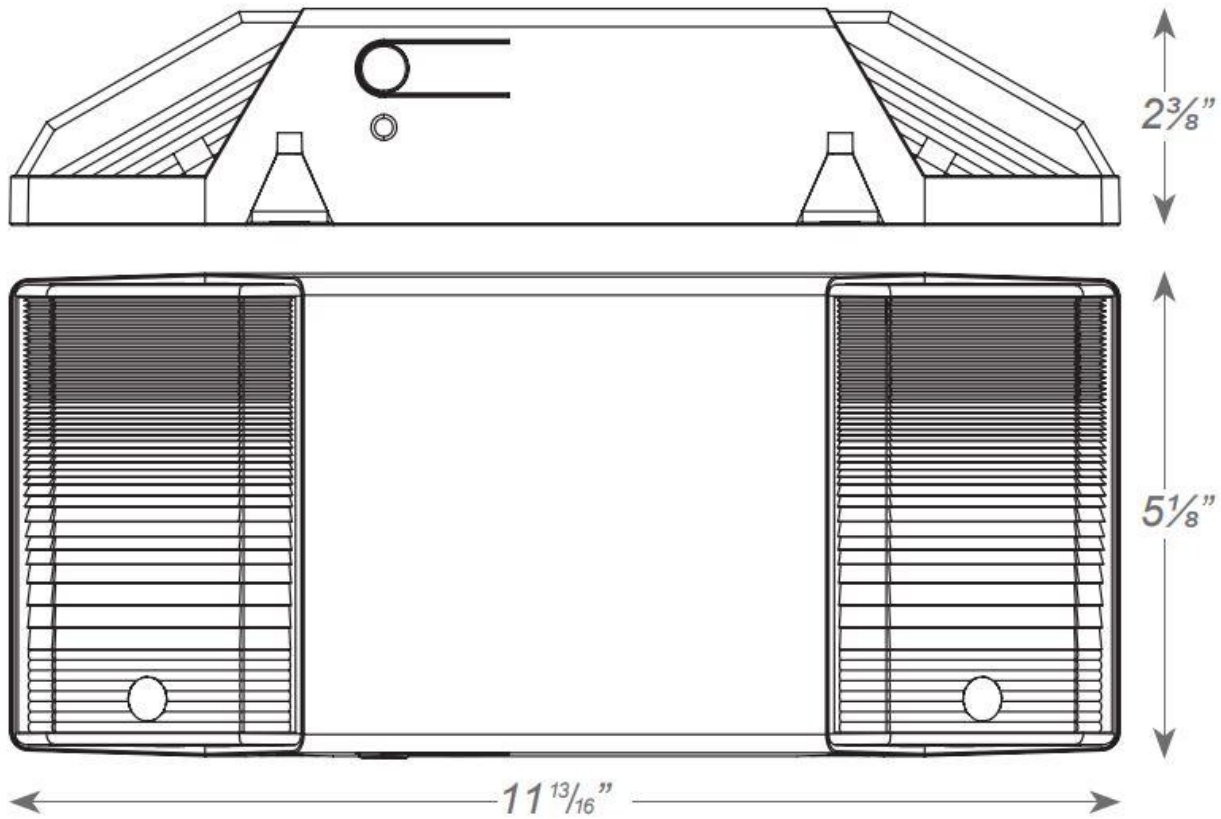

© 2019 GlobalLux Lighting, LLC. All rights reserved. For informational purposes only. Reproduction in whole or part is prohibited without prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequences of its use. GlobalLuxLighting reserves the rights make changes in specification at any time without notice.

GlobalLux Lighting LLC
www.globalluxlighting.com
2037 S. Vineyard Ave
Ontario, CA 91761
Ph: 909-591-7506