



Project	
Notes	
Type	Date
Cat. No.	

**LXS™ Series**

**LED Exit Sign**



**LXS Series**

Limited Warranty 5-years

Quick Ship

LXS-2-W-R  
LXS-2-W-G

**APPLICATIONS**

The LXS series is a compact low profile Exit sign that combines an attractive, easy-to-install; compact contemporary design with proven, ultra-reliable electronics to provide the very best in energy efficient emergency lighting. LXS units are completely self-contained, and feature universal mounting, canopy included. Ideal for application requiring attractive, quick-installation exit sign and low energy consumption.



**Specification Features**

**Construction**

Injection molded, engineering grade 5VA flame retardant, high impact resistant thermoplastic in white or black finish. Aesthetically pleasing, curved face, rounded corner indicators. EZ snap-out Chevron directional indicators.

**Qualifications**

Meets UL924, NFPA 11 life safety Code, NEC, OSHA Local and State Codes. UL listed for damp locations ( 0° C - 50° C ).

**Warranty**

5-year Limited Warranty on all electronics and housing. Battery pro rated for 5 years.

**Electrical**

Dual 120/277 voltage. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. 1.2V long-life, maintenance - free, rechargeable NiCad Battery. Internal solid-state transfer switch automatically connects the internal battery to the LED lamp head for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharging a discharging battery.

**Installation**

Universal mounting pattern knock-out in back plate for J-Box mounting. EZ-Snap mounting canopy included for top or end mount.

**Ordering Information**

Example: LXS-2-W-R

LXS	2	W	R	EM	SD	
<b>Series</b> LXS LED Exit Sign	<b>Faces</b> 2	<b>Housing</b> B - Black W - White	<b>Lettering</b> R - Red G - Green	<b>Battery</b> EM - Ni-Cad Battery AC - AC only	<b>Options</b> SD - Self Diagnostic RC- Remote capable	

Specifications and Dimensions subject to change without notice

## Performance Summary

Input Voltage	120V/277V
Input Frequency	50/60 Hz
Rated Wattage	See Performance Table
Operating Temp.	-18°C to 40°C

## Performance Data

Lens Type	Form Factor	Catalog No.	Rated Wattage (W)
None		LXS-2-W-R	1
		LXS-2-W-G	1

### NOTES:


- <sup>1</sup> Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.
- <sup>2</sup> Typical color consistency. May vary or be changed.
- <sup>3</sup> Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.



Specifications and Dimensions subject to change without notice

## Product Dimensions

LXS

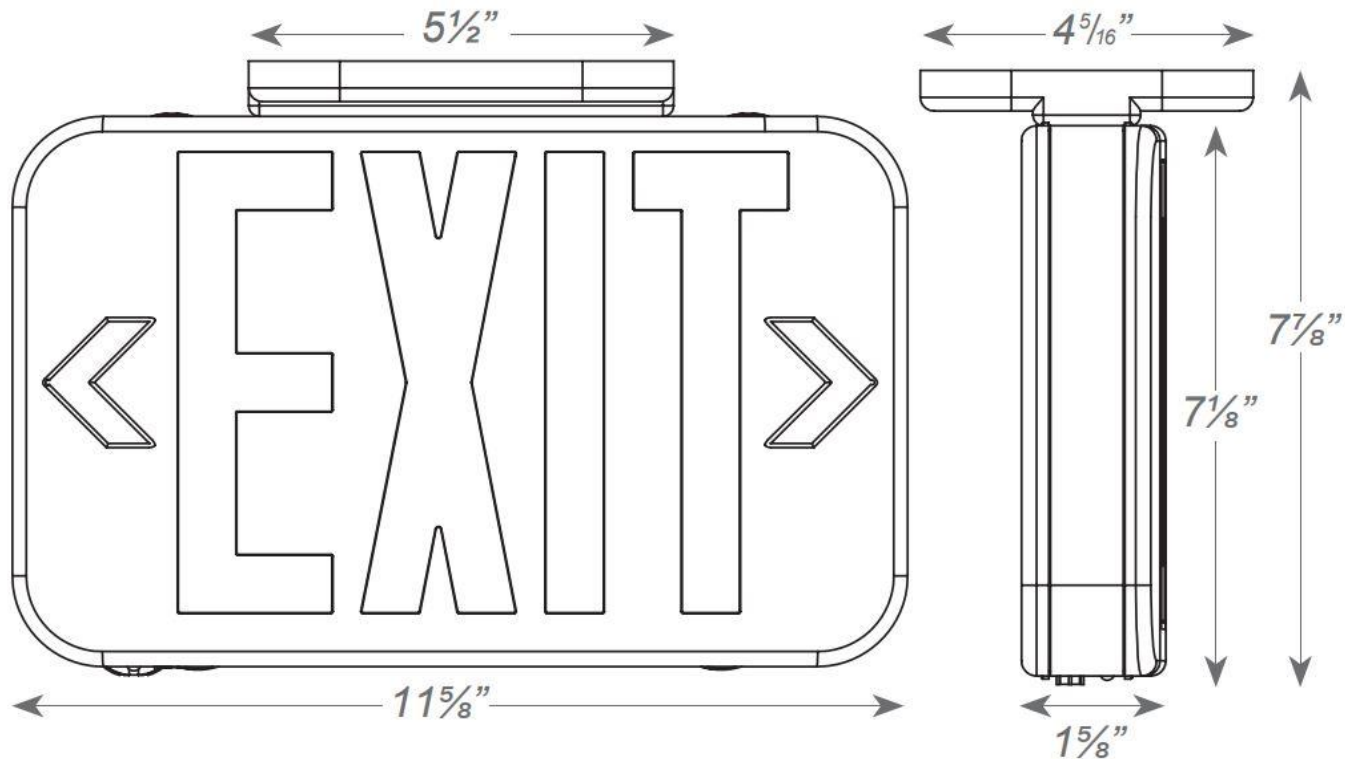

**GlobalLux**  
LIGHTING