

# FACTORY LED OR HALOGEN?

How to remove your rear lights and check.

**DIFFICULTY:** 



NOVICE

**EXPERT** 

#### **TOOLS REQUIRED:**


**SCREWDRIVER** 



**HANDS** 



### STEP 1

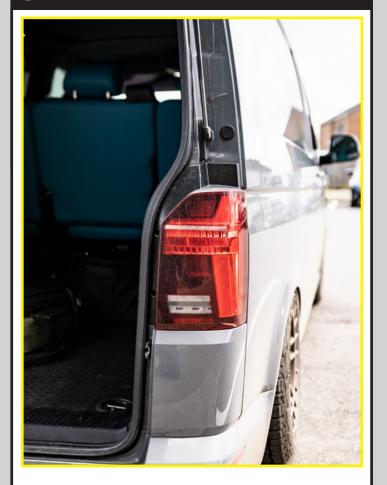

OPEN YOUR TAILGATE REAR DOOR. BARN DOOR MODELS HAVE A DIFFERENT LISTING

#### STEP 2



REMOVE THE TWO SCREWS HOLDING THE LIGHT IN PLACE

#### STEP 3a DRIVER SIDE




IN THE OUTWARD DIRECTION, GIVE THE LIGHT UNIT A SHARP KNOCK WITH YOUR FIST

#### STEP 3b PASSENGER SIDE



IN THE OUTWARD DIRECTION, GIVE THE LIGHT UNIT A SHARP KNOCK WITH YOUR FIST

#### STEP 4

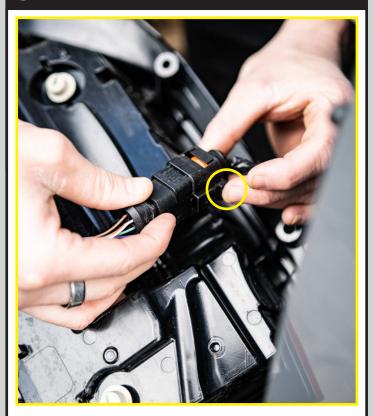


PINCH TAB ON THE CONNECTOR

#### STEP 5



WHILE MAINTAINING PRESSURE, PULL APART TO RELEASE THE CONNECTOR

## STEP 6

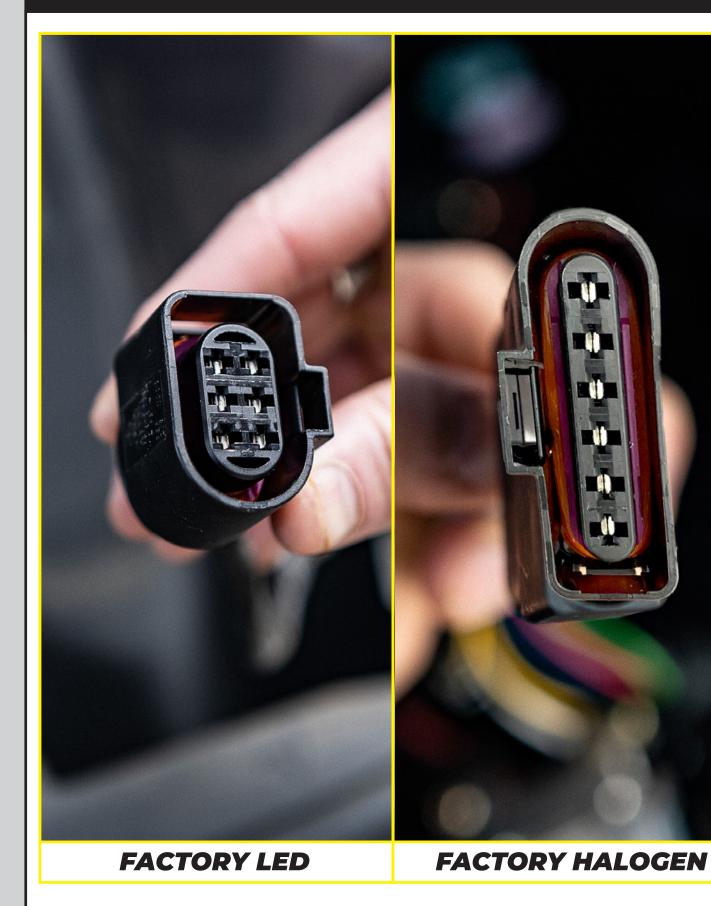

INSPECT YOUR CONNECTOR AND IDENTIFY THEM USING THE ABOVE IMAGE REFERENCE