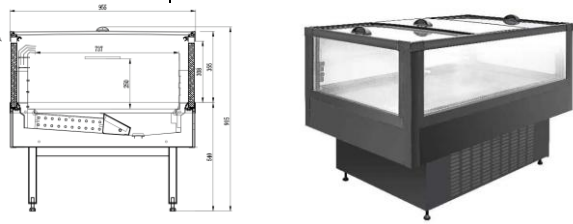



	Double temperature island Cabinet(with door)			Double temperature island Cabinet(without door)		
						
Model	HIT-7	HIT-8	HIT-9	HIT-10	HIT-11	HIT-12
Product identification						
Product description	Double temperature island Cabinet					
Cooling system (Static / No Frost)	VENTILATDE					
Refrigeration type	F					
Climate class (3= 25°C, 60%RH)	3					
Temperature range	L1/M1					
Approval						
Key features						
Total net capacity(L)	215					
Display Area(M2)	1.81					
Defrosting (Manual-Automatic)	Automatic					
Kind of coolant(R134a/R404a/R600a)	R290					
Foaming components	C-P					
Technical data						
Voltage / frequency/Phase	115-230v/50-60hz/1ph					
Input power(W)	900					
Compressor power(W)	640					
Frost power(W)	1500					
Safety class	I					
Thickness of cabinet walls (mm)	56-95					
Operating current(A)	6					
Defrost	Automatic(hot gas)					
Defrost per day NO	3					
Max deforst length minutes	20(freezer)/25(chiller)					
Equipment & accessories						
Inside walls	Prepainted aluminum					
Type of door	silding door					
Number of glass door	3					
Compressor	Embraco*2					
Evaporator	Copper-aluminium fin					
Evaporator fan	Sanju					
Condensor	Copper-aluminium fin					
Condensor fan	Yongrong					
Heater in door frame for anti-icing	Without					
Lock	Without					
Baskets Divider for super market	Without					
Defrost drain	High-pressure tube+heater					
Interior light	Option					
Price tag	NO					
thermostat	Hongke					
Type of Throttle	Capillary Tube					
Plug (G/JK/IT/CH/EU)	On your optional					
Adjustable feet	YES					
Product net dimensions						
Inside dimension (W / D/ H)(mm)	1390*760*360					
Unit dimensions (W / D/ H)(mm)	1500*951*895					
Packing dimensions & loadability						
Packing	Wood base + wood frame					
Packing dimensions (W / D/ H)(mm)(wood frame)	1620*1080*1130					
Packing	Plywood base+all plywood					
Packing dimensions (W / D/ H)(mm)(all plywood)	1580*1030*1130					