





• ^{Foam} Safe • Fast Bond • High ^{Yiell}



MABLE, CONTENTS UNDER PRESSURE EVEN ATTON AND SKIN CONTACT. MAY CAUSE HAT URSING INFANT. See back panel for additional press and the second se



BUILD WITH CONFIDENCE

FOAM BOND 60

- Eliminates the need for fasteners to secure positioning of smaller foam shapes
- Adheres to wood, metal, foam and concrete
- Fast and easy application process

Time is money, and the new TYTAN Professional Foam Bond 60 Foam Adhesive saves both. TYTAN Professional Foam Bond 60 is a multipurpose foam adhesive with high adhesion to many materials and substrates. It has a fast initial tack after only 60 seconds and does not expand significantly while curing, ensuring the stability of bonded elements and preventing any deformation.

TYTAN Professional Foam Bond 60 performs well on damp surfaces and has excellent bond strength on a range of popular construction materials – specifically all foam panel technologies, including architectural foam shapes. It cures by absorbing moisture from the air, so high humidity speeds up the process. The low-odor, solvent-free formula also ensures that it will not degrade the foam over time.

APPLICATIONS:

- Works on all foam panel technologies
- Adheres to wood, metal, foam
- and concrete

STANDARDS & APPROVALS:

UL Classified

PARAMETERS

| Contents | 24oz |
|----------------|----------------------|
| Yield | 600 ft (1/2 in bead) |
| Ambient Temp | 32° to 104°F |
| Can Temp | 41° to 95°F |
| Working Time | 3 min |
| Full Cure Time | 24 hrs |
| Shelf Life | 12 mos |
| | |

BENEFITS:

- Fast and easy application process
- Foam safe (does not degrade XPS)
- No solvents low odor

Eliminates the need for fasteners to secure positioning of smaller foam shapes

486 Century Lane Holland, MI 49423 616.994.8959 tytan.com/us



FAST AND EASY APPLICATION:




LOW EXPANSION FORMULA prevents displacement of foam shapes



WILL NOT DETERIORATE FOAM



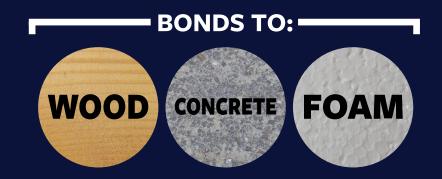



BUILD WITH CONFIDENCE