

BTGAB9








PRODUCT FEATURES

- Single glazed sliding rear doors
- Four adjustable shelves - flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Ambient converted from heated
- Air removal fan installed in ceiling
- Solid front or sliding front doors

Maximum shelf load weight 15kg spread evenly

BTGAB9-SD

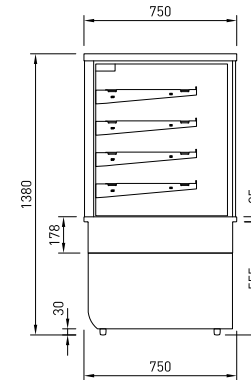

REAR VIEW

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

MODEL	CABINET				SHELVING	OPERATING TEMP	SHELF	BASE TRAY	TOTAL FOOD	DISPLAY M ²	INTERNAL VOLUME M ³	FREQUENCY	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]									DEG C	W X D	W X D	100MM UNITS		KW 230V	AMP	NZ/AUS 3 PIN	UK 13 AMP
BTGAB9 BTGAB9-SD	900	750	1380	146	4 + BASE	N/A	790 X 445	840 x 510	168	1.83	0.45	50/60 HZ	0.06	0.25	10 AMP	3 PIN PLUG	220-240V	1000	830	1550	140