

ecomaxTM
by **HOBART**

GLASSWASHER
G404



 made in germany

ECOMAX G404 GLASSWASHER

ecomaxTM
by **HOBART**

The fast and reliable glasswasher in compact design.
Perfect for start-ups, small bars or restaurants.

Glasswasher ecomax G404

Cycle times*	60 / 120 sec.
Capacity per hour*	up to 60 racks
Wash/rinse temperature	approx 55° C / approx 60° C
Tank capacity	10 l
Fresh water consumption/rack	2.0 l
Wash pump	0.18 kW
Heating booster/tank	1.9 kW
Total loading	2.1 kW
Rated voltage	240 / 50 / 1 - 15A
Width/Depth/Height	436 / 534 / 700 mm
Loading height	308 mm
Rack size	400x 390 mm


* hot water connection **with 400/50/3
The installation of machines with integrated water softener requires a back-flow safety device (at site) according to DVGW-DIN 1988.
Required supply pressure: with integral rinse pressure pump: 0.8 to 6 bar; without integral rinse pressure pump: 2 to 6 bar

PRODUCT ADVANTAGES

- Electronic control with digital temperature indication
- Flat surface of control panel
- 2 selectable wash cycles
- Rotating top and bottom wash system to distribute the wash water evenly over the dishes
- Indented nozzles prevent blocking
- Thermostop-function for guaranteed temperatures
- Integrated self-cleaning cycle
- Removal of rinse arms without any tools
- USB connection for easier service access
- Easy access to all parts
- Deep drawn rack track
- Door safety lock
- Double-walled insulated front door
- Integrated cycle counting, e.g. for control of water treatment system

STANDARD EQUIPMENT

- Glass rack with 4 sloped rows 139321-57
- Cutlery basket CB1
- Heater with thermostat control
- Electric cable, flexible water supply hose and drain hose
- Rear panelling

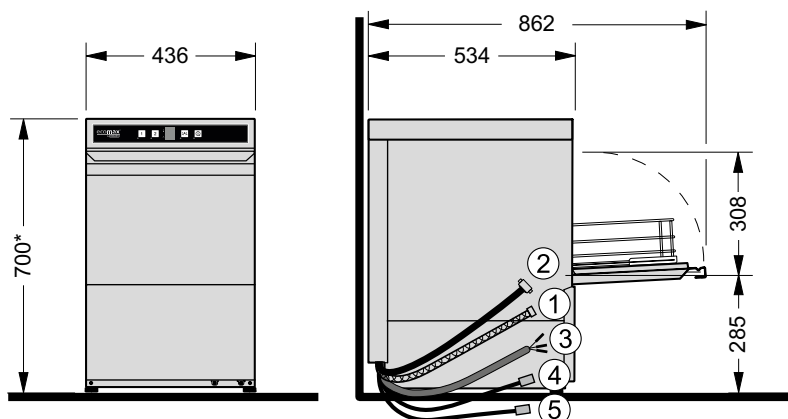

* + 40 mm adjustable feet

CONNECTIONS

① Drain hose	2,000 mm ID20/OD25
② Supply hose	2,000 mm R 3/4"
Required flow rate	5 l/min
Flow pressure	3.0 -6 bar (300-600 kPa)
Max. supply water temperature	60 °C
③ Power cord	2,000 mm
Supply hose for	
④ Detergent	2,500 mm
⑤ Rinse aid	2,500 mm