



V 1.0 01/2019

# **AIRLIE**EAL601-100/150/200 DL


Read this user guide carefully before installation, and keep for future reference.


### INSTALLATION GUIDE

- ▲ The installation and maintenance work should be performed by a qualified electrician.
- ▲ Isolate power before installation.
- ▲ Warranty void if product had been altered or tampered with.

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (Im)	COLOUR TEMPERATURE (K)	BEAM ANGLE	CRI	DIMENSIONS (ØxH) (mm)	IP	IK	FITTING COLOUR
EAL601-100 DL	240	100	15000	5000	110	>80	280 x 188	65	10	Black
EAL601-150 DL	240	150	22500	5000	110	>80	280 x 188	65	10	Black
EAL601-200 DL	240	200	30000	5000	110	>80	320 x 188	65	10	Black

- Drill a 10mm hole at the position where you want to install the fixture
- Push the installation hook into the hole and secure it by tightening the nut
- Hang the fixture on the hook directly or by using a suspension chain
- Connect the power cable to the power line



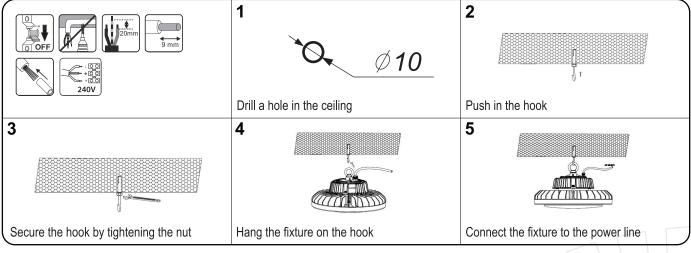

## WARRANTY

In accordance with **elekzon**'s standard terms and conditions of sale, **elekzon** warrant this product to be free from defects in materials and or workmanship for a period as stated below for goods not subject to incorrect installation, maintenance, operation, mishandling, environmental, unauthorised modifications or electrical operating conditions outside the nominated product specification as detailed in these installation instructions. The benefits to you given by this warranty are in addition to other rights and remedies you have under law. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

#### Warranty term - Sixty(60) months from date of purchase.

#### NOTE:

**elekzon** encourages recycling, please consider the environment when disposing off packaging and components. As a guide for continual operation installations, a twelve (12) hour duration for Industrial and Commercial applications and six (6) hour duration for Residential applications should be considered.

