





**THREE COLOUR TEMPERATURE IN ONE LED BATTEN**

- Pressed steel housing
- Powder coated finish
- Opal polycarbonate LED diffuser
- SMD LED chips
- Constant current LED driver fitted
- Non-dimmable
- IP50
- CRI>80
- Power factor: >0.95
- Efficacy: >105lm/W
- Lifespan:50,000Hrs
- Operating Ambient Temp: -20~40°C
- Electrical Classification: Class I
- Warranty: 5 Years

**BONDI**

**EBL301-60 TC**  
**EBL301-120 TC**

Simply Toggle The Switch To Choose The Desired CCT

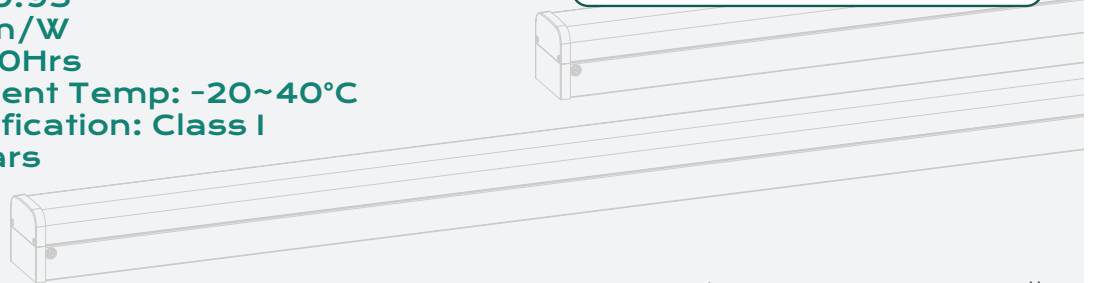

**TECHNICAL SPECIFICATIONS**

MODEL NO.	INPUT VOLTAGE	POWER	COLOUR TEMPERATURE	LUMEN	BEAM ANGLE	DIMENSIONS (L×W×H)	FITTING COLOUR
EBL301-60 TC	240V	20W	3000/4000/5700K	2100/2200/2300lm	120°	615×71×76 mm	White
EBL301-120 TC	240V	40W	3000/4000/5700K	4200/4400/4300lm	120°	1221×71×76 mm	White