




TILTABLE RECESSED LED DOWNLIGHT

- Die-casting Aluminium body
- Powder coated finish
- Polycarbonate reflector
- CREE COB LED chips
- Come with constant current LED driver
- Leading & Trailing edge dimming
- IP44 weatherproof front only
- 1.2m Flex & Plug
- CRI>90
- Power factor: >0.8
- Efficacy: 75lm/W
- Lifespan: 50,000Hrs
- Tiltable
- Operating Ambient Temp: -15~45°C
- Electrical Classification: Class II
- Warranty: 5 Years

DAINTREE

EDL104-2 WW WH

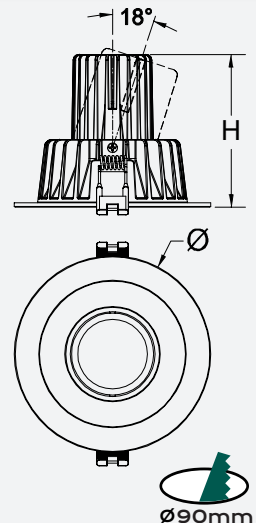

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE	POWER	LUMEN	COLOUR TEMPERATURE	BEAM ANGLE	DIMENSIONS (Ø×H)	FITTING COLOUR
EDL104-2 WW WH	240V	12W	900lm	3000K	60°	110 x 86 mm	White